

1
2
3
4

**RENEWAL APPLICATION
CHAPTER F**

RCRA CONTINGENCY PLAN

**RENEWAL APPLICATION
CHAPTER F**

RCRA CONTINGENCY PLAN

TABLE OF CONTENTS

1		
2		
3		
4		
5		
6		
7		
8		
9	List of Tables	F-iii
10	List of Figures	F-iii
11	List of Drawings	F-iv
12	Introduction.....	F-1
13	F-1 General Information	F-1
14	F-1a Disposal Phase Overview	F-4
15	F-1b Waste Description	F-4
16	F-1c Containers.....	F-5
17	F-1d Description of Containers.....	F-6
18	F-1e Description of Surface Hazardous Waste Management Units	F-6
19	F-1e(1) CH Bay Operations	F-7
20	F-1e(2) RH Complex Operations.....	F-7
21	F-1e(3) Parking Area Container Storage Unit (Parking Area Unit.....	F-8
22	F-1f Off-Normal Events.....	F-8
23	F-1g Containment	F-8
24	F-2 Response Personnel.....	F-9
25	F-3 Implementation.....	F-11
26	F-4 Emergency Response Method.....	F-13
27	F-4a Notification.....	F-14
28	F-4a(1) Initial Emergency Response and Alerting the RCRA Emergency Coordinator ...	F-14
29	F-4a(2) Communication of Emergency Conditions to Facility Employees.....	F-16
30	F-4a(3) Notification of Local, State, and Federal Authorities	F-17
31	F-4a(4) Notification of the General Public	F-19
32	F-4b Identification of Hazardous Materials.....	F-19
33	F-4c Assessment of the Nature and Extent of the Emergency.....	F-20
34	F-4d Control, Containment, and Correction of the Emergency	F-21
35	F-4d(1) All Emergencies.....	F-21
36	F-4d(2) Fire.....	F-23
37	F-4d(3) Explosion	F-25
38	F-4d(4) Spills	F-26
39	F-4d(5) Decontamination of Personnel.....	F-27
40	F-4d(6) Control of Spills or Leaking or Punctured Containers of CH and RH TRU Mixed	
41	Waste.....	F-28

1	F-4d(7) Natural Emergencies.....	F-31
2	F-4d(8) Roof Fall	F-32
3	F-4d(9) Structural Integrity Emergencies	F-35
4	F-4d(10) Emergency Termination Procedures.....	F-35
5	F-4e Prevention of Recurrence or Spread of Fires, Explosions, or Releases	F-37
6	F-4f Management and Containment of Released Material and Waste	F-38
7	F-4g Incompatible Waste.....	F-40
8	F-4h Post-Emergency Facility and Equipment Maintenance and Reporting.....	F-41
9	F-4i Container Spills and Leakage.....	F-41
10	F-4j Tank Spills and Leakage	F-42
11	F-4k Surface Impoundment Spills and Leakage.....	F-42
12	F-5 Emergency Equipment	F-42
13	F-6 Coordination Agreements.....	F-42
14	F-7 Evacuation Plan.....	F-44
15	F-7a Surface Evacuation On-site and Off-site Staging Areas	F-45
16	F-7b Underground Assembly Areas and Egress Hoist Stations	F-45
17	F-7c Plan for Surface Evacuation	F-46
18	F-7d Plan for Underground Evacuation.....	F-46
19	F-7e Further Site Evacuation	F-46
20	F-8 Required Reports.....	F-47
21	F-9 Location of the Contingency Plan and Plan Revision.....	F-48
22	F-10 List of References.....	F-50

List of Tables

Table	Title
F-1	Hazardous Substances in Large Enough Quantities to Constitute a Level II Incident
F-2	Resource Conservation and Recovery Act Emergency Coordinators
F-3	Planning Guide for Determining Incident Levels and Responses
F-4	Physical Methods of Mitigation
F-5	Chemical Methods of Mitigation
F-6	Emergency Equipment Maintained at the Waste Isolation Pilot Plant
F-7	Types of Fire Suppression Systems by Location
F-8	Hazardous Release Reporting, Federal
F-9	Hazardous Release Reporting, State of New Mexico

List of Figures

Figure	Title
F-1	WIPP Surface Structures
F-1a	Legend to Figure F-1
F-2	Spatial View of the WIPP Facility
F-3	WIPP Underground Facilities
F-4	Direction and Control Under Emergency Conditions in Which the Plan Has Been Implemented
F-4a	WIPP Facility Emergency Notifications
F-5	Underground Emergency Equipment Locations and Underground Evacuation Routes
F-6	Fire-Water Distribution System
F-7	Underground Diesel Fuel-Station Area Fire-Protection System
F-8	WIPP On-Site Assembly Areas and WIPP Staging Areas
F-8a	RH Bay Evacuation Routes
F-8b	RH Bay Hot Cell Evacuation Route
F-8c	Evacuation Routes in the Waste Handling Building
F-9	Designated Underground Assembly Areas
F-10	Waste Handling Building Pre-Fire Survey (First Floor)
F-10a	Waste Handling Building Pre-Fire Survey (First Floor - Fire Hydrant/Post Indicator Location)
F-11	Waste Handling Building Pre-Fire Survey (Second Floor)
F-11a	Waste Handling Building Pre-Fire Survey (Second Floor - Fire Hydrant/Post Indicator Location)
F-12	WIPP Hazardous Materials Incident Report

List of Drawings

	Drawing	Title
1		
2		
3		
4		
5	41-F-087-014	Waste Handling Building 411 Fire Water Collection System Flow
6		Diagram

1 Unit (**WHB Unit**) and the Parking Area Container Storage Unit (**Parking Area Unit**), located
2 south of the WHB, and the areas below ground in which waste will be emplaced.

3
4 The WIPP facility includes other surface structures, shafts, and underground areas (Figures F-1,
5 F-2, and F-3). Surface structures other than the WHB, that support TRU mixed waste
6 management include:

7
8 Exhaust Filter Building - houses the filter banks to which the underground ventilation can
9 be diverted in the unlikely event of an underground release of radionuclides.

10
11 Guard and Security Building - houses the facility security personnel and communications
12 equipment necessary for them to perform their duties. Section F-4a specifies the duties
13 of the security officers relative to contingency actions.

14
15 Safety and Emergency Services Building - houses the surface emergency response
16 vehicles (fire truck, rescue truck, ambulance), Health Services (first aid), Emergency
17 Operations Center (**EOC**), and the Dosimetry Laboratory. The Hazardous Material
18 Response Trailer is staged at the WIPP facility in an area that is readily accessible to
19 Emergency Services. Emergency Services is located in Building 452. Table F-6
20 describes emergency equipment and associated locations.

21
22 Support Building - houses the Central Monitoring Room (see section F-4a).

23
24 Transuranic Package Transporter-II (**TRUPACT-II**) Maintenance Facility - is located
25 west of the CH bay. No TRU mixed waste management activities will occur in this
26 facility.

27
28 Surface facilities used for storage of support equipment are identified in Table F-6.

29
30 Building 452, Safety and Emergency Services Facility, houses the emergency response vehicles,
31 emergency equipment, the mine rescue room, mine rescue team equipment, and the ~~Emergency~~
32 ~~Operations Center~~ (EOC). The Hazardous Material Response Trailer is staged at the WIPP
33 facility in an area readily accessible to Emergency Services. Emergency Services is located in
34 Building 452.

35
36 The RCRA Renewal Application addresses TRU mixed waste management activities in the
37 WHB Unit, the Parking Area Unit, and the disposal units. The provisions of this Contingency
38 Plan apply to hazardous waste disposal units (**HWDU**) in the underground waste disposal panels,
39 storage in the WHB Unit and the Parking Area Unit, the Waste Shaft, and supporting TRU
40 mixed waste handling areas. The remainder of the facility will not manage TRU mixed waste.
41 This Contingency Plan has also been designed in accordance with 20.4.1.300 NMAC
42 (incorporating 40 CFR § 262.34(a)(4) - Standards for Generators of Hazardous Waste), and will
43 be implemented whenever there is a fire, explosion, or release of hazardous waste which could
44 threaten human health or the environment. Hazardous substances in the remainder of the facility
45 are included as possible triggers of the Contingency Plan but are outside the scope of the

1 regulations promulgated pursuant to RCRA. This allows WIPP to maintain one emergency
2 response plan which is consistent with the National Response Teams Integrated Contingency
3 Plan Guidance (Federal Register, Vol. 61, No. 109, June 5, 1996). Inclusion is based on their
4 National Fire Protection Association (NFPA) ratings in addition to their storage quantities. The
5 majority of hazardous substances on-site are not expected to trigger the Contingency Plan
6 because they are present in the same form and concentration as the product packaged for
7 distribution and use by the general public or are used in a laboratory under the direct supervision
8 of a technically qualified individual. Superfund Amendments and Reauthorization Act (SARA)
9 Title III excludes these from emergency planning reporting. The list of hazardous substances in
10 large enough quantities to constitute a Level II incident (Section F-3) is provided in Table F-1.
11 In addition to TRU mixed waste, these are the only hazardous substances currently on site which,
12 if spilled, may be of sufficient impact to cause this Contingency Plan to be implemented.
13 Magnesium Oxide (MgO) is stored on-site in large quantities. It is used as backfill in the waste
14 emplacement rooms as a pH buffer. The pH buffer will limit the solubility of radionuclides after
15 the underground rooms are filled and closed. The MgO backfill is not a hazardous substance; a
16 release of MgO will not create hazardous waste and poses no threat to human health or the
17 environment, and is therefore not addressed in the Contingency Plan.
18

19 Wastes generated as a result of maintenance or response actions will be categorized into one of
20 three groups and disposed of accordingly. These are: 1) nonhazardous wastes to be disposed of
21 in an approved landfill, 2) hazardous nonradioactive wastes to be disposed of at an off-site
22 RCRA permitted facility, and 3) TRU mixed waste to be disposed of in the underground
23 HWDUs. Disposal of TRU mixed waste in the WIPP facility is subject to regulation under
24 20.4.1.500 NMAC. As required by 20.4.1.500 NMAC (incorporating 40 CFR §264.601), the
25 Permittees will demonstrate that the environmental performance standards for a miscellaneous
26 unit, which are applied to the HWDUs in the underground, will be met. In addition, the technical
27 requirements of 20.4.1.500 NMAC (incorporating 40 CFR §264.170 to §264.178) are applied to
28 the operation of the container storage units in the WHB Unit and in the Parking Area Unit south
29 of the WHB. Liquid wastes that may be generated as a result of the fire fighting water or
30 decontamination solutions will be managed as follows:
31

32 Non-Mixed - Hazardous waste liquids contaminated only with hazardous constituents
33 will be placed into containers and managed in accordance with 20.4.1.300 NMAC
34 (incorporating 40 CFR §262.34) requirements. The waste will be shipped to an approved
35 off-site treatment, storage, or disposal facility.
36

37 Mixed - Liquids contaminated with TRU mixed waste (inside the WHB Unit) will be
38 solidified as they are placed into containers with cement, Aquaset, or absorbent material
39 in them. The solidified materials will be disposed of in the underground WIPP repository
40 as derived waste.
41

42 This chapter of the Renewal permit Application describes the HWDUs, the TRU mixed waste
43 management facilities and operations, compliance with the environmental performance
44 standards, and with the applicable technical requirements of 20.4.1.500 NMAC (incorporating 40
45 CFR §264.170 to §264.178 and §264.601, respectively). The configuration of the WIPP facility

1 consists of completed structures; including all buildings and systems for the operation of the
2 facility.

3
4 F-1a Disposal Phase Overview

5 The Disposal Phase will consist of receiving CH TRU mixed waste shipping containers,
6 unloading and transporting the waste containers to the underground HWDUs, emplacing the
7 waste in the underground HWDUs, and subsequently achieving closure of the underground
8 HWDUs in compliance with applicable State and Federal regulations.

9
10 The TRU mixed waste that will be disposed at the WIPP facility results primarily from activities
11 related to the reprocessing of plutonium-bearing reactor fuel and fabrication of plutonium-
12 bearing weapons, as well as from research and development. This TRU mixed waste consists
13 largely of such items as paper, cloth, and other organic material; laboratory glassware and
14 utensils; tools; scrap metal; shielding; and solidified sludges from the treatment of wastewater.
15 Much of this TRU mixed waste is also contaminated with substances that are defined as
16 hazardous under 20.4.1.200 NMAC.

17
18 F-1b Waste Description

19 Waste destined for WIPP are, or were, produced as a byproduct of weapons production and have
20 been identified in terms of waste streams based on the processes that produced them. Each waste
21 stream identified by TRU waste sites generators is assigned to a Waste Summary Category to
22 facilitate RCRA waste characterization, and reflect the final waste forms acceptable for WIPP
23 disposal.

24
25 These Waste Summary Categories are:

26
27 S3000—Homogeneous Solids

28 Solid process residues defined as solid materials, excluding soil, that do not meet the
29 applicable regulatory criteria for classification as debris (20.4.1.800 NMAC
30 (incorporating 40 CFR §268.2[g] and [h])). Included in solid process residues are
31 inorganic process residues, inorganic sludges, salt waste, and pyrochemical salt waste.
32 Other waste streams are included in this Waste Summary Category based on the specific
33 waste stream types and final waste form. This category includes wastes that are at least
34 50 percent by volume solid process residues.

35
36 S4000—Soils/Gravel

37 This waste summary category includes waste streams that are at least 50 percent by
38 volume soil. Soils are further categorized by the amount of debris included in the matrix.

39
40 S5000—Debris Wastes

41 This waste summary category includes waste that is at least 50 percent by volume
42 materials that meet the criteria for classification as debris (20.4.1.800 NMAC
43 (incorporating 40 CFR §268.2)). Debris is a material for which a specific treatment is not
44 provided by 20.4.1.800 NMAC (incorporating 40 CFR §268 Subpart D), including

1 process residuals such as smelter slag from the treatment of wastewater, sludges or
2 emission residues.

3
4 Debris means solid material exceeding a 2.36 inch (60 millimeter) particle size
5 that is intended for disposal and that is: 1) a manufactured object, 2) plant or
6 animal matter, or 3) natural geologic material.

7
8 Included in the S5000 Waste Summary Category are metal debris, lead containing metal
9 debris, inorganic nonmetal debris, asbestos debris, combustible debris, graphite debris,
10 heterogeneous debris, and composite filters, as well as other minor waste streams.
11 Particles smaller than 2.36 inches in size may be considered debris if the debris is a
12 manufactured object and if it is not a particle of S3000 or S4000 material.

13
14 Examples of waste that might be included in the S5000 Waste Summary Category are
15 asbestos-containing gloves, fire hoses, aprons, flooring tiles, pipe insulation, boiler
16 jackets, and laboratory tabletops. Also included are combustible debris constructed of
17 plastic, rubber, wood, paper, cloth, graphite, and biological materials. Examples of
18 graphite waste that would be included are crucibles, graphite components, and pure
19 graphite.

20
21 Wastes may be generated at the WIPP facility as a direct result of managing the TRU and TRU
22 mixed wastes ~~received from the off-site generators~~. Such generated waste may occur in either
23 the WHB Unit or the Underground. For example, when TRU mixed wastes are received at the
24 WHB Unit, the CH or RH Package shipping containers and the TRU mixed waste containers are
25 checked for surface contamination. Under some circumstances,¹ if contamination is detected, the
26 shipping container and/or the TRU mixed waste containers will be decontaminated. In the
27 underground, waste may be generated as a result of radiation control procedures used during
28 monitoring activities. The waste generated from radiation control procedures will be assumed to
29 be TRU and/or TRU mixed waste. Throughout the remainder of this plan, this waste is referred
30 to as "derived waste." All such derived waste will be placed in the rooms in HWDUs along with
31 the TRU mixed waste for disposal.

32 33 F-1c Containers

34 The waste containers that will be used at the WIPP facility qualify as "containers," in accordance
35 with 20.4.1.101 NMAC (incorporating 40 CFR §260.10). That is, they are "portable devices in
36 which a material is stored, transported, treated, disposed of, or otherwise handled."

37

¹Typically contamination that is less than six square feet in area and less than 2000 disintegrations per minute (dpm) alpha or 20,000 dpm beta/gamma, may be decontaminated. Containers that exceed these thresholds will be returned to the point of origin for decontamination.

1 TRU **Transuranic** mixed waste containers, containing off-site waste, will not be opened at the
2 WIPP facility. Derived waste containers are kept closed at all times unless waste is being added
3 or removed.
4

5 Liquid waste, including “derived waste” containing liquids, will not be emplaced in the WIPP.
6 TRU **Transuranic** mixed waste for emplacement in the WIPP shall contain as little residual liquid
7 as is reasonably achievable. All internal containers (e.g., bottles, cans, etc.) will be well-drained,
8 but may contain residual liquids. ~~As a guideline, residual~~ Residual liquids in well-drained containers
9 will be restricted to ~~approximately~~ one percent of the volume of the internal container. In no
10 case shall the total liquid ~~equal or exceed~~ one volume percent of the waste **payload** container
11 (i.e., drum, standard waste box ~~(SWB)~~, ten-drum overpack, or canister).
12

13 Special requirements for ignitable, reactive, and incompatible waste are addressed in 20.4.1.500
14 NMAC (incorporating 40 CFR §264.176 and 177). The RCRA **Renewal Application Permit**
15 Treatment, Storage, and Disposal Facility Waste Acceptance Criteria (**TSDF-WAC**) precludes
16 ignitable, reactive, or incompatible TRU mixed waste from being placed into storage or disposed
17 of at WIPP.
18

19 F-1d Description of Containers

20 ~~CH~~ **Contact-handled** TRU mixed waste containers will be either 55-gallon (**gal**) (208-liter (**L**))
21 drums singly or arranged into seven (7)-packs, 85-gal (321-L) drums (used as singly or arranged
22 into four (4)-packs, 100-gal (379 L) drums singly or arranged into three (3)-packs, ten-drum
23 overpacks (**TDOP**), or 66.3 ft³ (1.88 m³) SWBs.
24

25 **Remote Handled** ~~RH~~ TRU mixed waste containers are either canisters or drums. Canisters will
26 be loaded singly in an RH-TRU 72-B cask and drums will be loaded in a CNS 10-160B cask.
27 Drums in the CNS 10-160B cask will be arranged singly or in drum carriage units containing up
28 to five drums each. Canisters and drums are described in Renewal Application Appendix M1.
29

30 F-1e Description of Surface Hazardous Waste Management Units

31 The WHB is the surface facility where waste handling activities will take place. The WHB has a
32 total area of approximately 84,000 square feet (ft²) (7,804 square meters [m²]) of which 43,554
33 ft² (4,047 m²) are designated as the WHB Unit for TRU mixed waste management. Within the
34 WHB Unit, 26,151 ft² (2,430 m²) are designated for the waste handling and container storage of
35 CH TRU mixed waste and 17,403 ft² (1,617 m²) are designated for the handling and storage of
36 RH TRU mixed waste. These areas are being permitted as container storage units. The concrete
37 floors within the WHB Unit are sealed with an impermeable coating that has excellent resistance
38 to the chemicals in TRU mixed waste and, consequently, provide secondary containment for
39 TRU mixed waste. In addition, a Parking Area Unit south of the WHB will be used for storage
40 of waste in sealed shipping containers awaiting unloading. This area is also being permitted as a
41 container storage unit. The sealed shipping containers provide secondary containment in this
42 hazardous waste management unit (**HWMU**).
43

1 F-1e(1) CH Bay Operations

2 Once unloaded from the Contact-Handled Package, CH TRU mixed waste containers (7-packs of
3 55-gal drums, 3-packs of 100-gal drums, 4-packs of 85-gal drums, SWBs, or TDOPs) are placed
4 in one of two positions on the facility pallet. The waste containers are stacked on the facility
5 pallets (one- or two-high, depending on weight considerations). The use of facility pallets will
6 elevate the waste at least 6 inches (in.) (15 centimeters [cm]) from the floor surface. Pallets of
7 waste will then be stored in the CH bay. This storage area will be clearly marked to indicate the
8 lateral limits of the storage area. This storage area will have a maximum capacity of thirteen
9 facility pallets of waste during normal operations. These pallets will typically be in the CH Bay
10 storage area for a period of up to five days.

11
12 In addition, four Contact-Handled Packages, containing up to 640 ft³ of CH TRU waste in
13 containers, may occupy positions at the TRUPACT-II Unloading Docks (**TRUDOCK**).

14
15 Aisle space shall be maintained in all CH Bay waste storage areas. The aisle space shall be
16 adequate to allow unobstructed movement of fire response personnel, spill-control equipment,
17 and decontamination equipment that would be used in the event of an off-normal event. An aisle
18 space between facility and containment pallets will be maintained in all CH TRU mixed waste
19 storage areas.

20
21 F-1e(2) RH Complex Operations

22 Loaded RH TRU casks are received in the RH Bay of the WHB. The RH Bay is served by an
23 overhead bridge crane used for cask handling and maintenance operations. Storage in the RH
24 Bay occurs in the RH-TRU 72-B or CNS 10-160B casks. A maximum of two loaded casks may
25 be stored in the RH Bay and a maximum of one cask in the Cask Unloading Room may be stored
26 at one time. A minimum of 44 inches (1.1 m) will be maintained between loaded casks in the
27 RH Bay. The cask serves as secondary containment in the RH Bay for the RH TRU mixed waste
28 payload container. In addition, the RH Bay has a concrete floor.

29
30 Single RH TRU mixed waste canisters are unloaded from the RH-TRU 72-B casks in the
31 Transfer Cell of the RH Complex where they are transferred to facility casks. Drums of RH
32 TRU mixed waste will be transferred remotely from the CNS 10-160B cask, into the Hot Cell,
33 and loaded into a canister. Storage in the Hot Cell occurs in either drums or canisters. A
34 maximum of 12 55-gallon drums of RH TRU mixed waste and one 55-gallon drum of derived
35 waste (94.9 ft³ (2.7 m³)) may be stored in the Hot Cell. Except for the derived waste drum,
36 individual 55-gallon drums may not be stored in the Hot Cell for more than 25 days. The
37 Transfer Cell houses the Transfer Cell Shuttle Car, which is used to facilitate transferring the
38 canister to the facility cask. Storage in this area typically occurs at the end of a shift or in an off-
39 normal event that results in the suspension of waste handling. A maximum of one canister (31.4
40 ft³ (0.89 m³)) may be stored in the Transfer Cell in a shielded insert in the Transfer Cell Shuttle
41 Car or in a RH-TRU 72-B cask.

42

1 The Facility Cask Loading Room provides for transfer of a canister to the facility cask for
2 subsequent transfer to the waste shaft conveyance and to the Underground Hazardous Waste
3 Disposal Unit. The Facility Cask Loading Room also functions as an air lock between the waste
4 shaft and the Transfer Cell. Storage in this area typically occurs at the end of a shift or in an off-
5 normal event that results in the suspension of waste handling. A maximum of one canister (31.4
6 ft³ (0.89 m³)) may be stored in the Facility Cask in the Facility Cask Loading Room.
7 Derived waste will be stored in the RH Bay and in the Hot Cell.
8

9 F-1e(3) Parking Area Container Storage Unit (Parking Area Unit)

10 The area extending south from the WHB within the fenced enclosure identified as the Controlled
11 Area on Figure M1-2 is defined as the Parking Area Container Storage Unit. This area provides
12 storage for up to 6,734 ft³ (191 m³) of CH and/or RH TRU mixed waste contained in up to 40
13 loaded Contact-Handled Packages and 8 Remote-Handled Packages. Secondary containment
14 and protection of the waste containers from standing rainwater are provided by the transportation
15 containers. Up to 12 additional Contact-Handled Packages and four additional Remote-Handled
16 Packages may be stored in the Parking Area Surge Area so long as the requirements of ~~Permit~~
17 ~~Conditions III.A.2.c and III.A.2.d~~ Renewal Application Appendix M1, Section M1-1c(2) are
18 met. No more than 50 Contact-Handled and 12 Remote-Handled Packages may be stored in the
19 Parking Area Storage Unit.
20

21 The safety criteria for Contact-Handled and Remote-Handled Packages require that they be
22 opened and vented at a frequency of at least once every 60 days. During normal operations,
23 Contact-Handled and Remote-Handled Packages will not require venting while located in the
24 Parking Area Unit. Any off-normal event which results in the need to store a waste container in
25 the Parking Area Unit for a period of time approaching fifty-nine (59) days shall be mitigated by
26 returning the shipment to the generator prior to the expiration of the 60 day NRC venting period
27 or by moving the Contact-Handled or Remote-Handled Package inside the WHB Unit where the
28 waste will be removed and placed in one of the permitted storage areas or in the underground
29 hazardous waste disposal unit.
30

31 F-1f Off-Normal Events

32 Off-normal events could interrupt normal operations in the waste management process line.
33 Shipments of waste from the generator sites will be stopped in any event which results in an
34 interruption to normal waste handling operations that exceeds three days.
35

36 F-1g Containment

37 The WHB Unit has concrete floors, which are sealed with a coating designed to resist all but the
38 strongest oxidizing agents. Such oxidizing agents do not meet the TSDF-WAC and will not be
39 accepted in TRU mixed waste at the WIPP facility. Therefore, TRU mixed wastes pose no
40 compatibility problems with respect to the WHB Unit floor.
41

42 During normal operations, the floor of the normal storage areas within the CH Bay and RH
43 Complex shall be visually inspected on a weekly basis to verify that it is in good condition and

1 free of obvious cracks and gaps. When a RH TRU mixed waste container is present in the RH
2 Complex, inspections will be conducted visually and/or using closed-circuit television cameras
3 in order to manage worker dose and minimize radiation exposures. Manual inspections of the
4 areas are performed at least annually during routine maintenance periods when waste is not
5 present.

6
7 Floor areas of the WHB used during off-normal events will be inspected prior to use and weekly
8 while in use. Containers located in the permitted storage areas shall be elevated from the surface
9 of the floor. Facility pallets provide at least 6 in (15 centimeters ~~(15 cm)~~) of elevation from the
10 surface of the floor. TRU mixed waste containers that have been removed from Contact-
11 Handled or Remote-Handled Packages shall be stored at a designated storage area inside the
12 WHB so as to preclude exposure to the elements.

13
14 Secondary containment at permitted storage areas inside the WHB Unit shall be provided by the
15 floor. The Parking Area Unit and TRUDOCK storage area of the WHB Unit do not require
16 engineered secondary containment, since waste is not stored there unless it is protected by the
17 Contact-Handled or Remote-Handled Packaging. Floor drains, the fire suppression water
18 collection sump, and portable dikes, if needed, will provide containment for liquids that may be
19 generated by fire fighting. Sump capacities and locations are shown in Drawing 41-F-087-014.
20 Residual fire fighting liquids will be placed in containers and managed as described above.
21 Secondary containment at storage locations inside the RH Bay, Cask Unloading Room, Transfer
22 Cell, and Facility Cask Loading Room is provided by the cask or canisters that contain drums of
23 RH TRU mixed waste. In the Hot Cell, secondary containment is provided by the Hot Cell
24 subfloor. In addition, the RH Complex contains a 220-gallon (833-L) sump in the Hot Cell, a
25 11,400-gallon (43,152-L) sump in the RH Bay, and a 220-gallon (833-L) sump in the Transfer
26 Cell to collect any liquids.

27 28 F-2 Response Personnel

29 Persons qualified to act as the RCRA Emergency Coordinator, as required by 20.4.1.500 NMAC
30 (incorporating 40 CFR §264.55), are listed in Table F-2.

31
32 A RCRA Emergency Coordinator will be on-site at the WIPP facility 24 hours a day, seven days
33 a week, with the responsibility for coordinating emergency response measures. RCRA
34 Emergency Coordinators are listed in Table F-2, where four individuals have been designated
35 primary RCRA Emergency Coordinators. This is because the on-duty Facility Shift Manager
36 (FSM) is designated as the RCRA Emergency Coordinator. The four individuals shown serve as
37 FSM on a rotating shift basis.

38
39 Persons qualified to act as the RCRA Emergency Coordinator are thoroughly familiar with this
40 Contingency Plan, the TRU mixed waste and hazardous waste operations and activities at the
41 WIPP facility, the locations of TRU mixed waste and hazardous waste activities, the locations on
42 the site where hazardous materials are stored and used, and the locations of waste staging and
43 accumulation areas. They are familiar with the characteristics of hazardous substances, TRU
44 mixed waste and hazardous waste handled at the WIPP facility, the location of TRU mixed waste

1 and hazardous waste records within the WIPP facility, and the facility layout. In addition,
2 persons qualified to act as the RCRA Emergency Coordinator have the authority to commit the
3 necessary resources to implement this Contingency Plan. Figure F-4 outlines the RCRA
4 Emergency Coordinator's position relative to other organizations that provide support.

5
6 In addition to the RCRA Emergency Coordinator, the following individuals or groups have
7 specified responsibilities during any WIPP facility emergency:

- 8
- 9 • Assistant Chief Office Warden (ACOW)—Persons assigned to take accountability for
10 sections of the site, and then reporting the accountability to the Chief Office Warden.
 - 11 • Central Monitoring Room Operator (CMRO)—The on-shift operator responsible for
12 Central Monitoring Room (CMR) operations, including coordination of facility
13 communications. The facility log is maintained by the CMRO.
 - 14 • Chief Office Warden (COW)—A predesignated individual with responsibilities for
15 complete surface accountability at staging areas in the event of an evacuation. The Chief
16 Office Warden receives reports from the ACOWs.
 - 17 • Emergency Response Team (ERT)—Supplemental group trained to respond to surface
18 emergencies, to provide emergency first aid, and to respond to releases of hazardous
19 waste or hazardous material. ERT members are part of the WIPP Supplemental
20 Emergency Response Program.
 - 21 • Emergency Services Technician (EST)/ Fire Protection Technician (FPT)—Regular
22 employee whose job is that of full-time emergency responder. During non-emergency
23 conditions, the EST/FPT inspects facility fire suppression systems and emergency
24 equipment. The EST/FPT completes specific sections of ~~a~~ the "WIPP Hazardous
25 Material Incident Report similar to Figure F-12." ~~Additional technical personnel~~
26 ~~complete identified sections of the report.~~
 - 27 • Fire Brigade—The fire brigade is a team of ~~five personnel~~ who respond to site
28 emergencies. The team consists of an Incident Commander and ~~four~~ fire fighters. The
29 fire fighters are trained in accordance with NFPA Standards for Industrial Fire Brigades
30 (Fire Brigades that perform both advanced exterior and interior structural fire fighting).
 - 31 • First Line Initial Response Team (FLIRT)—Supplemental primary responders in the
32 event of a general underground emergency for medical and hazardous material response.
33 The FLIRT also provides backup support for the ERT in the event of a general surface-
34 facility emergency. ~~FLIRT members are part of the WIPP Supplemental Emergency~~
35 ~~Response Program.~~
 - 36 • Mine Rescue Team (MRT)—Supplemental group responsible for underground reentry
37 and rescue after an emergency evacuation. The MRT responds in accordance with 30

1 CFR Part 49 requirements. ~~MRT members are part of the WIPP Supplemental~~
2 ~~Emergency Response Program.~~

- 3 • Office Warden—An individual assigned responsibility for assuring that personnel are
4 evacuated from his/her assigned area or building during evacuations. Office Wardens
5 maintain a list of all personnel in their specific area. This list is compared with the
6 physical presence of personnel who assemble at the staging areas. The Office Wardens
7 report area accountability to the ACOWs.

- 8 • EOC Staff-The EOC consists of a minimum staff of three MOC management positions
9 (the Crisis Manager, a Safety Representative, and an Operations Representative) to
10 activate the EOC. The full EOC Staff includes the Crisis Manager, the Deputy Crisis
11 Manager, a Safety Representative, an Operations Representative and the EOC
12 Coordinator. Additional technical and logistics personnel will provide support as
13 necessary. The EOC is activated by the FSM. Since the EOC staff are is performing
14 duties similar to their normal job functions and providing support related to their area of
15 expertise, no specific RCRA training is required.

16 F-3 Implementation

17 The provisions of this Contingency Plan will be implemented immediately whenever there is an
18 emergency event (e.g., a fire, an explosion, or a natural occurrence that involves or threatens
19 hazardous or TRU mixed wastes or a release of hazardous substances, hazardous materials, or
20 hazardous wastes) that could threaten human health or the environment, or whenever the
21 potential for such an event exists as determined by the RCRA Emergency Coordinator, as
22 required under 20.4.1.500 NMAC (incorporating 40 CFR §264.51(b)). The following
23 information is utilized for categorization of events to determine implementation of the
24 Contingency Plan:

- 25 1. Medical Emergencies (does not implement the Contingency Plan)
- 26 2. Non-emergency (does not implement the Contingency Plan)
 - 27 a. Fire already out, did not involve any hazardous materials.
 - 28 b. Spill or release involved materials excluded according to the SARA Title III,
29 Statute 42 U.S.C. 11021 (e). Such as:
 - 30 1) Any substance present in the same form and concentration as product
31 packaged for distribution and use by the general public. (Example:
32 Cleaning solutions)
 - 33 2) Any substance to the extent it is used in a laboratory under the direct
34 supervision of a technically qualified individual.
 - 35 3) Petroleum, including crude oil or any fraction thereof, which is not
36 otherwise specifically listed or designated as a hazardous substance by
37
38

1 Comprehensive Environmental Response, Compensation and Liability Act
2 (**CERCLA**).

- 3 3. Incident Level I: According to the NFPA 471, Responding to Hazardous Materials
4 Incidents (See Table F-3). If the product(s) involved in the fire, explosion, spill or
5 leakage meets the following criteria, it will be classified as a Level I incident and does
6 not implement the Contingency Plan.
7
8 a. The product does not require a U.S. Department of Transportation (**DOT**) placard,
9 is a NFPA listed 0 or 1 for all categories, or is Other Regulated Materials A, B, C,
10 or D.
11
12 b. The fire is under control and the reactivity rating of the material is less than a
13 rating 2, indicating a low potential for subsequent explosion as the hazardous
14 material can be considered normally stable.
15
16 c. There was no release or the release can be confined with readily available
17 resources.
18
19 d. There is no life-threatening situation.
20
21 e. There is no potential environmental impact.
22
23 4. Incident Level II: According to NFPA 471, Responding to Hazardous Materials
24 Incidents, (See Table F-3). If the product(s) involved in the fire, explosion, spill or
25 leakage meets the following criteria, it will be classified as a Level II incident and the
26 Contingency Plan will be implemented by the RCRA Emergency Coordinator.
27
28 a. The product requires a DOT placard, is an NFPA 2 for any categories, or is
29 Environmental Protection Agency (**EPA**) regulated waste (Site-specific: Table F-1
30 and TRU mixed waste) ~~AND~~
31
32 b. The incident involves multiple packages.
33
34 c. There is potential for the fire to spread since the hazardous material's flammability
35 level (rating 2) is below 200 degrees Fahrenheit, or the reactivity (rating 2)
36 indicates that violent chemical changes are possible and thus may be explosive.
37
38 d. The release may not be controllable without special resources.
39
40 e. The incident requires evacuation of a limited area for life safety.
41
42 f. The potential for environmental impact is limited to soil and air within incident
43 boundaries.
44
45 g. The container is damaged but able to contain the contents to allow handling or
46 transfer of product.
47
48 5. Incident Level III: According to NFPA 471, Responding to Hazardous Materials
49 Incidents. (See Table F-3) If the product(s) involved in the fire, explosion, spill or

1 leakage meet the following criteria, it will be classified as a Level III incident and the
2 Contingency Plan will be implemented by the RCRA Emergency Coordinator.
3

- 4 a. The product is a poison A (gas), an explosive A/B, organic peroxide, flammable
5 solid, material that is dangerous when wet, chlorine, fluorine, anhydrous ammonia,
6 NFPA 3 and 4 for any categories including special hazards, EPA extremely
7 hazardous substances, and cryogenics.
- 8 b. The site-specific container size for this incident level will be a tank truck.
- 9 c. There is potential for the fire to spread since the hazardous material's flammability
10 level (rating 3 or 4) is below 100 degrees Fahrenheit, or the reactivity (rating 3 or
11 4) indicates that the material may explode.
- 12 d. The release may not be controlled even with special resources.
- 13 e. The incident requires mass evacuation of a large area for life safety.
- 14 f. Even though the NFPA guidelines for this incident level indicate that the potential
15 for environmental impact is severe, due to the site engineering controls, the impact
16 is contained within the HWMUs.
- 17 g. The container is damaged to such an extent that catastrophic rupture is possible.

18 The above categories include fire situations, weather conditions, natural phenomena, and
19 explosions which will have to be evaluated to make an incident level determination. A Level II
20 (potential threat to human health in localized area, potential for moderate on-site environmental
21 impact) or Level III (potential threat to human health in a larger area, potential for severe
22 environmental impact) incident by definition is considered to be a potential threat to human
23 health or the environment and, therefore, is considered to be an emergency requiring activation
24 of the Contingency Plan.
25

26 F-4 Emergency Response Method

27 Methods that describe how and when the WIPP Contingency Plan will be implemented cover the
28 following 11 implementation areas:
29

- 30 1. Notification (Section F-4a)
31
- 32 2. Identification of hazardous materials (Section F-4b)
33
- 34 3. Assessment of the nature and extent of the emergency (Section F-4c)
35
- 36 4. Control, containment, and correction of the emergency (Section F-4d)
37
- 38 5. Prevention of recurrence or spread of fires, explosions, or releases (Section F-4e)
39
- 40 6. Management and containment of released material and waste (Section F-4f)
41

1 7. Incompatible waste (Section F-4g)

2
3 8. Post-emergency facility and equipment maintenance and reporting (Section F-4h)

4
5 9. Container spills and leakage (Section F-4i)

6
7 10. Tank spills and leakage (Section F-4j)

8
9 11. Surface impoundment spills and leakage (Section F-4k)

10
11 F-4a Notification

12 Notification requirements in the event of an emergency at a RCRA hazardous waste management
13 facility are defined by 20.4.1.500 NMAC (incorporating 40 CFR §§264.56(a) and (d)).

14 Necessary notifications in case of an emergency at the WIPP facility are described in this section
15 (Figure F-4a). Personnel at the WIPP facility are trained to respond to emergency notifications.

16
17 F-4a(1) Initial Emergency Response and Alerting the RCRA Emergency Coordinator

18 The first person to become aware of an incident shall immediately report the situation to the
19 CMRO, and provide the following information, as appropriate:

- 20
21 • Name and telephone number of the caller
22 • Location of the incident and the caller
23 • Time and type of incident
24 • Severity of the incident
25 • Magnitude of the incident
26 • Cause of the incident
27 • Assistance needed to deal with or control the incident
28 • Areas or personnel affected by the incident

29
30 In addition to receiving incident reports, the CMRO, who is located in the Support Building
31 (Building 451) (Figure F-1), continuously monitors (24 hours a day) the status of mechanical,
32 electrical, and/or radiological conditions at selected points on the site, both above and below
33 ground. Alarms to indicate abnormal conditions are located throughout the WIPP facility. The
34 alarm(s) (e.g., fire, radiation) may be the first notification of an emergency situation received by
35 the CMRO. The CMRO monitors alarms, takes telephone calls and radio messages, and initiates
36 outgoing calls to emergency staff and outside agencies.

37
38 Once the CMRO is notified of a fire, explosion, or a release anywhere in the facility (either by
39 eyewitness or an alarm), the RCRA Emergency Coordinator is immediately notified. Once

1 notified, the RCRA Emergency Coordinator assumes responsibility for the management of
2 activities related to the assessment, abatement, and/or cleanup of the incident.
3

4 A RCRA Emergency Coordinator is on-site at all times and, therefore, can be reached at any
5 time via a two-way radio or over the public address (PA) and plectrons on-site. If the RCRA
6 Emergency Coordinator is unavailable or unable to perform these duties, a qualified alternate
7 RCRA Emergency Coordinator is available.
8

9 The EST/FPT is also notified in case of fire, explosion, or release. The RCRA Emergency
10 Coordinator, as incident commander, determines if supplemental emergency responders are
11 necessary. Notification of the ERT (surface) is made by using the ERT pagers and/or the public
12 announcement system. Notification of the FLIRT is by using the Mine Page Phone System. If
13 the MRT is needed the RCRA Emergency Coordinator will instruct the CMRO to make a PA
14 announcement for the MRT to assemble in the Mine Rescue Room, located in a predetermined
15 location.
16

17 Off-shift personnel may be notified using the on-call list, which is updated weekly by the
18 Permittees. The FSM/CMRO, each individual on the on-call list, and WIPP Security receive
19 copies of the on-call list. The CMRO may direct Security to make the notifications.
20

21 The response to an unplanned event will be performed in accordance with procedures based on
22 the applicable Federal, State, or local regulations and/or guidelines for that response. These
23 include the U.S. Mine Safety and Health Administration (MSHA); NMAC; CERCLA; Chapter
24 74, Article 4B, New Mexico Statutes Annotated 1978, New Mexico Emergency Management
25 Act; and agreements between the Permittees and local authorities (Section F-6) for emergencies
26 throughout the WIPP facility.
27

28 After notification by the CMRO, the EST/FPT shall immediately investigate to determine
29 pertinent information relevant to the actual or potential threat posed to human health or the
30 environment. The information will include the location of release, type, and quantity of spilled
31 or released material (or potential for release due to fire, explosion, weather conditions, or other
32 naturally occurring phenomena), source, areal extent, and date and time of release. The
33 EST/FPT shall provide information for classification of the incident, according to the emergency
34 response guidelines, to the RCRA Emergency Coordinator. The RCRA Emergency Coordinator
35 then classifies the incident after evaluation of all pertinent information. This classification will
36 consider both direct and indirect effects of the release, fire, or explosion (e.g., the effects of any
37 toxic, irritating, or asphyxiating gases that are generated, or the effects of any hazardous surface
38 water run-off from water or chemical agents used to control fire and heat-induced explosions).
39

40 When the RCRA Emergency Coordinator determines that an Incident Level II or III has
41 occurred, the Contingency Plan is implemented. The RCRA Emergency Coordinator then may
42 choose to activate the EOC for additional support (Figure F-4). If the RCRA Emergency
43 Coordinator determines that due to extenuating circumstances the potential to upgrade to an
44 incident Level II or III exists, the RCRA Emergency Coordinator also may activate the EOC.
45 The EOC will assist the RCRA Emergency Coordinator in mitigation of the incident with use of

1 communications equipment and technical expertise from any WIPP organization (see Section
2 F-4c).

3
4 The EOC staff will assess opportunities for coordination and the use of mutual-aid agreements
5 with local outside agencies making additional emergency personnel and equipment available
6 (Section F-6), as well as the use of specialized response teams available through various State
7 and Federal agencies. ~~As a DOE owned facility, the WIPP facility may use the resources~~
8 ~~available from the Federal Response Plan, signed by 27 Federal departments and agencies in~~
9 ~~April 1987, and developed under the authorities of the Earthquake Hazards Reduction Act of~~
10 ~~1977 (42 U.S.C. 7701 et seq.) and amended by the Stafford Disaster Relief Act of 1988.~~ Most
11 resources are available within 24 hours. The WIPP facility maintains its own emergency
12 response capabilities on-site. In addition to the supplemental emergency responders, radiological
13 control technicians, environmental sampling technicians, wildlife biologists, and various other
14 technical experts are available for use on an as-needed basis.

15
16 F-4a(2) Communication of Emergency Conditions to Facility Employees

17 Procedures for notifying facility personnel of emergencies depend upon the type of emergency.
18 Methods of notification are:

19
20 • Local Fire Alarms

21 The local fire alarms sound a bell tone and may be activated automatically or manually in
22 the event of a fire.

23 • Surface Evacuation Signal

24 The evacuation signal is a yelp² tone and is manually activated by the CMRO when
25 needed. The CMRO shall follow the evacuation signal with verbal instructions and
26 ensure the Site Notification System (i.e., the plectron) has been activated.

27 • Underground Evacuation Warning System

28 The evacuation signal is a yelp tone and flashing strobe light. In the event of an
29 evacuation signal, underground personnel will proceed to the nearest egress hoist station
30 (Section F-7b) to be apprised of the nature of the emergency and the evacuation route to
31 take. Underground personnel are trained to report to the underground assembly areas and
32 await further instruction if all power fails or if ventilation stops. If evacuation of
33 underground personnel is required, this will be done using the backup electric generators
34 and in accordance with the applicable requirements of MSHA.

35 • Contingency Evacuation Notification

²The yelp tone increases from 500 to 1,000 hertz and drops to 500 hertz.

1 If the primary warning system consisting of alarms and signals fails to operate when
2 activated (as in a total power outage and failure of the back-up power systems), WIPP
3 Security will be notified by the CMRO to initiate the contingency evacuation plan. In
4 this event Security officers will alert personnel to evacuate the area and will check
5 trailers, if possible, to ensure that personnel have been alerted/evacuated.

6 WIPP facility personnel are trained and given instruction during General Employee Training to
7 recognize the various alarm signals and the significance of each alarm. WIPP facility employees
8 and site visitors are required to comply with directions from emergency personnel and alarm
9 system notifications and to follow instructions concerning emergency equipment, shutdown
10 procedures, and emergency evacuation routes and exits.

11
12 F-4a(3) Notification of Local, State, and Federal Authorities

13 If it is determined that the facility has had a fire, an explosion, a spill, or a release of hazardous
14 waste or hazardous waste constituents (included in 20.4.1.200 NMAC (incorporating 40 CFR §
15 261)) in the miscellaneous unit or TRU mixed waste handling areas, or an emergency resulting in
16 a release of a hazardous substance (included in 40 CFR §302.4 and §302.6 or the New Mexico
17 Emergency Management Act, §74-4B-3 and §74-4B-5) that could threaten human health or the
18 environment outside the facility, the RCRA Emergency Coordinator, after consultation with the
19 DOE as the owner of the facility, will assure that local authorities are notified by telephone
20 and/or radio, including:

- 21
22 • Carlsbad Police Department (telephone number: ~~{505}~~(575) 885-2111) (or 911)
23 • Carlsbad Fire Department (telephone number: ~~{505}~~(575) 885-2111) (or 911)
24 • Eddy County Sheriff (telephone number: ~~{505}~~(575) 887-7551)
25 • Hobbs Fire Department (telephone number: ~~{505}~~(575) 397-9265)

26 After local authorities are notified, the RCRA Emergency Coordinator will ensure notification of
27 the following:

- 28
29 • New Mexico Environment Department (**NMED**)
30 Department of Public Safety
31 24-Hour Emergency Reporting Telephone Number: (505) 827-9329
32 FAX number: (505) 827-9368
33 • Department of Public Safety WIPP Coordinator
34 Telephone Number: (505) 827-9221
35 FAX number: (505) 829-3434
36 • Hazardous Materials Emergency Response, Chemical Safety Office, Department
37 of Public Safety, State Emergency Response Commission

1 Telephone number: (505) 476-9681
2 FAX number: (505) 476-9695

3 • National Response Center
4 Telephone number: 1-800-424-8802
5 FAX number: (202) 479-7181

6 • Local Emergency Planning Committee
7 Telephone number: ~~(505)~~(575) 885-3581
8 Fax number: ~~(505)~~(575) 628-3973

9 The first notification of public safety and regulatory agencies will include the following:
10

- 11 • The name and address of the facility and the name and phone number of the reporter
- 12 • The type of incident (fire, explosion, or release)
- 13 • The date and time of the incident
- 14 • The type and quantity of material(s) involved, to the extent known
- 15 • The exact location of the incident
- 16 • The source of the incident
- 17 • The extent of injuries, if any
- 18 • Possible hazards to human health and the environment (air, soil, water, wildlife, etc.)
19 outside the facility
- 20 • The name, address, and telephone number of the party in charge of or responsible for the
21 facility or activity associated with the incident
- 22 • The name and the phone number of the RCRA Emergency Coordinator
- 23 • The identity of any surface and/or groundwater involved or threatened and the extent of
24 actual and potential water pollution
- 25 • The steps being taken or proposed to contain and clean up the material involved in the
26 incident

27 The RCRA Emergency Coordinator will also be available to advise the appropriate local, State,
28 or Federal officials on whether or not local areas should be evacuated.
29

1 F-4a(4) Notification of the General Public

2 Immediate notification of the general public through the public safety and emergency agencies
3 listed above will be made by, or under the direction of, the RCRA Emergency Coordinator
4 following an evaluation to determine if local adjacent areas need to be evacuated. This
5 evaluation will be made in consultation with the DOE who, as the owner of the facility, has
6 management responsibility for the land withdrawal area. DOE policy is to provide accurate and
7 timely information to the public by the most expeditious means possible concerning emergency
8 situations at the WIPP site that may affect off-site personnel, public health and safety, and/or the
9 environment. A DOE Carlsbad Field Office (**DOE/CBFO**) Management representative is
10 always on-call. This person is available by pager or telephone 24 hours a day.

11
12 A Hazards Assessment was conducted, which indicated no need for protective actions or
13 emergency action levels, as defined by the Permittees, for the facility. Therefore, no procedures
14 are in place for evacuation of the public. Procedures are in place for notification of the public by
15 radio, television, and newspapers for news items which might include notification of on-site
16 emergency situations. These procedures include a Public Affairs Coordinator in the EOC who
17 writes and transmits press releases to the DOE/CBFO office, where formal press conferences are
18 conducted.

19
20 F-4b Identification of Hazardous Materials

21 The identification of hazardous wastes, hazardous waste constituents, or hazardous materials
22 involved in a fire, an explosion, or a release to the environment is a necessary part of the
23 assessment of an incident, as described in 20.4.1.500 NMAC (incorporating 40 CFR §264.56(b)).
24 RCRA hazardous waste and hazardous substances and materials listed in 40 CFR §302.4 and
25 §302.6 or New Mexico Emergency Management Act, §74-4B-3 and §74-4B-5 and, involved in
26 any release at the WIPP facility will be identified. The identification of likely hazardous
27 materials at any location is enhanced because hazardous materials and hazardous waste are only
28 stored or managed in specified locations throughout the WIPP facility. An attempt will be made
29 to identify products involved by occupancy/location, container shape, markings/color,
30 placards/labels, United Nations/North America/Product Identification Number, on-site technical
31 experts, or field sampling. Further, the ES&H department maintains an updated inventory of
32 hazardous materials/substances that are brought on site, and a master MSDS listing in the Safety
33 and Emergency Services Facility, Building 452.

34
35 Sources of information available to identify the hazardous wastes, substances, or materials
36 involved in a fire, an explosion, or a release at the WIPP facility include operator/supervisor
37 knowledge of their work areas, materials used, and work activities underway; the WIPP Waste
38 Information System (**WWIS**), which identifies the location within the facility of emplaced TRU
39 mixed waste, including emplaced derived waste; and waste manifests and other waste
40 characterization information in the operating record. The WWIS also includes information on
41 wastes that are in the waste handling process. Also available are MSDSs for hazardous material
42 in the various user areas throughout the facility, waste acceptance records, and materials
43 inventories for buildings and operating groups at the WIPP facility. Information or data from the

1 derived waste accumulation areas, the hazardous waste staging area, satellite staging areas, and
2 nonregulated waste accumulation areas are included.

3
4 TRU mixed waste received by the WIPP facility during the Disposal Phase will be characterized
5 for hazardous constituents prior to receipt, and acceptable knowledge will be used to characterize
6 derived waste prior to emplacement.

7
8 Information required for identifying TRU mixed hazardous constituents in case of an incident is
9 readily available through the WWIS and the waste acceptance records. Waste accepted at WIPP
10 is already known to be compatible with all materials used to respond to an emergency. All non-
11 TRU mixed waste materials received on site, other than those listed in Table F-1, are in such
12 small quantities that no reaction could develop which would trigger an Incident Level II or III
13 response.

14
15 The RCRA Emergency Coordinator will have access to the WWIS through Operations, or
16 through the Facility Shift Manager's Office.

17
18 The RCRA Emergency Coordinator has access to the inventory lists and MSDSs in the Safety
19 and Emergency Services Facility at all times.

20
21 F-4c Assessment of the Nature and Extent of the Emergency

22 Once the required notifications have been made, the RCRA Emergency Coordinator will ensure
23 that the identity, exact source, amount, and areal extent of any released materials are determined,
24 as required under 20.4.1.500 NMAC (incorporating 40 CFR §264.56(b)). The RCRA
25 Emergency Coordinator will determine whether the occurrence constitutes an emergency based
26 on knowledge of the area and access to the waste identification/characterization information
27 described in Section F-4b. An emergency will require response by only trained emergency
28 response personnel. The RCRA Emergency Coordinator will be responsible for responding to
29 immediate and potential hazards, using the services of trained personnel to determine: 1) the
30 identity of hazardous wastes, hazardous waste constituents, and other hazardous materials
31 involved in a release, as described in Section F-4b; 2) whether or not a release involved a
32 reportable quantity of a hazardous substance; 3) the areal extent of a release; 4) the exact source
33 of a release; and 5) the potential hazards to human health or to the environment.

34
35 After the materials involved in an emergency are identified, the specific information on the
36 associated hazards, appropriate personal protective equipment (**PPE**), decontamination, etc., will
37 be obtained from MSDSs and from appropriate chemical reference materials at the same
38 location. These information sources may be accessed by the RCRA Emergency Coordinator or
39 through several WIPP facility organizations.

40
41 The emergency assessment requires determination of hazards involving evaluation of several
42 criteria, including:

- 1 • Exposure: magnitude of actual or potential exposure to employees, the general public,
2 and the environment; duration of human and environmental exposure; pathways of
3 exposure
- 4 • Toxicity: types of adverse health or environmental effects associated with exposures; the
5 relationship between the magnitude of exposure and adverse effects
- 6 • Reactivity: hazardous materials or hazardous wastes, which are not TRU mixed wastes,
7 involved in an incident will be assessed for reactivity through accessing the MSDSs for
8 the affected material and the recommended method(s) for managing such waste
- 9 • Uncertainties: considerations for undeterminable or future exposures; uncertain or
10 unknown health effects, including future health effects

11 F-4d Control, Containment, and Correction of the Emergency

12 The WIPP facility is required to control an emergency and to minimize the potential for the
13 occurrence, recurrence, or spread of releases due to the emergency situation, as described in
14 20.4.1.500 NMAC (incorporating 40 CFR §264.56 (e)). The WIPP Emergency Response
15 procedures utilize the incident mitigation guidelines in NFPA 471, Responding to Hazardous
16 Materials Incidents, with initial response priority being on control, and those actions necessary to
17 ensure confinement and containment (the first line of defense) in the early, critical stages of a
18 spill or leak. The RCRA Emergency Coordinator is responsible for stopping processes and
19 operations when necessary, and removing or isolating containers. Transuranic TRU mixed waste
20 will remain within the WHB Unit, the Parking Area Unit, and the underground HWDU.
21

22 F-4d(1) All Emergencies

23 The WIPP Emergency Response procedures include, but are not limited to, the following actions
24 appropriate for control:
25

- 26 1. Isolate the area from unauthorized person by fences, barricades, warning signs, or
27 other security and site control precautions. Isolation and evacuation distances vary,
28 depending upon the chemical/product, fire, and weather situations.
- 29 2. Identify the chemical/product according to Section F-4b.
- 30 3. Drainage controls.
- 31 4. Stabilization of physical controls (such as dikes or impoundment[s]).
- 32 5. Capping of contaminated soils to reduce migration.
- 33 6. Using chemicals and other materials to retard the spread of the release or to mitigate
34 its effects.
- 35 7. Excavation, consolidation, removal, or disposal of contaminated soils.
- 36 8. Removal of drums, barrels, or tanks where it will reduce exposure risk during
37 situations such as fires.

1 If the facility stops operations in response to a fire, explosion, or release, the RCRA Emergency
2 Coordinator shall ensure continued monitoring for leaks, pressure buildup, gas generation, or
3 ruptures in valves, pipes, or other equipment, wherever appropriate. If operations continue,
4 personnel normally assigned to these tasks will continue.
5

6 Both natural and synthetic methods will be employed to limit the releases of hazardous materials
7 so that effective recovery and treatment can be accomplished with minimum additional risk to
8 human health or the environment. A combination of the above methods to achieve protection of
9 human health and the environment, with emphasis on two basic methods for mitigation of
10 hazardous materials incidents - Physical and Chemical (Tables F-4, F-5) mitigation, will be used.
11

- 12 1. Physical methods of control involve any of several processes to reduce the area of the
13 spill/leak, or other release mechanism (such as fire suppression).
14
 - 15 A. Absorption is the process in which materials hold liquids through the process of
16 wetting. Absorption is accompanied by an increase in the volume of the
17 sorbate/sorbent system through the process of swelling. Some of the materials
18 utilized in response to Level I incidents or Level II incidents involving liquids will
19 be absorbent sheets of polyolefin-type fibers, spill control bucket materials
20 (specifically for solvents, neutralization, or for acids/caustics), and absorbent socks
21 for general liquids or oils.
22
 - 23 B. Covering refers to a temporary form of mitigation for radioactive incidents that
24 will be utilized in response to Level II or Level III incidents involving CH TRU
25 mixed waste. These could include absorbent sheets, plastic, or actual ambulance
26 blankets.
27
 - 28 C. Dikes or Diversion refer to the use of physical barriers to prevent or reduce the
29 quantity of liquid flowing into the environment. Dikes may be soil or other
30 barriers temporarily utilized to hold back the spill or leak. Diversion refers to the
31 methods used to physically change the direction of the flow of the liquid.
32 Absorbent socks or earth may be utilized as dikes or diversions for all levels of
33 incidents.
34
 - 35 D. Overpacking is accomplished by the use of an oversized container. Overpack
36 containers will be compatible with the hazards of the materials involved.
37
 - 38 E. Plug and Patch refers to the use of compatible plugs and patches to reduce or
39 temporarily stop the flow of materials from small holes, rips, tears, or gashes in
40 containers. A Series "A" hazardous response kit containing nonsparking
41 equipment to control and plug leaks may be utilized for response to all levels of
42 incidents.
43
 - 44 F. Transfer refers to the process of moving a liquid, gas, or some forms of solids,
45 either manually or by pump, from a leaking or damaged container. Scoops,

1 shovels, jugs, and pails as well as drum transfer pumps for chemical and petroleum
2 transfer are utilized as needed in response to all levels of incidents.
3

- 4 G. Vapor Suppression refers to the reduction or elimination of vapors emanating from
5 a spilled or released material through the most efficient method or application of
6 specially designed agents such as an aqueous foam blanket.
7

8 2. Chemical Methods of Mitigation
9

- 10 A. Neutralization is the process of applying acids or bases to a spill to form a neutral
11 salt. The application of solids for neutralizing can often result in confinement of
12 the spilled material. This would include using the neutralizing adsorbents.
13

- 14 B. Solidification is the process whereby a hazardous liquid is added to material such
15 as an absorbent so that a solid material results.
16

17 The established procedures are based upon the incident level and a graded approach for
18 nonradioactive or CH TRU waste emergencies and initiated to:
19

- 20 1. Minimize contamination or contact (through PPE, etc.)
21 2. Limit migration of contaminants
22 3. Properly dispose of contaminated materials
23

24 For RH TRU mixed waste, the detection of contamination on or damage to a RH TRU mixed
25 waste canister or a facility canister may occur outside the Hot Cell during cask to cask transfer of
26 the canister or during loading of the Shielded Insert in the Transfer Cell. When such
27 contamination or damage is found, the Permittees have the option to decontaminate or return the
28 canister to the generator/storage site or another site for remediation. In the case of a damaged
29 facility canister, the Shielded Insert may be used as an overpack to facilitate further management.
30 Contamination may also be detected within the Hot Cell during the unloading of the CNS 10-
31 160B shipping cask. In this case, the Permittees may decontaminate the 55-gallon drums or
32 return them to the generator/storage site or another site for remediation. Spills or releases that
33 occur within the RH Complex or the underground as the result of RH TRU mixed waste handling
34 will be mitigated by using appropriate measures which may include the items above.
35

36 F-4d(2) Fire

37 The incident level emergency response identified in Section F-3 includes fire/explosion potential.
38 WIPP fire response includes incipient, exterior structure fires, and internal structure fires. The
39 RCRA Emergency Coordinator can implement the Memoranda of Understanding (**MOU**) for
40 additional support.
41

42 The first option in mine fire response will be to apply mechanical methods to stop fires (e.g., cut
43 electrical power). The last option in mine fire response will be to reconfigure ventilation using
44 control doors associated with the underground ventilation system. The following actions are
45 implemented in the event of a fire:

- 1
- 2 1. All emergency response personnel at an incident will wear appropriate PPE.
- 3 2. Only fire extinguishing materials that are compatible with the materials involved in
- 4 the fire will be used to extinguish fires. Compatibility with materials involved in a fire
- 5 are determined by pre-fire plans, DOT Emergency Response Guide Book (~~DOT~~,
- 6 1993), DOT labeling, and site-specific knowledge of the emergency response
- 7 personnel. Water and dry chemical materials have been determined to be compatible
- 8 with all components of the TRU mixed waste. Pre-fire plans for the WHB are
- 9 included in Figures F-10 and F-11.

10 Fires in areas of the WHB Unit should not propagate, due to limited amount of
11 combustibles, and the concrete and steel construction of the structures. Administrative
12 controls, such as landlord inspections and EST/FPT inspections, help to insure good
13 housekeeping is maintained. Combustible material and TRU mixed waste will be
14 isolated, if possible. Firewater drain trenches collect the water and channel it into a
15 sump. In areas not adjacent to the trenches, portable absorbent dikes (pigs) will be
16 used to retain as much as possible, until it can be transferred to containers or sampled
17 and analyzed for hazardous constituents.

- 18
- 19 3. If the fire spreads or increases in intensity, personnel will be directed to evacuate.
- 20
- 21 4. The RCRA Emergency Coordinator will remain in contact with responding personnel
- 22 to advise them of the known hazards.
- 23
- 24 5. In order to ensure that storm drains and/or sewers do not receive potentially hazardous
- 25 runoff, dikes will be built around storm drains to control discharge as needed.
- 26 Collected waste will be sampled and analyzed for hazardous constituents, before being
- 27 discharged to evaporation ponds. There are two ponds south of the security fence,
- 28 opposite the WHB Unit, that will collect drainage from the parking area. The rest of
- 29 the site, inside the security fence, drains to the large pond to the west. Samples will be
- 30 taken from these ponds, after the emergency has been abated, to determine any
- 31 cleanup requirements. NMED will approve any procedures associated with the
- 32 sampling and analysis of the ponds.
- 33
- 34 6. The RCRA Emergency Coordinator maintains overall control of the emergency and
- 35 may accept and evaluate the advice of WIPP facility personnel and emergency
- 36 response organization members, but retains overall responsibility.
- 37
- 38 7. The RCRA Emergency Coordinator will be in overall control of WIPP facility
- 39 emergency response efforts until the emergency is terminated.
- 40
- 41 8. Materials involved in a fire can be identified in the following ways:
- 42
 - 43 • According to Section F-4b.

- 1 • If the contents of the waste container cannot be determined based on its location
2 and the label is destroyed by fire, the material will be treated as an unknown,
3 evaluated for radiological contamination, and analyzed according to methods in
4 the EPA's "Test Methods for Evaluating Solid Waste Physical/Chemical
5 Methods" (**SW-846**), Third Edition, after the fire has been extinguished.

- 6 • Airborne radioactivity samples may be obtained during a fire involving
7 radioactive materials, using portable and fixed air samplers. Response personnel
8 will be adequately protected from airborne radioactivity by their PPE required for
9 fire response.

10 9. Only materials compatible with the waste may be used for fire response.

11
12 10. When cleanup has proceeded to the point of finding no radionuclide activity, then the
13 "swipe" can be sent for analysis for hazardous constituents. The use of these
14 confirmation analyses is as follows:

- 15 • For waste containers, once radiologically clean and free of any visible evidence of
16 hazardous waste spills on the container, it will be placed in the underground
17 without further action.

- 18 • For area contamination, once the area is cleaned up and is shown to be
19 radiologically clean, it will be sampled for the presence of hazardous waste
20 residues (for further information see Section F-4d, Emergency Termination
21 Procedures).

- 22 • For area contamination, once the area is cleaned up and is shown to be
23 radiologically clean, it will be sampled for the presence of hazardous waste
24 residues (for further information see Section F-4d, Emergency Termination
25 Procedures).

26 11. Fire suppression materials used in response to incidents will be retained on-scene,
27 where an evaluation will be performed to determine appropriate recovery and disposal
28 methods.

29 F-4d(3) Explosion

30 The following actions will be implemented in the event that an explosion that involves or
31 threatens hazardous or TRU mixed waste or hazardous materials has occurred:

- 32 1. The area will be evacuated immediately.

- 33 2. The CMRO will immediately notify the appropriate emergency response personnel
34 and the RCRA Emergency Coordinator about the explosion.

- 35 3. Injured personnel will be treated and transported as necessary.

- 36 4. The RCRA Emergency Coordinator will remain in contact with responding personnel
37 to advise them of the known hazards involved and the degree and location of the
38 explosion and associated fires.

- 39 5. Fire suppression materials used in response to incidents will be retained on-scene,
40 where an evaluation will be performed to determine appropriate recovery and disposal
41 methods.

- 1 5. The RCRA Emergency Coordinator will be in command and may accept and evaluate
2 the advice of WIPP facility personnel and emergency response organization members,
3 but retains the overall responsibility. Selections of methods and tactics of response are
4 the responsibility of the Incident Commander.
5
- 6 6. The RCRA Emergency Coordinator will be in overall control of WIPP facility
7 emergency response efforts until the emergency is terminated.
8
- 9 7. When cleanup has proceeded to the point of finding no radionuclide activity, then
10 samples may be taken for chemical analysis if there is visible evidence to suspect
11 additional hazardous waste residues. Chemical residues on floor surfaces resulting
12 from a hazardous waste explosion will be evaluated, sampled, analyzed (if required),
13 isolated, and returned to appropriate containers, and surfaces will be cleaned using
14 appropriate cleaners.
15
- 16 8. The RCRA Emergency Coordinator may shut down operational units (e.g., process
17 equipment and ventilation equipment) that have been affected directly or indirectly by
18 the explosion. Once the areas have been determined safe for reentry, processes may
19 be reactivated.
20

21 F-4d(4) Spills

22 Protection of response personnel at a hazardous material incident is paramount. The primary
23 methods to protect personnel are time, distance, and shielding. If a Level II or III incident exists,
24 the RCRA Emergency Coordinator will implement the following actions:
25

- 26 1. The immediate area will be evacuated.
27
- 28 2. The RCRA Emergency Coordinator will review facility records to determine the
29 identity and chemical nature of released material.
30
- 31 3. Entry team procedures will be utilized, with special attention to the following:
32
 - 33 • Buddy system
 - 34 • Appropriate PPE
 - 35 • Backup rescue team
 - 36 • Supplemental communication signals (hand signals and hand-light signals)
 - 37 • Monitoring equipment
 - 38 • Exposure time limitations
- 39 4. If possible, the source of the release will be secured.
40
- 41 5. A dike to contain runoff may be built.

- 1
- 2 6. Emergency responders will ensure that storm drains and/or sewers do not receive
- 3 potentially hazardous runoff or spilled material. They may build dikes around storm
- 4 drains to control discharge.
- 5
- 6 7. Released wastes may be collected and contained by stabilizing or neutralizing the
- 7 spilled material, as appropriate, pouring an absorbent over the spilled material, and
- 8 sweeping or shoveling the absorbed material into drums or other appropriate
- 9 containers. The absorbents have been determined to be compatible with all
- 10 components of the TRU mixed waste.
- 11
- 12 8. No TRU mixed waste that may be incompatible with the released material will be
- 13 managed in the affected area until cleanup procedures are complete.
- 14
- 15 9. The RCRA Emergency Coordinator will direct spill control, decontamination, and
- 16 termination procedures described below.
- 17

18 F-4d(5) Decontamination of Personnel

19 Decontamination of personnel with radioactive contamination is the responsibility of the
20 Radiological Control (**RC**) section. If a person is contaminated with radioactivity during a site
21 evacuation to the staging areas, the contaminated area will be covered before the person can be
22 moved (under escort by RC personnel) to the staging area. The RC personnel will ensure the
23 contaminated person remains segregated from other site personnel while under RC supervision.

24
25 In the event of an emergency that requires immediate evacuation of the area, the contamination
26 can be covered by any method warranted, given the circumstance (e.g., clean clothing wrapped
27 around the area). If the size of the radioactive contamination on the body is small and localized,
28 it can be covered with clothing (e.g., glove, shoe cover, coveralls). If the size of the radioactive
29 contamination on the body is large, it may be covered by dressing the individual in a full set of
30 Anti-Contamination clothing (coveralls, hood, gloves, shoe covers, etc.).

31
32 If time and location permit and the contamination is on the face, it will be decontaminated
33 immediately using a cloth moistened with tepid water (and a mild detergent, if necessary). If the
34 size of the radioactive contamination on the individual's body is small and localized, it will be
35 decontaminated using the same method as for the face, but after the individual has been
36 transferred to an area appropriate for conducting decontamination.

37
38 If the individual is transferred to the staging area prior to decontamination, he/she will be
39 decontaminated at the staging area using site procedures for personnel decontamination and
40 using decontamination supplies and equipment as appropriate for the extent and magnitude of the
41 contamination.

42

1 F-4d(6) Control of Spills or Leaking or Punctured Containers of CH and RH TRU Mixed Waste

2 In the event of spills or leaking or punctured containers of CH and RH TRU mixed waste, the
3 WIPP responds to three distinct phases: 1) the event, 2) the re-entry, and 3) the recovery.

4
5 During the event, the following immediate actions are completed: 1) stop work, 2) warn others
6 (notify CMR), 3) isolate the area, 4) minimize exposure, and 5) close off unfiltered ventilation.
7 These actions can take place simultaneously, as long as they are completed before proceeding to
8 the re-entry phase.

9
10 CH TRU Mixed Waste

11
12 Prior to the re-entry following an event involving containers of CH TRU mixed waste, a
13 Radiological Work Permit (**RWP**) is written for personnel to enter with protective clothing to
14 assess the conditions, take surveys and samples, and mitigate problems that could compound the
15 hazards in the area (cover up spilled material with plastic material sheeting and or any approved
16 fixatives such as polyvinyl alcohol (**PVA**) or paint, place equipment in a safe configuration, etc.).
17 During the re-entry phase, smears and air sample filters are taken and counted. This information
18 is used by cognizant managers, RC personnel, and As Low As Reasonably Achievable
19 (**ALARA**) Committee representatives to determine an appropriate course of action to recover the
20 area. A plan to decontaminate and recover affected areas and equipment will be approved with a
21 separate RWP written to establish the radiological controls required for the recovery.

22
23 During the recovery phase, the plan will be executed to utilize the necessary resources to conduct
24 decontamination and/or overpacking operations as needed. The completion of this phase will
25 occur prior to returning the affected area and/or equipment to normal activities. The recovery
26 phase will include activities to minimize the spread of contamination to other areas. These
27 activities will involve placing the waste material in another container; vacuuming the waste
28 material; overpacking or plugging/patching the spilled, leaking, or punctured waste container;
29 and/or decontaminating the affected area(s). If an affected surface cannot be decontaminated to
30 releasable levels, it may be covered with a fixative coating and established as a Fixed
31 Contamination Area to prevent spread of contamination, or it may be removed using heavy
32 machinery and tools, packaged in approved waste containers, and emplaced in the underground.
33 Every reasonable effort to minimize the amount of derived waste, while providing for the health
34 and safety of personnel, will be made.

35
36 Should a breach of a CH TRU mixed waste container occur at the WIPP that results in
37 removable contamination exceeding the small area "spot" decontamination levels, the affected
38 container(s) (e.g., breached and contaminated) will be placed into an available overpack
39 container (e.g., 85-gal drum, SWB, TDOP), except that TDOP's will be decontaminated,
40 repaired/patched in accordance with 49 CFR §173 and §178 (e.g., 49 CFR §173.28), or returned
41 to the generator. The decontamination of equipment and the overpacking of
42 contaminated/damaged waste containers will be performed in the vicinity of the incident. For
43 example, under normal operations CH TRU mixed waste will be handled only in the areas of the
44 WHB Unit. Therefore, it is within these same areas that decontamination and/or overpacking

1 operations would occur. By eliminating the transport of contaminated equipment to other areas
2 for decontamination or overpacking, the risk of spreading contamination is reduced.

3
4 Equipment used during a spill cleanup or CH TRU mixed waste overpacking operation could
5 include: cloths, brushes, scoops, absorbents, squeegees, tape, bags, pails, slings, hand tools, and
6 others as needed for a given incident.

7
8 At the underground emplacement room, salt contaminated by a spill of CH TRU mixed waste
9 would be either covered or cleaned up, depending on location, extent, and spilled material, due to
10 potential radioactive contamination spread via the salt dust. The contaminated salt would be
11 covered to isolate it from the workers, and the stacking of waste containers would resume or
12 would be removed and packaged as site-derived waste using applicable site procedures for
13 decontaminating surfaces.

14
15 The decontamination methods will initially involve wiping down structures, equipment, and
16 other containers in the area with absorbent cloths moistened with tepid water. Surveys of these
17 structures will take place and the need to continue decontamination activities will be established.
18 If further decontamination is required, nonhazardous decontaminating agents, such as Liquinox[®],
19 Simple Green[®], Windex[®], citric acid, Bartlett Strip Coat[®], and high pressure CO₂ will be used to
20 prevent generating CH TRU mixed waste.

21
22 **RWPs** **Radiological Work Permits** and other administrative controls provide protective measures
23 to help ensure that new hazardous constituents will not be added during decontamination
24 activities.

25
26 Certain structures and/or equipment may be disassembled to facilitate decontamination or may
27 be placed directly into a derived waste container. Items used in the spill cleanup and
28 decontamination operations (e.g., swipes, tools, PPE, etc.) may also be placed into a derived
29 waste container.

30
31 When decontamination is deemed by the recovery team to be complete, RC personnel will
32 conduct one final, intensive radcon survey of the area and components in the area to release it for
33 uncontrolled use. The free release criteria for items, equipment, and areas is < 20 dpm/100 cm²
34 for alpha radioactivity and < 200 dpm/100 cm² for beta-gamma radioactivity. Personnel will
35 then perform hazardous material sampling after decontamination efforts are complete to verify
36 the removal of hazardous waste substances. After cleanup is complete, facility personnel will
37 complete an inspection and include the details of the spill and cleanup in the log.

38 39 RH TRU Mixed Waste

40
41 For RH TRU mixed waste, the detection of contamination on or damage to a RH TRU mixed
42 waste canister or a facility canister may occur outside the Hot Cell during cask to cask transfer of
43 the canister or during loading of the Shielded Insert in the Transfer Cell. When such
44 contamination or damage is found, the Permittees have the option to decontaminate or return the
45 canister to the generator/storage site or another site for remediation. In the case of a damaged

1 facility canister, the Shielded Insert may be used as an overpack to facilitate further management.
2 Contamination may also be detected within the Hot Cell during the unloading of the CNS
3 10-160B shipping cask. In this case, the Permittees may decontaminate the 55-gallon drums or
4 return them to the generator/storage site or another site for remediation. Spills or releases that
5 occur within the RH Complex or the underground as the result of RH TRU mixed waste handling
6 will be mitigated by using the following measures, as appropriate:

- 7
8 • During the re-entry phase, an evaluation of the incident, including the nature of the
9 release, amount, location, and other appropriate factors, will be performed. An RWP
10 will be written and approved prior to personnel entering the Hot Cell with the
11 appropriate PPE to further assess the situation, perform surveys and take samples, and,
12 if possible, mitigate problems that could compound the hazards in the area. Based on
13 the results of the evaluation, a determination will be made by the RCRA Emergency
14 Coordinator, with input from the cognizant managers, radiological control personnel,
15 and ALARA Committee representatives whether to implement the Contingency Plan
16 and to determine the appropriate course of action to recover from the event. An action
17 response plan to decontaminate and recover affected areas and equipment, together
18 with an RWP establishing the radiological controls required for the recovery will be
19 developed and approved.
20
- 21 • Should a breach of an RH TRU mixed waste container occur in the Hot Cell that results
22 in removable contamination exceeding the small area "spot" decontamination levels,
23 the affected container(s) (e.g., breached and contaminated) will be placed into a canister
24 and processed for disposal. The decontamination of equipment, cleanup of spilled
25 material and the overpacking of contaminated/damaged waste containers will be
26 performed in the vicinity of the incident. For example, under normal operations RH
27 TRU mixed waste in 55-gallon drums will be handled only in the Hot Cell. Therefore,
28 it is within this area that decontamination and/or overpacking operations would occur.
29 By eliminating the transport of contaminated equipment to other areas for
30 decontamination or overpacking, the risk of spreading contamination is reduced.
31 Contaminated materials for the cleanup and overpacking of a breached RH TRU mixed
32 waste container may be managed as CH TRU mixed waste, depending on the surface
33 dose rate.

34
35 Equipment used during a spill cleanup or RH TRU mixed waste overpacking operation
36 could include: cloths, brushes, scoops, absorbents, squeegees, tape, bags, pails, slings,
37 hand tools, and other equipment as needed for a given incident.

- 38
39 • The decontamination methods may initially involve wiping down structures,
40 equipment, and other containers in the area with absorbent cloths moistened with tepid
41 water. Surveys of these structures will take place and the need to continue
42 decontamination activities will be established. If further decontamination is required,
43 nonhazardous decontaminating agents, such as Liquinox[®], Simple Green[®], Windex[®],
44 citric acid, Bartlett Strip Coat[®], and high pressure CO₂ will be used to prevent
45 generating CH TRU mixed waste.

1
2 ~~RWPs~~ Radiological Work Permits and other administrative controls provide protective
3 measures to help ensure that new hazardous constituents will not be added during
4 decontamination activities.

- 5
6 • Certain structures and/or equipment within the Hot Cell may be disassembled to
7 facilitate decontamination or may be placed directly into a derived waste container.
8 Items used in the spill cleanup and decontamination operations (e.g., swipes, tools,
9 PPE, etc.) may also be placed into a derived waste container.

10
11 When decontamination of the Hot Cell is deemed by the recovery team to be complete, RC
12 personnel will conduct one final, intensive radcon survey of the area and components in the area
13 to release it for continued use. The free release criteria for items and equipment that will be
14 released for uncontrolled use are < 20 dpm/100 cm² for alpha radioactivity and < 200 dpm/100
15 cm² for beta-gamma radioactivity. Personnel will then perform hazardous material sampling
16 after decontamination efforts are complete to confirm the removal of hazardous waste
17 substances. After cleanup is complete, facility personnel will complete an inspection and include
18 the details of the spill and cleanup in the log. The recovery phase must be completed before the
19 affected area and/or equipment are returned to service.

20
21 F-4d(7) Natural Emergencies

22 After a natural emergency (earthquake, flood, lightning strike, etc.) that involves hazardous
23 waste or hazardous materials, the FSM will ensure the following actions are taken:

- 24
25 1. Inspect containers which have not been disposed and containment for signs of leakage
26 or damage. Inspect areas where containers are stored looking for leaking containers
27 and for deterioration of containers and the containment system.
28
29 2. Inspect affected equipment or areas associated with hazardous waste management
30 activities for proper operating mode in accordance with site procedures and manually
31 check to ensure automatic and alarmed features on the units are working.
32
33 3. Inspect affected equipment or areas within the HWMUs in accordance with site
34 procedures for damage.
35
36 4. Inspect electrical boards and overhead electrical lines for damage.
37
38 5. Check container areas for signs of leakage or damage to drums and containers.
39
40 6. Check affected buildings and fencing directly related to hazardous waste management
41 activities for damage.
42
43 7. Conduct a general survey of the site looking for signs of land movement, etc.
44

1 8. Take any necessary corrective measures, however temporary, to rectify potential or
2 real problems.

3
4 9. Record inspection results.

5
6 F-4d(8) Roof Fall

7 Roof fall is not expected to affect RH TRU mixed waste because it is emplaced in the rib of the
8 disposal room and not subject to impact from a roof fall. The following incident description and
9 mitigation apply to CH TRU mixed waste.

10
11 The WIPP underground is routinely evaluated for stability and safety of the underground
12 openings. These evaluations can be as simple as the MSHA required visual checks by personnel
13 working in the area or as extensive as the expert review of the roof support system for Room 1
14 Panel 1 conducted in 1991. An in-depth evaluation of all of the accessible underground is
15 performed on an annual basis as part of the formal ground control operating plans. Weekly
16 visual and sounding inspections are performed by the Permittees. More frequent inspections and
17 evaluations are performed in areas where roof or ribs are in need of evaluations, based on visual
18 observations, analysis of rock deformation data, excavation effects program data acquired from
19 observation holes, and support system performance.

20
21 This process applies not only to the waste disposal rooms but to the entire WIPP underground.
22 Prior to waste emplacement, stability of each room will be evaluated. This evaluation will
23 concentrate on the age and current performance of the installed support systems (if any) and the
24 rate of roof beam expansion based on data from installed instrumentation. The roof support
25 system's performance and surety, to provide the support necessary for the required time will be
26 addressed. Criteria used will include design parameters such as the amount of load, the
27 deformation of the installed system, and the number and type of component failures observed, if
28 any. Geotechnical criteria will include parameters such as the type and quantity of fracturing,
29 roof beam expansion rates, and future ground performance based on a predictive model.

30
31 Should the evaluation results indicate that remedial actions are necessary prior to placement of
32 waste, experiences at the WIPP indicate that rebolting or installing supplemental support can
33 extend the safe life of a room for several years.

34
35 After waste emplacement commences, geomechanical monitoring will continue with monitors
36 that are tied into a computer network program. The readings obtained will provide information
37 needed for the roof beam stability assessment. Visual observations of the ground and the support
38 systems will also continue in all accessible areas. Based on the experiences from the Site and
39 Preliminary Design Validation test rooms, it has been proven that any developing instability will
40 be detected through monitoring. Multiple measures to deal with the observed conditions can be
41 implemented months before an event to mitigate any risk associated with a roof fall in the
42 storage room or any affected area within the mine. At a minimum, the affected area will be
43 isolated and withdrawn from ventilation flow. Isolation operations will utilize current available
44 methods, materials, and equipment.

1
2 Ground control conditions which could result in a fall can be divided into two scenarios: The
3 first consists of spalling (falling) of individual small and localized rock falling on waste
4 containers.

5
6 By definition, they can be considered insignificant as no damage to the drums can occur. The
7 second consists of an entire section of roof falling on multiple stacks of waste containers. Each
8 of these scenarios is discussed below.

9
10
11 Spalling-of-Ground Scenario

12
13 The maximum distance between the room roof and a container of waste is 10 ft. Waste
14 containers are designed to withstand impact loads of at least 1,000 pounds (lbs) dropped
15 from a height of 6 ft. flat or 450 lbs dropped on a circumferential edge from a height of
16 4 ft. Both of which correspond to an allowable impact stress of 25,450 pounds per square
17 inch (psi). Rocks from spalling are small and would not be of sufficient weight when
18 striking a drum from a 10 ft vertical height to cause an impact stress of more than 25,450
19 psi. Taking into account the falling distance, average weight, and the typical shape of the
20 salt rock, the conclusion is that puncturing a drum by spalling is non-credible.

21
22 Fall-of-Ground Scenario

23
24 Fall-of-ground occurs when a large section of roof beam falls onto the waste containers.
25 As previously discussed, the possibility of this occurring in an active room is remote, due
26 to continuous monitoring and engineered roof support systems.

27
28 The following actions have been developed and will be taken by the RCRA Emergency
29 Coordinator should a rock fall occur in an active waste emplacement area of the repository:

30
31 Spalling-of-Ground Actions

- 32
33 1. Determine whether the roof conditions allow for safe entry and if the waste container
34 or containers in question are accessible.

35
36 The process used to determine if a roof condition of a room will allow for safe entry is
37 the same as the ground control inspection process used for inspection of the ground
38 conditions and roof bolt integrity. The inspection will begin at a safe and sound roof
39 starting point and consist of visual inspections of roof bolts, roof, and rib areas for
40 missing or damaged bolts; deformed roof bolt plates; or roof and rib cracks, fractures,
41 or separations. If during the visual inspection suspicious roof bolts, roof, or ribs are
42 found, then operators will proceed with sounding the area in question with a scaling
43 bar for loose roof bolts, bad roof, or ribs (loose roof bolts will not ring when sounded).
44 Bad roof or ribs will have a drummy, hollow, or un-solid sound when struck with the
45 scaling bar. When this operation is performed, a safe avenue for retreat is always
46 maintained. Also maintained is a position such that an unexpected event will not place

1 personnel in a position where the scaling bar or material being scaled could fall on
2 personnel. If the inspection reveals ground that cannot be safely scaled manually or
3 with the available mining equipment, the affected area, up to and including the entire
4 room, will be barricaded and removed from ventilation flow.
5

6 The criteria used to determine whether a waste container is accessible is based on the
7 location of the container, the amount of waste in the room, and the expense of
8 reaching the waste container safely versus the expense of abandonment of the room.
9 For example, if the room is 95% filled and spalling-of-ground punctured a waste
10 container at or near the exit of the room, the decision to isolate the room and move
11 waste emplacement activities to the next room would be prudent.
12

- 13 2. Restrict access in ventilation flow path downstream of the incident.
14
- 15 3. Restrict ventilation to the affected room to ensure that there is no spread of
16 contamination that may have been released. Survey for contamination and establish
17 the boundaries.
18
- 19 4. Inspect accessible and affected containers and containment for signs of leakage or
20 damage.
21
- 22 5. Cover the spill area with material such as plastic or fabric sheets or PVA, in a way that
23 would safely isolate the area.
24
- 25 6. Determine if the covered spill area safely allows for continued waste disposal
26 operations or whether further cleanup is required. If further cleanup is required,
27 provide with cleanup methods described below. Note: Cleaning may not be required
28 since this is the permitted disposal area.
29
- 30 7. Inspect any affected equipment (vehicles, handling equipment, and communication
31 and alarm equipment) for proper function.
32
- 33 8. Repackage spilled waste and repackage, plug, or patch breached waste containers into
34 55 or 85-gallon drums, SWBs, or TDOPs, depending on volume. Temporarily locate
35 overpack waste containers in an adjacent room. Remove only those intact waste
36 containers necessary to clear the area for decontamination.
37
- 38 9. At the underground emplacement room, salt contaminated by a spill of TRU mixed
39 waste will be covered with materials such as salt, plastic or fabric sheets or PVA to
40 isolate it from the workers or removed and packaged as site derived waste in
41 accordance with site procedures for decontaminating surfaces.
42
- 43 10. Manage the radioactive debris as derived waste.
44
- 45 11. Characterize containers of waste based on the waste containers that were damaged.

1
2 12. Replace the removed and derived waste containers into the waste stack as appropriate
3 and update the WWIS.
4

5 13. Document activities and record results.
6

7 Fall-of-Ground Actions
8

- 9 1. Restrict access in ventilation flow path downstream of the incident.
10 2. Restrict the room from ventilation flow by closing bulkhead regulators.
11 3. Survey for radiological contamination and establish the boundary for a Radiological
12 Buffer Area.
13 4. Install barricade devices to remove access.
14 5. At the underground emplacement room, salt contaminated by a spill of TRU mixed
15 waste will be covered with materials such as salt, plastic or fabric sheets, or PVA to
16 isolate it from the worker or removed and packaged as site derived waste using damp
17 rags, hand tools, and HEPA filtered vacuums.

18 The criteria used to determine whether to close the entire panel or just the affected
19 room of waste containers would include the location of the roof fall and the stability of
20 the unaffected roof area in the panel. Techniques to determine the stability would be
21 the same as previously described in this section.
22

23 F-4d(9) Structural Integrity Emergencies

24 In the event of a WIPP facility emergency involving underground structural integrity, the
25 situation will be handled as a natural emergency. Monitoring and inspection procedures ensure
26 the safety and integrity of the WIPP facility underground.
27

28 F-4d(10) Emergency Termination Procedures

29 For the transition from emergency phase to cleanup phase, the following items will be complete:
30

- 31 • Emergency scene will be stable
32 • Release of hazardous substance will be stopped
33 • Reaction of hazardous substance will be controlled
34 • The released hazardous substance will be contained within a localized and manageable
35 area
36 • The area of contamination will be adequately secure from unauthorized entry

1 At every incident involving hazardous materials, there is a possibility that response personnel
2 and their equipment will become contaminated. Emergency response personnel have procedures
3 to minimize contamination or contact, and to properly dispose of contaminated materials.
4

5 For nonemergencies and Incident Level I emergencies, the following methods of
6 decontamination are available for personnel, environment, and/or equipment according to
7 emergency response procedures:
8

- 9 • Absorption
- 10 • Adsorption
- 11 • Chemical degradation
- 12 • Dilution
- 13 • Disposal
- 14 • Isolation
- 15 • Neutralization
- 16 • Solidification

17
18 Any necessary verification of air, soil, or water samples will be directed by the RCRA
19 Emergency Coordinator. Immediately after an emergency, the RCRA Emergency Coordinator
20 will provide for treating, storing, or disposing of recovered waste, contaminated soil or surface
21 water, or any other material that results from a release, fire, or explosion at the facility in
22 accordance with standard operating procedures.
23

24 For Level II and III incidents after the emergency itself is controlled and contained, the RCRA
25 Emergency Coordinator will be responsible for the development and implementation of an
26 incident-specific decontamination plan.
27

28 **The** PPE will be decontaminated or disposed according to procedure before it is returned to its
29 storage location.
30

31 As part of the facility's defense-in-depth approach, equipment will be assumed to be
32 contaminated after each hazardous material response and a thorough check for radioactive
33 contamination will be conducted. If contamination is found, a technically sound
34 decontamination process will be followed. Many types of equipment are difficult to
35 decontaminate and may have to be discarded as hazardous or derived waste. Whenever possible,
36 pieces of equipment will be disposable or made of nonporous material.
37

38 If radioactive contamination is detected on equipment or on structures, it will be assumed that
39 hazardous constituents may also be present. Radiological surveys to determine whether a
40 potential release of hazardous constituents has occurred (Renewal Application Appendix I3) will
41 be used along with other techniques as a detection method to determine when decontamination is
42 required. Radiological cleanup standards will be used to determine the effectiveness of
43 decontamination efforts. To provide verification of the effectiveness of the removal of
44 hazardous waste constituents, once a contaminated surface is demonstrated to be radiologically

1 clean, the "swipe" can be sent for analysis for hazardous constituents. The use of these
2 confirmation analyses is as follows:

3
4 For waste containers, the analyses become documentation of the condition of the
5 container at the time of emplacement. These containers will be placed in the
6 underground without further action, once the radiological contamination is removed,
7 unless there is visible evidence of hazardous waste spills or hazardous waste on the
8 container and this contamination is considered likely to be released prior to emplacement
9 in the underground. In no case shall these containers contain a total liquid content equal
10 to, or which exceeds, one volume percent of the container.

11
12 For area contamination, once the area is cleaned up and is shown to be radiologically
13 clean, it will be sampled for the presence of hazardous waste residues. If the area is
14 large, a sampling plan will be developed. The sampling plan will be approved by the
15 NMED before it is implemented. If the area is small, swipes will be used. If the results
16 of the analysis show that residual contamination remains, a decision will be made
17 whether further cleaning will be beneficial or whether final clean up will be deferred until
18 closure. Appropriate notations will be entered into the operating record to assure proper
19 consideration of formerly contaminated areas at the time of closure. Furthermore,
20 measures such as covering, barricading, and/or placarding will be used as needed to mark
21 areas that remain contaminated.

22
23 For all Contingency Plan emergency responses, the RCRA Emergency Coordinator will ensure,
24 in keeping with standard operating procedures, that, in the affected area(s) of the facility:

- 25
- 26 • No waste that may be incompatible with the released material is treated, stored, or
27 disposed of until cleanup procedures are completed
 - 28 • All emergency equipment listed in the Contingency Plan is cleaned and fit for its
29 intended use, or replaced before operations are resumed

30 F-4e Prevention of Recurrence or Spread of Fires, Explosions, or Releases

31 During an emergency, the RCRA Emergency Coordinator will ensure that reasonable measures
32 are taken so that fires, explosions, and releases do not occur, recur, or spread to TRU mixed
33 waste or other hazardous materials at the facility, as required under 20.4.1.500 NMAC
34 (incorporating 40 CFR §§264.56(e) and (f)). These measures include:

- 35
- 36 • Stopping processes and operations.
 - 37 • Collecting and containing released wastes and materials.
 - 38 • Removing or isolating containers of waste or hazardous substances posing a threat.

- 1 • Ensuring that wastes managed during an emergency are handled, stored, or treated with
2 due consideration for compatibility with other wastes and materials on site and with
3 containers utilized (Section F-4h).
- 4 • Restricting personnel not needed for response activities from the scene of the incident.
- 5 • Evacuating the area.
- 6 • Curtailing nonessential activities in the area.
- 7 • Conducting preliminary inspections of adjacent facilities and equipment to assess
8 damage.
- 9 • Overpacking and/or removing damaged containers/drums from affected areas. Damaged
10 equipment and facilities will be repaired as appropriate.
- 11 • Constructing, monitoring, and reinforcing temporary dikes as needed.
- 12 • Maintaining fire equipment on standby at the incident site in cases where ignitable liquids
13 have been or may be released and ensuring that all ignition sources are kept out of the
14 area. Ignitable liquids will be segregated, contained, confined, diluted, or otherwise
15 controlled to preclude inadvertent explosion or detonation.

16 No operation that has been shut down in response to the incident will be restarted until
17 authorized by the RCRA Emergency Coordinator. Sections F-4g, Incompatible Waste, and F-4h,
18 Post-Emergency Facility and Equipment Maintenance and Reporting, address specific issues
19 related to decreasing the possibility of a recurrence or spread of a release, a fire, or an explosion.
20

21 After resolution of the incident, a Root Cause Analysis will be conducted to review all Level II
22 and Level III incidents for determination of cause, and the corrective action plan to prevent
23 recurrence.
24

25 F-4f Management and Containment of Released Material and Waste

26 Once initial release or spill containment has been completed, the RCRA Emergency Coordinator
27 will ensure that recovered hazardous materials and waste are properly stored and/or disposed, as
28 required by 20.4.1.500 NMAC (incorporating 40 CFR §264.56(g)). For spills of liquid, the
29 perimeter of the spill will be diked with an absorbent material that is compatible with the
30 material(s) released. Free-standing liquid will be transferred to a marked compatible container.
31 The remaining liquid will be absorbed with an absorbent material and swept or scooped into a
32 marked compatible container. Spill residue will be removed. Spills of dry material will be swept
33 or shoveled into a labeled compatible recovery container. Material recovered from the spill will
34 be transferred to clean containers or tanks or to containers or tanks that have held a compatible
35 material. All containers will meet DOT specifications for shipping the wastes, and materials will
36 be recovered.
37

1 Nonradioactive hazardous waste resulting from the cleanup of a fire, an explosion, or a release
2 involving a nonradioactive hazardous waste or hazardous substance at the WIPP facility will be
3 contained and managed as a hazardous waste until such time as the waste is disposed of, or
4 determined to be nonhazardous, as defined in 20.4.1.200 NMAC (incorporating 40 CFR §261)
5 Subparts C and D. In most cases, hazardous materials inventories for the various buildings and
6 areas at the facility will allow a determination of the hazardous materials present in any cleanup
7 of a release or of the residues from an emergency condition. (The quantities of such spills are so
8 small, it is not likely to trigger an Incident Level II or III.) When necessary samples of the waste
9 will be collected and analyzed to determine the presence of any hazardous characteristics and/or
10 hazardous waste constituents; this information is needed to evaluate disposal options. EPA-
11 approved sampling and analytical methods will be utilized. Hazardous wastes will be transferred
12 to the Hazardous Waste Staging Area. The staging area is used to store hazardous waste
13 awaiting transfer to an off-site treatment or disposal facility in accordance with applicable
14 regulations (e.g., 20.4.1 NMAC and DOT regulations). The Hazardous Waste Staging Area for
15 nonradioactive hazardous waste is Buildings 474A and 474B, as shown in Figure F-1.
16 Nonradioactive hazardous wastes will be shipped off-site for disposal at a RCRA permitted
17 disposal facility.

18
19 Under normal operations, administrative controls will be implemented to ensure that hazardous
20 materials and incompatible materials will not be introduced to the radioactive materials area
21 during TRU mixed waste handling operations. Examples of administrative controls include
22 restricting the waste received in the TRU mixed waste management area(s) to TRU mixed waste
23 properly manifested from the generator sites and ensuring that materials used in these area(s) are
24 restricted to only those that have previously been determined to be compatible with the TRU
25 mixed waste. The RCRA Emergency Coordinator will have access to building design
26 information and information on specific equipment used within an area upon which to base a
27 determination of the compatibility of materials with the area. If necessary, the RCRA
28 Emergency Coordinator will use EPA-600/2-80-076, "A Method for Determining the
29 Compatibility of Hazardous Waste," (EPA, 1980) for making compatibility determinations.
30 Waste resulting from the cleanup of a fire, explosion, or release in the miscellaneous unit, the
31 CH TRU mixed waste handling areas, or the RH Complex will be considered derived from the
32 received TRU mixed waste and may be treated and managed as CH TRU mixed waste depending
33 on the surface dose rate.

34
35 In the event of a prolonged cessation of TRU mixed waste handling operations, TRU mixed
36 waste can be placed in areas of the WHB Unit that are available for such contingencies. These
37 areas and the TRU mixed waste containers in them would be located so that adequate aisle space
38 would be maintained for unobstructed movement of personnel and equipment in an emergency.
39 ~~Renewal Application Chapter and Attachments M;~~ [and Renewal Application Appendices M1;](#)
40 [and M2](#) describe the HWMUs in detail, including the facility description, support structures and
41 equipment, security, waste handling areas, ventilation, and fire protection.

42
43 The contaminated area will be decontaminated. If a release is to a permeable surface, such as
44 soil, asphalt, concrete, or other surface, the surface material will be removed and placed in
45 containers meeting applicable DOT requirements. Contaminated soil, asphalt, concrete, or other

1 surface material, as well as materials used in the cleanup (e.g., rags and absorbent material) will
2 be contained and disposed of in the same manner as dictated for the contaminant. Clean soil,
3 new asphalt, or new concrete will be emplaced at the spill location.
4

5 If a spill occurs on an impermeable surface, the surface will be decontaminated with water and/or
6 a detergent. In the event that the spilled material is water reactive, a compatible nonhazardous
7 cleaning solution will be used. Contaminated wash water or cleaning solution will be transferred
8 to an appropriate container, marked, and managed as described above for nonradioactive or
9 radioactive liquid wastes.
10

11 In the event of a hazardous material or hazardous waste release, the RCRA Emergency
12 Coordinator will ensure that no wastes will be received or disposed of in the affected areas until
13 cleanup operations have been completed. This is to ensure that incompatible waste will not be
14 present in the vicinity of the release.
15

16 Because of the restrictions which the WIPP facility places on generators, and because of control
17 of WIPP operations, TRU mixed wastes and derived wastes will not contain any incompatible
18 wastes. However, the areas established for the temporary holding of nonradioactive waste
19 routinely generated at the WIPP facility is divided into bays to accommodate the management of
20 wastes that may be incompatible. If waste is generated as the result of a spill or release of
21 hazardous materials or nonradioactive hazardous waste, the waste generated as a result of
22 abatement and cleanup will be evaluated to determine its compatibility with other wastes being
23 managed in the temporary holding areas. The evaluation will be by identifying the material or
24 waste that was spilled or released and determining its characteristics (e.g., ignitable, reactive,
25 corrosive, or toxic). The waste generated by the abatement and cleanup activities will be stored
26 in that part of the temporary holding area that has been established to manage wastes with which
27 it is compatible.
28

29 For small nonemergency liquid spills (e.g., a detergent solution leaking out of the pump handle
30 during decontamination, a spill of hydraulic fluid while servicing a vehicle), spill control
31 procedures will be used to contain and absorb free-standing liquid. The contaminated absorbent
32 will be swept or shoveled into a compatible container and managed as described above. No
33 notifications will be required, but site procedures require documentation of the incident.
34

35 F-4g Incompatible Waste

36 Implementation of the TSDF-WAC for the WIPP ensures that incompatible TRU mixed waste
37 will not be shipped to the WIPP facility. Nonradioactive waste at the WIPP facility will be
38 carefully segregated during handling and holding and will be transported within and off the
39 facility. The RCRA Emergency Coordinator will not allow hazardous or TRU mixed waste
40 operations to resume in a building or area in which incompatible materials have been released
41 prior to completion of necessary post-emergency cleanup operations to remove potentially
42 incompatible materials. In making the determination of compatibility, the RCRA Emergency
43 Coordinator will have available the resources and information described in Section F-4b,
44 Identification of Hazardous Materials. In addition, ES&H department personnel will be

1 available for consultation. Finally, the RCRA Emergency Coordinator may use EPA-600/2-80-
2 076, (EPA, 1980).

3
4 F-4h Post-Emergency Facility and Equipment Maintenance and Reporting

5 The RCRA Emergency Coordinator will ensure that emergency equipment that is located or used
6 in the affected area(s) of the facility and listed in the Contingency Plan is cleaned and ready for
7 its intended use before operations are resumed, as specified in 20.4.1.500 NMAC (incorporating
8 40 CFR §264.56(h)(2)). Any equipment that cannot be decontaminated will be discarded as
9 waste (e.g., hazardous, mixed, solid), as appropriate. The WIPP facility is committed to
10 replacing any needed equipment or supplies that cannot be reused following an emergency.
11 After the equipment has been cleaned, repaired, or replaced, a post-emergency facility and
12 equipment inspection will be performed, and the results will be documented.

13
14 Cleaning and decontaminating equipment will be accomplished by physically removing gross or
15 solid residue; rinsing with water or another suitable liquid, if required; and/or washing with
16 detergent and water. Decontamination and cleaning will be conducted in a confined area, such
17 as a wash pad or building equipped with a floor drain and sump isolated from the environment.
18 Care will be taken to prevent wind dispersion of particles and spray. Liquid or particulate
19 resulting from cleaning and decontamination of equipment will be placed in clean, compatible
20 containers. Waste produced in an emergency cleanup in the TRU mixed waste handling areas is
21 derived waste and will be emplaced in the underground derived waste emplacement area. Waste
22 resulting from decontamination operations elsewhere in the WIPP facility will be analyzed for
23 hazardous waste constituents and/or hazardous waste characteristics to ensure proper
24 management.

25
26 When the WIPP facility has completed post-emergency cleanup of waste and hazardous residues
27 from areas where waste management operations are ready to resume and the RCRA Emergency
28 Coordinator has ensured that emergency equipment used in managing the emergency has been
29 cleaned or replaced and is fit for service, the notifications will be made by the Permittees to the
30 following: the EPA Region VI Administrator; the Secretary of the NMED; and any relevant local
31 authorities. This post-emergency notification complies with 20.4.1.500 NMAC (incorporating
32 40 CFR §264.56(i)), and is the responsibility of the RCRA Emergency Coordinator.

33
34 F-4i Container Spills and Leakage

35 The waste received at the WIPP facility will meet stringent TSDF-WAC (e.g., no free liquids and
36 less than one percent residual liquids), which will minimize the possibility of waste container
37 degradation and liquid spills. Should a spill or release occur from a container, following an
38 initial assessment of the event, the WIPP facility will immediately take the following actions, in
39 compliance with 20.4.1.500 NMAC (incorporating 40 CFR §264.52(a) and §264.171):

- 40
41
 - Assemble the required response equipment, such as protective clothing and gear, heavy
42 equipment, empty drums, overpack drums, and hand tools

- 1 • Transfer the released material to a container that is in good condition or overpack the
2 leaking container into another container that is in good condition
- 3 • Once the release has been contained, determine the areal extent of migration of the
4 release and proceed with appropriate cleanup action, such as chemical neutralization,
5 vacuuming, or excavation

6 F-4j Tank Spills and Leakage

7 The TRU mixed waste handling areas at the WIPP facility do not include tank storage or
8 treatment of hazardous waste, as defined in 20.4.1.101 NMAC (incorporating 40 CFR §260.10),
9 and as regulated under 20.4.1.500 NMAC (incorporating 40 CFR §264) Subpart J. At the WIPP
10 facility, tanks are used to store water and petroleum fuels only. The petroleum tanks store diesel
11 and unleaded gasoline.

12

13 F-4k Surface Impoundment Spills and Leakage

14 The WIPP facility does not manage hazardous or TRU mixed waste using a surface
15 impoundment, as defined in 20.4.1.101 NMAC (incorporating 40 CFR §260.10), and as
16 regulated under 20.4.1.500 NMAC (incorporating 40 CFR, §264) Subpart K. Surface
17 impoundment regulations are not applicable to the WIPP facility.

18

19 F-5 Emergency Equipment

20 A variety of equipment is available at the facility for emergency response, containment, and
21 cleanup operations in both the HWMUs and the facility in general. This includes equipment for
22 spill control, fire control, personnel protection, monitoring, first aid and medical attention,
23 communications, and alarms. This equipment is immediately available to emergency response
24 personnel. A listing of major emergency equipment available at the WIPP facility, as required
25 by 20.4.1.500 NMAC (incorporating 40 CFR §264.52(e)), is shown in Table F-6. Table F-7
26 identifies the locations where fire suppression systems are provided. Locations of the
27 underground emergency equipment are shown in Figure F-5. The firewater-distribution system
28 map is shown in Figure F-6. The underground fuel area fire-protection system is shown in
29 Figure F-7.

30

31 F-6 Coordination Agreements

32 The Permittees have established MOUs with off-site emergency response agencies for
33 firefighting, medical assistance, hazardous materials response, and law enforcement. In the
34 event that on-site response resources are unable to provide all the needed response actions during
35 either a medical, fire, hazardous materials, or security emergency, the RCRA Emergency
36 Coordinator will notify appropriate off-site response agencies and request assistance. Once on
37 site, off-site emergency response agency personnel will be under the direction of the RCRA
38 Emergency Coordinator.

39

1 The MOUs with off-site cooperating agencies are available from the Permittees. A listing and
2 description of the MOUs with state and local agencies and mining operations in the vicinity of
3 the WIPP facility, as required by 20.4.1.500 NMAC (incorporating 40 CFR §264.37 and
4 §264.52(c)), are:
5

- 6 • An agreement among the Permittees, Intrepid Potash NM LLC, and Mosaic Potash
7 Carlsbad Inc., provides for the mutual aid and assistance, in the form of MRTs, in the
8 event of a mine disaster or other circumstance at either of the two facilities. This
9 provision ensures that the WIPP MOC will have two MRTs available at all times when
10 miners are underground.

- 11 • A memorandum of agreement between the City of Carlsbad, New Mexico, and the WIPP
12 MOC for ambulance service assistance provides that, upon notification by the WIPP
13 MOC, the Carlsbad Fire Department/Ambulance Service will be dispatched from
14 Carlsbad toward the WIPP site by a designated route and will accept the transfer of
15 patient(s) being transported by the WIPP facility ambulance at the point both ambulances
16 meet. If the patient(s) is not transferrable, the Carlsbad Fire Department/Ambulance
17 Service will provide equipment and personnel to the WIPP facility ambulance, as
18 necessary.

- 19 • A MOU between the DOE and the Carlsbad Medical Center provides for the treatment of
20 radiologically contaminated personnel who have incurred injuries beyond the treatment
21 capabilities at the WIPP facility. The DOE will provide transport of the patient(s) to the
22 Carlsbad Medical Center for decontamination and medical treatment.

- 23 • A MOU between the DOE and the Lea Regional Medical Center provides for the
24 treatment of radiologically contaminated personnel who have incurred injuries beyond
25 the treatment capabilities at the WIPP facility. The DOE will provide transport of the
26 patient(s) to the Lea Regional Medical Center for decontamination and medical
27 treatment.

- 28 • A MOU between the DOE and the U.S. Department of Interior (**DOI**), represented by
29 the Bureau of Land Management (**BLM**), Roswell District, provides for a fire-
30 management program that will ensure a timely, well-coordinated, and cost-effective
31 response to suppress wild fire within the withdrawal area using the WIPP incident
32 commander for fire-management activities. The DOI will provide firefighting support if
33 requested. In addition, the MOU provides for responsibilities concerning cultural
34 resources, grazing, wildlife, mining, gas and oil production, realty/lands/rights-of-way,
35 and reclamation.

- 36 • A mutual-aid firefighting agreement between the Eddy County Commission and the DOE
37 provides for the assistance of the Otis and Joel Fire Departments (a volunteer fire district
38 created under the Eddy County Commission and the New Mexico State Fire Marshall's
39 Office), including equipment and personnel, at any location within the WIPP Fire

1 Protection Area upon request by an authorized representative of the WIPP Project. These
2 responsibilities are reciprocal.

- 3 • A mutual-aid agreement between the City of Hobbs and the DOE provides for mutual
4 ambulance, medical, fire, rescue, and hazardous material response services; provides for
5 joint annual exercises; provides for use of WIPP facility radio frequencies by the City of
6 Hobbs during emergencies; and provides for mutual security and law enforcement
7 services, within the appropriate jurisdiction limits of each party.

- 8 • A mutual-aid agreement between the City of Carlsbad and the DOE provides for mutual
9 ambulance, medical, fire, rescue, and hazardous material response services; provides for
10 joint annual exercises; provides for use of WIPP facility radio frequencies by the City of
11 Carlsbad during emergencies; and provides for mutual security and law enforcement
12 services, within the appropriate jurisdiction limits of each party.

- 13 • A MOU between the DOE and the New Mexico Department of Public Safety (**DPS**)
14 concerning Mutual Assistance and Emergency Management applies to any actual or
15 potential emergency or incident that: 1) involves a significant threat to employees of the
16 Permittees or general public; 2) involves property under the control or jurisdiction of
17 either the DOE or the State; 3) involves a threat to the environment which is reportable to
18 an off-site agency; 4) requires the combined resources of the DOE and the state; 5)
19 requires a resource that the DOE has which the State does not have, or a resource the
20 State has which DOE does not have; or 6) involves any other incident for which a joint
21 determination has been made by the DOE and the State that the provisions of this MOU
22 will apply. The MOU provides that the DPS shall permit qualified and security cleared
23 DOE Emergency Management members into the State EOC for the purpose of: a)
24 coordinating communications functions; b) evaluating and maintaining communications
25 capabilities; c) participating in exercises; d) link the State's High Frequency radio
26 communications network with the DOE; and e) assisting the State during radioactive
27 materials accidents that require joint operations or the use of the DOE Radiological
28 Assistance Program team. The DOE shall permit qualified and security cleared members
29 the State Emergency Management community into the DOE's EOCs for the purposes of
30 coordinating communications and activities. Additional duties for each participant are
31 specified for assistance in incidents or emergencies.

32 F-7 Evacuation Plan

33 If it becomes necessary to evacuate the WIPP facility, the assigned on-site and off-site staging
34 areas have been established. The off-site staging areas are outside the security fence. The WIPP
35 facility has implementation procedures for both surface and underground evacuations. Drills are
36 performed on these procedures at the WIPP facility at least once annually. The following
37 sections describe the evacuation plan for the WIPP facility, as required under 20.4.1.500 NMAC
38 (incorporating 40 CFR §264.52(f)).
39

1 F-7a Surface Evacuation On-site and Off-site Staging Areas

2 Figure F-8 shows the surface staging areas. Personnel report to their Office Wardens at
3 designated staging areas where accountability is conducted. If site evacuation is necessary, the
4 RCRA Emergency Coordinator will decide which staging areas are to be used and will advise
5 Office Wardens of the selections. The RCRA Emergency Coordinator will communicate the
6 locations to Office Wardens via office warden pager, radio, plectron, WIPP Security, or
7 telephone, as appropriate. Office Wardens will direct personnel to the selected staging area
8 outside the security fence. Personnel who are working in a contaminated area when site
9 evacuation is announced, will assemble at specific staging areas to minimize contact with other
10 personnel during the evacuation (Figure F-8).

11
12 Office Wardens conduct accountability of personnel assigned to their specific areas. For
13 complete surface accountability, the Office Wardens report to their ACOW, who reports to the
14 COW. When the COW has reports from all ACOWs, surface accountability is reported to the
15 CMRO, who then notifies the RCRA Emergency Coordinator of the accountability.

16
17 The COW and all ACOWs have radios for communication between them and the CMRO. The
18 Office Wardens, Assistant Office Wardens, ACOWs, and COW also have pagers with which
19 they are notified of evacuations. At the staging areas Office Wardens report directly to their
20 ACOW.

21
22 There are three off-site staging areas identified on Figure F-8. The RCRA Emergency
23 Coordinator determines which staging area will be used. Security officers remain at the primary
24 staging area gate 24 hours a day, and the vehicle trap is opened for personnel during emergency
25 evacuations. The north gate has a single person gate and large gate which can be opened, similar
26 to the main gates for the primary staging area. The east gate is a turnstile gate. Upon
27 notification by the RCRA Emergency Coordinator, Security will respond, open gates, and
28 facilitate egress for evacuation.

29
30 The on-site staging areas are identified in Figure F-8. These are used for building or area
31 evacuations as determined by the RCRA Emergency Coordinator.

32
33 F-7b Underground Assembly Areas and Egress Hoist Stations

34 In the event of an underground or surface event, the RCRA Emergency Coordinator can call for
35 underground personnel to report to assembly areas (Figure F-9). Underground personnel are also
36 trained to immediately report to assembly areas under specific circumstances (i.e. loss of
37 underground power or ventilation). If accountability is required, the underground will be
38 evacuated. The Underground Controller is responsible for underground accountability by
39 comparing the brass numbers with the brass tags signed out in the lamproom. Each assembly
40 area contains a Mine Page Phone, miners aid station, and evacuation maps.

41
42 In accordance with 30 CFR §57.11, the mine maintains two escapeways. These escapeways are
43 designated as Egress Hoist Stations. When an underground evacuation is called for, all
44 underground personnel report to the Egress Hoist Stations.

1
2 Decontamination of underground personnel will be conducted the same way as described for
3 surface decontamination. Contaminated personnel are trained to remain segregated from other
4 personnel until RC personnel can respond to the incident at the underground location.
5

6 F-7c Plan for Surface Evacuation

7 Surface evacuation notification is initiated by the RCRA Emergency Coordinator directing the
8 CMRO to sound the surface evacuation alarm. The Office Wardens assist personnel in
9 evacuation from their areas. Evacuation routes and instructions are posted throughout the site.
10

11 If the EST/FPT notifies the ERT members by pager to respond to an identified area, these
12 members will not depart the site during an evacuation, but will report to the EST/FPT for
13 instructions and accountability. The EST/FPT notifies the COW of response members present.
14 These personnel will not evacuate until released by the RCRA Emergency Coordinator.
15

16 F-7d Plan for Underground Evacuation

17 Notification for underground evacuation will be made using the underground evacuation alarm
18 and strobe light signals.
19

20 Personnel will evacuate to the nearest egress hoist station. Primary underground evacuation
21 routes (identified by green reflectors on the rib) will be used, if possible. Secondary
22 underground evacuation routes (identified by red reflectors on the rib) will be used if necessary
23 (Figure F-5). Brass tags will be collected from personnel at the hoist collar on the surface, and
24 taken to the Underground Controller, who functions as an Office Warden. When all brass tags
25 are accounted for, underground accountability is reported to the RCRA Emergency Coordinator.
26

27 Upon reaching the surface, personnel will report to their on-site staging area to receive further
28 instructions.
29

30 Members of the FLIRT and the MRT who may be underground, will evacuate the underground
31 when an underground evacuation is called for. A reentry by the MRT will be performed
32 according to 30 CFR 49 and MSHA regulations for reentry into a mine. The two MRTs are
33 trained in compliance with 30 CFR 49 in mine mapping, mine gases, ventilation, exploration,
34 mine fires, rescue, and recovery.
35

36 F-7e Further Site Evacuation

37 In the event of an evacuation involving the need to transport employees, the following
38 transportation will be available:
39

- 40 • Buses/vans—WIPP facility buses/vans will be available for evacuation of personnel. The
41 buses/vans are stationed in the employee parking lot.

- 1 • Privately Owned Vehicles—Because many employees drive to work in their own
2 vehicles, these vehicles may be utilized in an emergency. Personnel may be directed as
3 to routes to be taken when leaving the facility.

4 These vehicles may be used to transport personnel who have been released from the site by the
5 RCRA Emergency Coordinator.

6 7 F-8 Required Reports

8 The RCRA Emergency Coordinator, on behalf of the Permittees, will note in the operating
9 record the time, date, and details of any incident that requires implementing this Contingency
10 Plan. This notation will be in the facility log maintained by the CMRO. In compliance with
11 20.4.1.500 NMAC (incorporating 40 CFR §264.56(j)), within 15 days after the incident, the
12 Permittees will ensure that a written report on the incident will be submitted to the EPA Region
13 VI Administrator and to the Secretary of the NMED. The report will include:

- 14
15 • The name, address, and telephone number of the Owner/Operator
- 16 • The name, address, and telephone number of the facility
- 17 • The date, time, and type of incident (e.g., fire, explosion or release)
- 18 • The name and quantity of material(s) involved
- 19 • The extent of injuries, if any
- 20 • An assessment of actual or potential hazards to human health or the environment, where
21 this is applicable
- 22 • The estimated quantity and disposition of recovered material that resulted from the
23 incident

24 In addition to the above report, the Permittees will ensure that the ES&H Manager, or designee,
25 submits reports to the appropriate agencies as listed in Tables F-8 and F-9.

26
27 In accordance with 20.4.1.500 NMAC (incorporating 40 CFR §264.56(i)), the Permittees will
28 notify the Secretary of the NMED and EPA Region VI Administrator that the WIPP facility is in
29 compliance with requirements for the cleanup of areas affected by the emergency and that
30 emergency equipment used in the emergency response has been cleaned, repaired, or replaced
31 and is fit for its intended use prior to the resumption of waste management operations in affected
32 areas. The means the WIPP facility will use to meet these requirements are described in Sections
33 F-4e, F-4f, F-4g, and F-4h.

34
35 The WIPP requires the EST/FPT to initiate the "WIPP Hazardous Materials Incident Report" if
36 the Contingency Plan is implemented. A form is attached as Figure F-12. The form is initiated

1 by the EST/FPT. The RCRA Emergency Coordinator, CMRO, and Environmental Compliance
2 representatives complete their respective sections.

3

4 F-9 Location of the Contingency Plan and Plan Revision

5 The owner/operator of the WIPP facility will ensure that copies of this Contingency Plan are
6 available through the WIPP electronic controlled-document distribution system or in appropriate
7 controlled-document locations throughout the facility, and the alternate Emergency Operations
8 Center and the Joint Information Center at the Skeen Whitlock Building, and are, consequently,
9 available to all emergency personnel and organizations described in Section F-2. In addition, the
10 owner/operator will make copies available to the following outside agencies:

11

- 12 • Intrepid Potash NM LLC
- 13 • Mosaic Potash Carlsbad Inc.
- 14 • Carlsbad Fire Department, Carlsbad
- 15 • Carlsbad Medical Center, Carlsbad
- 16 • Lea Regional Medical Center, Hobbs
- 17 • Otis Fire Department, Otis
- 18 • Hobbs Fire Department, Hobbs
- 19 • Joel Fire Department, Carlsbad
- 20 • Bureau of Land Management, Carlsbad
- 21 • New Mexico State Police

22 The owner/operator of the WIPP facility will ensure that this plan is reviewed annually and
23 amended whenever:

24

- 25 • Applicable regulations are revised
- 26 • The ~~RCRA Part B permit~~ **Permit** for the WIPP facility is revised in any way that would
27 affect the Contingency Plan
- 28 • This plan fails in an emergency
- 29 • The WIPP facility design, construction, operation, maintenance, or other circumstances
30 change in a way that materially increases the potential for fires, explosions, or releases of
31 hazardous waste or hazardous constituents or change the response necessary in an
32 emergency

- 1 • The list of RCRA Emergency Coordinators change
- 2 • The list of WIPP facility emergency equipment changes.

1 F-10 List of References

2 U.S. Environmental Protection Agency, "A Method for Determining the Compatibility of
3 Hazardous Waste," EPA-600/2-80-076, 1980.

4
5 U.S. Department of Transportation, Emergency Response Guidebook, U.S. Government
6 Printing Office, 1993.

7
8 ~~Westinghouse Electric Corporation, 1994, "Quality Assurance Project Plan for WIPP Site~~
9 ~~Effluent and Hazardous Materials Sampling," WP-02-EM1, Westinghouse Electric Corporation,~~
10 ~~Carlsbad, New Mexico.~~

11
12 ~~U.S. Department of Energy, "WIPP Safety Analysis Report," DOE/WIPP-95-2065, Rev. 2~~
13

14 ~~U.S. Department of Energy, "WP-12-5, WIPP Radiation Safety Manual".~~

TABLES

1

(This page intentionally blank)

1
 2
 3
 4

**TABLE F-1
 HAZARDOUS SUBSTANCES IN LARGE ENOUGH
 QUANTITIES TO CONSTITUTE A LEVEL II INCIDENT**

Chemical Description	Building Location	Hazard Category
Ethylene Glycol Solution - 35%	Buildings 411; 412; 451; 452; 486; 463; 474C; FAC 414	Immediate (acute) Delayed (chronic)
Gasoline, Unleaded GASC0001	FAC 480	Fire Immediate (acute) Delayed (chronic)
No. 1 Diesel Fuel Oil GASC0210	Oil Depot U/G; FACs 480, 255.1 & 255.2; Transport Tank; Building 456 Trailer 911F	Fire Immediate (acute) Delayed (chronic)
Multiple containers of TRU Waste as described in Renewal Application Appendix M1 Permit Condition III.C.1	WHB Waste Shaft U/G	Delayed (chronic)
Hazardous materials in quantities that exceed 5 times the Reportable Quantity (Per DOE O 151.1) values as defined in 40 CFR 302	It should be noted that WIPP is not expected to possess such quantities.	Fire Immediate (acute) Delayed (chronic)

1
2
3
4

**TABLE F-2
 RESOURCE CONSERVATION AND RECOVERY ACT
 EMERGENCY COORDINATORS**

Name	Address*	Office Phone	Home Phone*
R.A. (Richard) Marshall (primary) ¹		234-8276 or 234-8695	
R.C. (Russ) Stroble (primary) ¹		234-8276 or 234-8554	
M.L. (Tex) Winans (primary) ¹		234-8276 or 234-8273	
J.E. (Joseph) Bealler ²		234-8276 or 234-8916	
M.G. (Mike) Proctor ²		234-8457	
G.L. (Gary) Kessler ²		234-8326	
A.E. (Alvy) Williams ¹ (primary)		234-8216 or 234-8276	
P.J. (Paul) Paneral ²		234-8498	

5
6
7
8
9
10
11

*NOTE: Personal information (home addresses and phone numbers) has been removed from information copies of this application.

¹ The on-duty Facility Shift Manager is the primary RCRA Emergency Coordinator pursuant to 20.4.1.500 NMAC (incorporating 40 CFR §264.52), and is designated to serve as the RCRA Emergency Coordinator.

² The on-duty Facility Operations Engineer is the alternate RCRA Emergency Coordinator and is available as needed.

TABLE F-3
PLANNING GUIDE FOR DETERMINING INCIDENT LEVELS AND RESPONSE

INCIDENT CONDITION	INCIDENT LEVEL		
	I	II *	III *
Product identifications	Placard not required, NFPA 0 or 1 all categories, all Other Regulated Materials A, B, C, and D.	DOT placarded, NFPA 2 for any categories, PCBs without fire, EPA regulated waste. SITE SPECIFIC: Table F-1 and TRU mixed waste AND	Poison A (gas), explosive A/B, organic peroxide, flammable, solid, materials dangerous when wet, chlorine, fluorine, anhydrous ammonia, radioactive materials, NFPA 3 and 4 for any categories including special hazards, PCBs and fire including special hazards, PCBs and fire DOT inhalation hazard, EPA extremely hazardous substances, and cryogenics.
Container size	Container size does not impact this incident level.	Involves multiple packages.	Tank truck.
Fire/explosion potential	Under control.	May spread/may be explosive.	May spread/may be explosive.
Leak severity	No release or small release contained or confined with readily available resources.	Release may not be controllable without special resources.	Release may not be controllable even with special resources.
Life safety	No life-threatening situation from materials involved.	Localized area, limited evacuation area.	Localized area, limited evacuation area.
Environmental impact (Potential)	None.	Limited to incident boundaries	Contained within the Hazardous waste Management Units.
Container integrity	Not damaged.	Damaged but able to contain the contents to allow handling or transfer of product.	Damaged to such an extent that catastrophic rupture is possible.

* Contingency Plan is implemented

1
2
3

**TABLE F-4
 PHYSICAL METHODS OF MITIGATION**

METHOD	CHEMICAL		RADIOLOGICAL	
	LIQUID	SOLID	LIQUID	SOLID
ABSORPTION	YES	NO	YES	NO
COVERING	YES	YES	YES	YES
DIKES, DIVERSIONS	YES	YES	YES	YES
OVERPACK	YES	YES	YES	YES
PLUG/PATCH	YES	YES	YES	YES
TRANSFER	YES	YES	YES	YES
VAPOR SUPPRESSION	YES	YES	NO	NO

4
5
6
7
8
9

**TABLE F-5
 CHEMICAL METHODS OF MITIGATION**

METHOD	CHEMICAL		RADIOLOGICAL	
	LIQUID	SOLID	LIQUID	SOLID
NEUTRALIZATION	YES	YES ⁽¹⁾	NO	NO
SOLIDIFICATION	YES	NO	YES ⁽²⁾	NO

10
11
12

⁽¹⁾ When solid neutralizing agents are used, they will be used simultaneously with water.
⁽²⁾ This method could be utilized for mitigation of firewater involving TRU-waste.

**TABLE F-6
 EMERGENCY EQUIPMENT MAINTAINED
 AT THE WASTE ISOLATION PILOT PLANT**

Equipment	Description and Capabilities	Location
Communications		
Building Fire Alarms	Manual pull stations and automatic devices (sprinkler system flow, and smoke and thermal detectors) trigger fire alarm; locally visible and audible; visual display and alarm in Central Monitoring Room (CMR)	Guard and Security Building, Pumphouse, Warehouse/Shops, Exhaust Filter Building, Support Building, CMR/ Computer Room, Waste Handling Building, TRUPACT Maintenance Facility, SH Hoisthouse, Maintenance Shops, Guard Shack*, Auxiliary Warehouse, Core Storage Building, Engineering Building, Training Facility, Safety Building, Maintenance Shop, Hazardous Waste Storage (non-TRU) Area (Facility 474) *local alarms; not connected to the CMR
Underground Fire Alarms	Automatic/Manual; have priority over other paging channel signals but not override intercom channels; alarms sound in the general area of the control panel and are connected to the underground evacuation alarms; they also interface with the CMR.	Fire detection and control panel locations: Waste Shaft Underground Station, SH Shaft Underground Station, Between E-140 and E-300 in S-2180 Drift, E-O/N-1200, Fuel Station
Site-wide Evacuation Alarm	Transmitted over paging channel of the public address system, overriding its normal use; manually initiated according to procedures requiring evacuation; audible alarm produced by tone generator at 10 decibels above ambient noise level (or at least 75 decibels); flashing strobe lights; radios and/or pagers are used to notify facility personnel outside alarm range. Monthly test are performed on the PA, site notification alarms, and plectrons.	Site-wide
Vehicle Siren	Manual; oscillating; emergency services/surface response vehicles, is mechanical and electronic.	WIPP surface emergency vehicles
Public Address System	Includes intercom phones; handset stations and loudspeaker assemblies, each with own amplifiers; multichannel, one for public address and pages, and others for independent party lines.	Surface and underground
Intraplant Phones	Private automatic branch exchange; direct dial; provide communication link between surface and underground operations	Throughout surface and underground
Mine Page Phones	Battery-operated paging system	CMR, Mine Rescue Room, EOC, lamproom, underground at S550/W30, S100/W30, S1950/E140, SH Shaft Collar and Underground Station, Waste Shaft Collar and Underground Station, FSM desk.
Emergency Pagers	Manual; , intermittent alarm signals	Issued to appropriate emergency personnel

**TABLE F-6
EMERGENCY EQUIPMENT MAINTAINED
AT THE WASTE ISOLATION PILOT PLANT**

Equipment	Description and Capabilities	Location
Plectrons	Tone-alert radio receivers placed in areas not accessible by the public address system	Site-wide
Portable Radios	Two-way, portable; transmits and monitors information to/from other transmitters	Issued to individuals
Plant Base Radios	Two-way, stationary, VHF-FM; linked to Eddy County Sheriff Department, NM State Police, and Otis Fire Department), and WIPP Channels 1-18 (Communication with the Lea County Sheriff's Department, the Hobbs Fire Department, Carlsbad Medical Center and Lea Regional Hospital is available via the Eddy County dispatcher) (Site Security, Site Operations and Site Emergency, maintenance, repeater to Carlsbad). Wireless communications such as cellular phones may be used to contact the Eddy County emergency responders.	Various site locations
Mobile Phones	Provide communications link between WIPP Security and key personnel	Issued to individuals plus emergency vehicles,
Spill Response		
SPILL-X-S Guns and Recharge Powder	Containment; (1) SPILL-X model SC-30-C(Gun) (1) SPILL-X model XC-30-S(Gun) (1) SPILL-X model SC-30-A(Gun); (1) A-Acid, 5 gallon bucket (Recharge Powder) (1) S-Solvent, 5 gallon bucket (Recharge Powder) (1) C-Caustic, 5 gallon bucket (Recharge Powder)	HAZMAT trailer
Absorbent Sheets	Containment or cleanup; (1) 3' x 100' Sheet	HAZMAT trailer
Absorbents	Grab and Go container; spill control bucket; (1) for solvents and neutralizing absorbents; 5 gallon bucket (1) for acids/caustics; 5 gallon bucket	HAZMAT trailer
Absorbent Material	Containment or cleanup; (1) 100 ft. rolled or equivalent socks " Pig" for general liquid (1) 100 ft. rolled or equivalent socks " Pig" for oil	HAZMAT trailer
Air Bag System	Extrication, Stabilization, Cribbing (1) bag system with tank kit and the following bag sizes: (1) 12-ton, (1) 21.8-ton, (1) 17-ton	Surface rescue truck
Air Chisel	Extrication (1) Capable of cutting 3/16" steel	Surface rescue truck
Drum Transfer Pumps and Drum Opener	Containment or cleanup; (1) unit for chemical transfer (1) hand operated pump for petroleum transfer (1) drum opener	HAZMAT trailer

**TABLE F-6
 EMERGENCY EQUIPMENT MAINTAINED
 AT THE WASTE ISOLATION PILOT PLANT**

Equipment	Description and Capabilities	Location
Floor Squeegee	Containment or cleanup; (1) straight rubber blade, nonwood handle	HAZMAT trailer
Foam Concentrate	AFFF 6% (4) 5-gallon pail	Fire truck # 1
Gas Cylinder Leak Control Kit	(1) Series A Hazardous Material Response Kit; contains nonsparking equipment to control and plug leaks	HAZMAT trailer
Portable Generator	(1) Backup power; 5,000 watt; 120 or 240 volt	Surface rescue truck
Hand Tools	Containment and cleanup; Underground rescue truck: (1) 12# Sledge Hammer (1) 3/8" Drive Socket Set (1) 1/2" Drive Socket Set (1) 3/4" Drive Socket Set (1) 25' 1/2" Chain (1) 6' Wrecking Bar (1) Bottle Jack (1) 4# Hammer (1) 18" Crescent Wrench (1) 5' Pry Bar (1) 2' Pry Bar (1) 100' Extension Cord (1) 4' Nylon Sling (1) 6' Nylon Sling (1) 10' Nylon Sling These tools are located in the HAZMAT Trailer. They are non-sparking. (1) 14"L adjustable pipe wrench (1) 15" multi-opening bung wrench (1) hammer/crate opener (1) 8" pipe pliers (1) 8" blade Phillips (1) #2 screwdriver (1) 6" blade standard screwdriver (1) Claw Hammer	Underground rescue truck, HAZMAT trailer
Come-a-longs	(1) 4-ton; cable-type Ratchet lever tool designed specifically for lifting, lowering and pulling applications including jobs requiring rigging, positioning, and stretching. Used in rescue for extrication.	Surface rescue truck and underground rescue truck
Porta-power	(1) 10-ton hydraulic, hand-powered jaws used for extrication during rescues.	Surface rescue truck
Jugs	Containment or cleanup; (4) 1-gallon plastic	HAZMAT trailer
Pails	Containment or cleanup; (3) 5-gallon plastic with lid	HAZMAT trailer
Portable Lighting	(1) Emergency lighting system; 120 volts; 500-watt bulbs, suitable for wet location	Underground rescue truck

**TABLE F-6
 EMERGENCY EQUIPMENT MAINTAINED
 AT THE WASTE ISOLATION PILOT PLANT**

Equipment	Description and Capabilities	Location
Patching Kit	Series A Hazardous Response Kit; Class A; contains nonsparking equipment to control and plug leaks.	HAZMAT trailer
Scoops and Shovels	Cleanup; plastic; various sizes; nonsparking; nonwood handles (1) Scoop (3) Shovels	HAZMAT trailer
Medical Resources		
Ambulance #1	Equipped as per Federal Specifications KKK-A-1822 and New Mexico Emergency Medical Services Act General Order 35; equipped with a radio to Carlsbad Medical Center, VHF radio, UHF medical frequency, cellular phone	Surface (Safety and Emergency Services Facility)
Ambulance #2	Diesel hardcab ambulance equipped with first aid kit, 2 stretchers, and other associated medical supplies	Underground
Rescue Truck	Special purpose vehicle; light and heavy duty rescue equipment; transports 1 litter patient, medical oxygen and supplies for mass casualties, fire suppression support equipment (rescue tool, air bag, K-12 Rescue Saw, 5,000-watt generator, self-contained breathing apparatus (SCBA), and much more equipment	Surface (Safety and Emergency Services Facility)
Fire Detection and Fire Suppression Equipment		
Building Smoke, Thermal Detectors, or Manual Pull Stations	Ionization and photoelectric or fixed temperature/rate of rise detectors; visual display and alarm in CMR; manual pull stations. The underground has manual fire alarm pull stations located where personnel have access when evacuating. These are connected to the U/G evacuation alarm.	Guard and Security Building, Warehouse/Shops, Support Building, CMR/Computer Room, Waste Handling Building, TRUPACT Maintenance Facility, Waste Shaft Collar, Underground Fuel Station, SH Hoisthouse, Engineering Building, Industrial Safety Building, Training Facility
Fire Truck # 1	Equipped per Class "A" fire truck per NFPA; capacity 750 gallons, with pump capacity of 1200 gallons per minute	Surface (Safety and Emergency Services Facility)
Rescue Truck # 2 (U/G)	(1) 125-pound dry chemical extinguisher (1) 150-pound foam extinguisher	Underground
Extinguishers	Individual fire extinguisher stations; various types located throughout the facility, conforming to NFPA-10.	Buildings, underground, and underground vehicles
Automatic Dry Chemical Extinguishing Systems	Automatic; 1,000-pound system (Purple K); actuated by thermal detectors or by manual pull stations	Underground fuel station

**TABLE F-6
 EMERGENCY EQUIPMENT MAINTAINED
 AT THE WASTE ISOLATION PILOT PLANT**

Equipment	Description and Capabilities	Location
Sprinkler Systems	Fire alarms activated by water flow	Pumphouse, Guard and Security Building, Support Building, Waste Handling Building (contact-transuranic waste area only), Warehouse/Shops Building, Auxiliary Warehouse Building, TRUPACT Maintenance Facility, Training Facility, SH Shaft Hoisthouse, Exhaust Filter Building, Engineering Building, and Safety Building
Water Tanks, Hydrants	Fire suppression water supply; one 180,000-gallon capacity tank, plus a second tank with 100,000 gallon reserve	Tanks are at southwestern edge of WIPP facility; pipelines and hydrants are throughout the surface
Fire Water Pumps	Fire suppression water supply; 125 pounds per square inch, 1,500 gallons per minute centrifugal pump, one with electric motor drive, the other with diesel engine; pressure maintenance pump	Pumphouse
Personal Protection Equipment		
Headlamps	Mounted on hard hat; battery operated	Each person underground
Underground Self-Rescuer Units	Short-term rebreathers; approximately 300	Each person underground
Self-Contained Self-Rescuer	At least 60 minutes of oxygen available. Approximately 400 units cached throughout the underground	Cached throughout the underground
Self-Contained Breathing Apparatus (SCBA)	Oxygen supply; 4-hour units; approximately 14 Mine Rescue Team Draeger units	Mine Rescue Training Room
Chemical and Chemical-Supported Gloves	Body protection; (12 pair) inner-cloth, (12 pair) outer-pvc, (5 pair) outer-viton	HAZMAT trailer
Suit, Acid	Body protection; (4) acid	HAZMAT trailer
Suit, Fully Encapsulated	Body protection; used with SCBAs; full outerboot; (4) Level A; (4) Level B	HAZMAT trailer

**TABLE F-6
EMERGENCY EQUIPMENT MAINTAINED
AT THE WASTE ISOLATION PILOT PLANT**

Equipment	Description and Capabilities	Location
Emergency Medical Equipment		
Antishock Trousers	Shock treatment; (2) inflatable, one on each ambulance	Ambulance # 1 and # 2
Zoll 1600 Heart Monitor and Defibrillator	Heart Monitor/defibrillator	Ambulance # 1 and # 2
Oxygen	Patient care; Size D: (2) Ambulance #1 (1) Underground Ambulance (1) Health Services Size E: (1) Rescue Truck (2) Underground Ambulance Size M: (1) Ambulance #1	Ambulance # 1 and # 2, surface rescue truck
Resuscitators (Bag)	Disposable bag resuscitation Ambulance #1: (2) adult size (1) child size Underground Ambulance: (2) adult size	Ambulance # 1, Ambulance # 2
Splints	Immobilize limbs; (1) Adult traction splint, lower extremity, with limb-supporting slings, padded ankle hitch and traction device per ambulance. (2) Rigid splinting devices or equivalents, suitable for immobilization of upper extremities per ambulance. (2) Rigid splinting devices or equivalents, suitable for the immobilization of lower extremities. (1) Set of Airsplints: 6 assorted splints; hand/wrist, half arm, full arm, foot/ankle, half leg, and full leg per miner's aid stations.	Ambulance # 1 and # 2, Miner's Aid Stations
Stretchers	Patient transport; (2) Spine Boards, one short and one long, with nylon straps per ambulance. (also used to perform cardiopulmonary resuscitation) (2) Emergency Stretchers or scoops, or combination per ambulance (1) All-purpose multi-level ambulance stretch (gurney), with 3 safety straps and locking mechanism per ambulance. (1) Stretcher in each miner's aid station.	Various combinations in Ambulance # 1 and # 2, Miner's Aid Station
Suctions	For medical emergencies: Portable (1) Suction unit, capable of delivering at least 300 mm. HG on each ambulance.	Ambulances #1 and #2

**TABLE F-6
EMERGENCY EQUIPMENT MAINTAINED
AT THE WASTE ISOLATION PILOT PLANT**

Equipment	Description and Capabilities	Location
Trauma Kits	<ul style="list-style-type: none"> (1) adult blood pressure cuff and stethoscope (4) soft-roller bandages (3) triangular bandages (1) pkg. band-aids (2) trauma dressings (25) 4X4 sponges (1) roll adhesive tape (1) bite stick (1) penlight (1) sterile burn sheet (1) oropharyngeal airway (1) glucose substance (2) sterile gauze dressings 	(1) kit in each: Ambulances #1 and #2, surface rescue truck
Miner's Aid Station	<p>For First Aid Stations in the Underground</p> <ul style="list-style-type: none"> (1) Stretcher--as referenced above per station (1) Set of airsplints--as referenced above per station (1) Blanket per station (1) Box of latex gloves (50) per station (5) Pathogen Wipes per station (1) First Aid Kit (24) per station; includes, (3) Band-Aid Combo Paks (2) Swabs, PVP (1) Antibiotic Ointment (1) Sting-Kill Swab (2) Dressing, compresses (2) Roller Bandages (2) Tape (2) Triangle Bandage (1) Eyedressing Pak (1) Burn Dressing (1) Ammonia Inhalants (1) User Log Sheet 	Miner's Aid Stations - Various Underground Locations
First Aid Supplies	<p>According to General Order #35</p> <ul style="list-style-type: none"> (12) bandages, soft roller, self-adhering type--4" or 6" x 5 yards. (6) triangular bandages, 40" (1) box band-aids (1) 1 pair bandage shears (6) Trauma dressings, 30" x 10" (6) Trauma dressings, 5" x 7" (50) 4" x 4" sponges, individually wrapped and sterile (2) rolls adhesive tape (1) penlight (2) sterile burn sheets (2) oropharyngeal airways -- adult (2) oropharyngeal airways -- child (Ambulance #1 only) (2) oropharyngeal airways -- infant (Ambulance #1 only) (1) Glucose substance (3) Occlusive dressings (1) Roll aluminum foil (6) Rigid cervical collars--2 each small, medium and large sizes (4) Cold packs (4) Heat packs (2) Bite sticks 	Ambulance #1

**TABLE F-6
EMERGENCY EQUIPMENT MAINTAINED
AT THE WASTE ISOLATION PILOT PLANT**

Equipment	Description and Capabilities	Location
First Aid Supplies	(2) Transfer sheets (2) Blankets	Ambulances #1 and #2
First Aid Supplies	(2) #16g angiosets (2) #18g angiosets (2) #20g angiosets (1) 1000cc LR IV fluid (1) 500cc NS IV fluid	Ambulances #1 and #2, surface rescue truck
General Plant Emergency Equipment		
Emergency Lighting	For employee rescue and evacuation, and fire/spill containment; linked to main power supply, and selectively linked to back up diesel power supply and/or battery-backed power supply	Surface and underground
Backup Power Sources	Two diesel generators, and battery-powered uninterruptible power supply (UPS); use limited to essential loads; manual or remote starting 1,100-kilowatt diesel generators with on-site fuel for 62% load for 3 days for selected loads; 30-minute battery capacity for essential loads	Generators are east of Safety and Emergency Services Building; UPS is located at the essential loads
Hoists	Hoists in Waste Shaft, Air Intake Shaft, and SH Shaft	Waste Shaft, Air Intake Shaft, SH Shaft
Radiation Monitoring Equipment	(5) Portable alpha and beta survey meters, portable air samplers, and portable continuous air monitors	Building 412
Emergency Shower	For emergency flushing of contaminated individual	Surface
Eye Wash Fountains	For emergency flushing of affected eyes	Various locations on surface and in the underground
Decon Shower Equipment	Self-contained decon shower trailer, portable decon shower unit, disposable decon shower	Surface
Overpack containers	14-85 Gallon drums 4-SWBs 1-TDOP	Building 481 Building 481 Building 481
HEPA Vacuums	2 HEPA Vacuums to be utilized for removal of contamination.	Building 481
Aquaset or Cement	100 lbs. of aquaset or cement material for solidification of liquid waste generated as a result of fire fighting water or decontamination solutions.	Building 481
Polyvinyl Alcohol or Paint	1 - 5 gallon bucket of approved fixative to be used during recovery.	Building 481
TDOP Upender	Upender facilitates overpacking standard waste boxes	Building 481

TABLE F-6
EMERGENCY EQUIPMENT MAINTAINED
AT THE WASTE ISOLATION PILOT PLANT

Equipment	Description and Capabilities	Location
Non hazardous Decontaminating Agents	4-1 Gallon bottles for decontamination of surfaces, equipment, and personnel	Building 481

1
2
3

**TABLE F-7
 TYPES OF FIRE SUPPRESSION SYSTEMS BY LOCATION**

LOCATION	AS	AD	MPS	PFE
Waste Handling Building	*		*	*
Support Building	*		*	*
Exhaust Filter Building	*		*	*
Water Pumphouse	*		*	*
Underground Support Areas (also has rescue truck) (as illustrated in Figure F-5)		*	*	*
Station A Effluent Monitoring Shed			*	*
Station B Effluent Monitoring Shed			*	*

4
5
6
7
8
9

⁽¹⁾Symbols for WIPP fire-protection systems:

- AS = Automatic Wet Pipe Sprinkler System
- AD = Automatic Dry Chemical Extinguishing System
- MPS = Manual Pull Stations
- PFE = Portable Fire Extinguishers

10
11
12
13
14
15
16
17

⁽²⁾The Waste Handling Building and the Support Building contain the following:

- Automatic wet pipe sprinklers
- Fire detection in the heating, ventilation, and air conditioning instrumentation (Support Building, only)
- Manual pull stations
- Portable fire extinguishers
- Automatic detectors

18
19
20
21
22
23

The Safety and Emergency Services Building contains the following:

- Automatic wet pipe sprinklers
- Manual pull stations
- Portable fire extinguishers
- Automatic detectors

24
25
26
27

The Core Storage Building contains the following:

- Automatic wet pipe sprinklers
- Portable fire extinguishers

28
29

⁽³⁾The Exhaust Filter Building, Underground Facilities, Warehouse/Shops Building, Water Pumphouse, and Salt Handling Hoist house also have portable fire extinguishers, manual pull stations, and automatic detectors.

**TABLE F-8
HAZARDOUS RELEASE REPORTING, FEDERAL**

Statute	Chemical Releases Covered	To Whom Report Will Be Made	What Will Be Reported	
			Immediately (Oral)	Subsequently (Written)
Comprehensive Environmental Response, Compensation and Liability Act (CERCLA)/Superfund Amendments and Reauthorization Act (SARA) (40 CFR Part 302)	"Reportable quantities" of CERCLA/SARA "hazardous substances."	National Response Center: (800) 424-8802, State Emergency Response Commission: (505) 476-9681 (New Mexico State Police, Hazardous Materials Emergency Response), and Local Emergency Planning Committee: (505) 885-3581	1) Chemical identification; 2) what hazardous substance; 3) quantity released; 4) time, location and duration of release; 5) media of release; 6) health risks and medical advice; 7) proper precautions (e.g., evacuation); and 8) name and phone number of reporter and facility.	As soon as practicable, update of oral notice and response action taken. Send report to: New Mexico State Emergency Response Commission, Department of Public Safety, Title III Bureau, P.O. Box 1628, Santa Fe, New Mexico, 87504-1628, and Local Emergency Planning Committee, 324 S. Canyon Street, Suite B, Carlsbad, New Mexico 88220. National Response Center will contact the U.S. Environmental Protection Agency (EPA). EPA may request a written report.
Emergency Planning and Community Right-to-Know Act (SARA Title III) (40 CFR Parts 302 and 355)	SARA Title III "extremely hazardous substances."	National Response Center: (800) 424-8802, State Emergency Response Commission: (505) 476-9681 (New Mexico State Police, Hazardous Materials Emergency Response), and Local Emergency Planning Committee: (505) (575) 885-3581.	1) Chemical identification; 2) what extremely hazardous substance; 3) quantity released; 4) time, location and duration of release; 5) media of release; 6) health risks and medical advice; 7) proper precautions (e.g. evacuation); and 8) name and phone number of reporter and facility.	As soon as practicable, update of oral notice and response action taken. Send report to: New Mexico State Emergency Response Commission, Department of Public Safety, Title III Bureau, P.O. Box 1628, Santa Fe, New Mexico, 87504-1628, and Local Emergency Planning Committee, 324 S. Canyon Street, Suite B, Carlsbad, New Mexico 88220. National Response Center will contact the U.S. Environmental Protection Agency (EPA) for an address if a written report is requested by EPA.
Resource Conservation and Recovery Act (RCRA), 40 CFR §§264.56(a) and 265.56(a)	Any imminent or actual emergency situation.	State or local agencies with designated response roles, if their help is needed: Carlsbad Police Department: (575) 885-2111; Carlsbad Fire Department: (575) 885-2111; Eddy County Sheriff: (575) 887-7551.	What assistance is required.	Not Applicable (NA)

**TABLE F-8
HAZARDOUS RELEASE REPORTING, FEDERAL**

Statute	Chemical Releases Covered	To Whom Report Will Be Made	What Will Be Reported	
			Immediately (Oral)	Subsequently (Written)
RCRA, 40 CFR §§264.56(d), 264.56(i), 265.56(d), and 265.56(i)	RCRA "hazardous waste" release, fire, or explosion, which could threaten human health or environment outside the facility.	National Response Center: (800) 424-8802 and State Emergency Response Commission: (505) 476-9681 (New Mexico State Police, Hazardous Materials Emergency Response).	(1) Name and telephone number of reporter; (2) name and telephone number of facility; (3) time and type of incident; (4) name and quantity of materials involved; (5) extent of injuries, if any; and (6) possible health or environmental hazards outside the facility.	Prior to resumption of operations, notify that: (1) no waste that may be incompatible with released material is treated, stored, or disposed of until cleanup is complete, and (2) all emergency equipment listed in the Contingency Plan is cleaned and fit for its intended use. Send to Secretary, New Mexico Environment Department, P.O. Box 26110, Santa Fe, New Mexico, 87502.
RCRA, 40 CFR §§264.56(i), 264.56(j), 265.56(i), and 265.56(j)	Any incident which triggers implementation of Contingency Plan.	New Mexico Environment Department, Emergency Response Office, 24-hour telephone: (505) 827-9329 (emergencies); for non-emergencies contact (866) 428-6535 (24 hour voice mail) or Monday to Friday, 8 am to 5 pm: (505) 428-2500.	NA	Within 15 days: 1) name, address and telephone number of owner/operator; 2) name, address and telephone number of facility; 3) date, time and type of incident (e.g. fire, explosion); 4) name and quantity of materials involved; 5) extent of injuries, if any; 6) possible hazards to human health or the environment; 7) estimated quantity of material that resulted from the incident. Prior to resumption of operations, notify that: 1) no waste that may be incompatible with released material is treated, stored, or disposed of until cleanup is complete, and 2) all emergency equipment listed in the Contingency Plan is cleaned and fit for its intended use. Send to Secretary, New Mexico Environment Department, P.O. Box 26110, Santa Fe, New Mexico, 87502.

**TABLE F-9
HAZARDOUS RELEASE REPORTING, STATE OF NEW MEXICO**

Regulations	Chemical Releases Covered	To Whom Report Will Be Made	What Will Be Reported	
			Immediately (Oral)	Subsequently (Written)
Title 20 of the New Mexico Administrative Code, Chapter 4, Part 1 (20.4.1 NMAC), Subpart V and Subpart VI	RCRA "hazardous waste" releases, fire, or explosion, which could threaten human health or environment outside the facility.	National Response Center: (800) 424-8802; State Emergency Response Commission and (505) 476-9620 (New Mexico State Police, Hazardous Materials Emergency Response)	1) Name and telephone number of reporter; 2) name and telephone number of facility; 3) time and type of incident; 4) name and quantity of material involved; 5) extent of injuries, if any; and 6) possible health or environmental hazards outside the facility.	Prior to resumption of operations, notify that: 1) no waste that may be incompatible with released material is treated, stored, or disposed of until cleanup is complete, and 2) all emergency equipment listed in the Contingency Plan is cleaned and fit for its intended use. Send to Secretary, New Mexico Environment Department, P.O. Box 26110, Santa Fe, New Mexico, 87502.
20.4.1 NMAC, Subpart V and Subpart VI	Any incident which triggers implementation of Contingency Plan.	New Mexico Environment Department, Emergency Response Office, 24-hour telephone: (505) 827-9329 (emergencies); for non-emergencies contact (866) 428-6535 (24 hour voice mail) or Monday to Friday, 8 am to 5 pm: (505)428-2500.	1) Name and telephone number of reporter; 2) name and address of facility; 3) name and quantity of materials involved, to extent known; 4) extent of injuries, if any; and 5) possible hazards to human health or the environment, outside the facility.	Within 15 days: 1) name, address and telephone number of owner/operator; 2) name, address and telephone number of facility; 3) date, time and type of incident (e.g., fire, explosion); 4) name and quantity of materials involved; 5) extent of injuries, if any; 6) possible hazards to human health or the environment; and 7) estimated quantity of material that resulted from the incident. Prior to resumption of operations, notify that: 1) no waste that may be incompatible with released material is treated, stored or disposed of until cleanup is complete, and 2) all emergency equipment listed in the Contingency Plan is cleaned and fit for its intended use. Send to Secretary, New Mexico Environment Department, P.O. Box 26110, Santa Fe, New Mexico, 87502.

**TABLE F-9
HAZARDOUS RELEASE REPORTING, STATE OF NEW MEXICO**

Regulations	Chemical Releases Covered	To Whom Report Will Be Made	What Will Be Reported	
			Immediately (Oral)	Subsequently (Written)
New Mexico Emergency Management Act, Section 74-4B-5	Any accident (spill) involving hazardous materials (including hazardous substances, radioactive substances, or a combination thereof) which may endanger human health or the environment.	New Mexico Environment Department: (505) 827-9329, State Emergency Response Commission: (505) 476-9681 (New Mexico State Police, Hazardous Materials Emergency Response), and Local Emergency Planning Committee: (505) (575) 885-3581	1) Name, address and telephone number of owner or operator; 2) name, address and telephone number of facility; 3) date, time and type of incident; 4) name and quantity of material(s) involved; 5) extent of any injuries; 6) assessment of actual or potential threat to environment or human health; and 7) estimated quantity and disposition of recovered material.	Written submission within one week of time permittees become aware of discharge. Same as oral and description of noncompliance and its cause, the period of noncompliance including exact dates and times, and if the noncompliance has not been corrected, the anticipated time it is expected to continue; and steps taken or planned to reduce, eliminate, and prevent reoccurrence. Send reports to New Mexico Environment Department, Chief, Groundwater Quality Bureau, P.O. Box 26110, Santa Fe, New Mexico, 87502, New Mexico State Emergency Response Commission Department of Public Safety, Title III Bureau, P.O. Box 1628 Santa Fe, New Mexico, 87504-1628, and Local Emergency Planning Committee, 324 S. Canyon Street, Suite B, Carlsbad, New Mexico 88220.
New Mexico Water Quality Control Commission, Part 1, Section 203	Any discharge from any facility of oil or any other water contaminant in such quantities as may, with reasonable probability, injure or be detrimental to human health, animal or plant life, or property.	Chief, Groundwater Quality Bureau, New Mexico Environment Department, or his counterpart in any constituent agency delegated responsibility for enforcement of the rules as to any facility subject to such delegation (505) 827-2918.	Within 24 hours: 1) the name, address, and telephone number of the person or persons in charge of the facility; 2) the name, address, and telephone number of the owner/operator of the facility; 3) the date, time, location, and duration of the discharge; 4) the source and cause of the discharge; 5) a description of the discharge, including its chemical composition; and 6) the estimated volume of discharge, and immediate damage from the discharge.	Submit within seven days: verification of the prior oral notification, also provide any appropriate additions or corrections to the information contained in the prior oral notification. Within 15 days: submit a written report describing any corrective actions taken and/or to be taken relative to the discharge. Send reports to Chief, Groundwater Quality Bureau, New Mexico Environment Department, P.O. Box 26110, Santa Fe, New Mexico, 87502.

**TABLE F-9
 HAZARDOUS RELEASE REPORTING, STATE OF NEW MEXICO**

Regulations	Chemical Releases Covered	To Whom Report Will Be Made	What Will Be Reported	
			Immediately (Oral)	Subsequently (Written)
New Mexico Underground Storage Tank Regulations-2	Any known or suspected release from an Underground Storage Tank (UST) system, any spill or any other emergency situation.	New Mexico Environment Department Petroleum Storage Tank Bureau (505) 984-1741.	Within 24 hours: 1) the name, address, and telephone number of the agent in charge of the site at which the UST system is located, as well as the owner/operator of the system; 2) the name and address of the site and the location of the UST system on that site; 3) the date, time, location, and duration of the spill, release, or suspected release; 4) the source and cause of the spill, release, or suspected release; 5) a description of the spill, release, or suspected release, including its chemical composition; 6) the estimated volume of the spill, release, or suspected release; and 7) action taken to mitigate immediate damage from the spill, release, or suspected release.	New Mexico Underground Storage Tank Regulations-2

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23

(This page intentionally blank)

1
2

FIGURES

1

(This page intentionally blank)

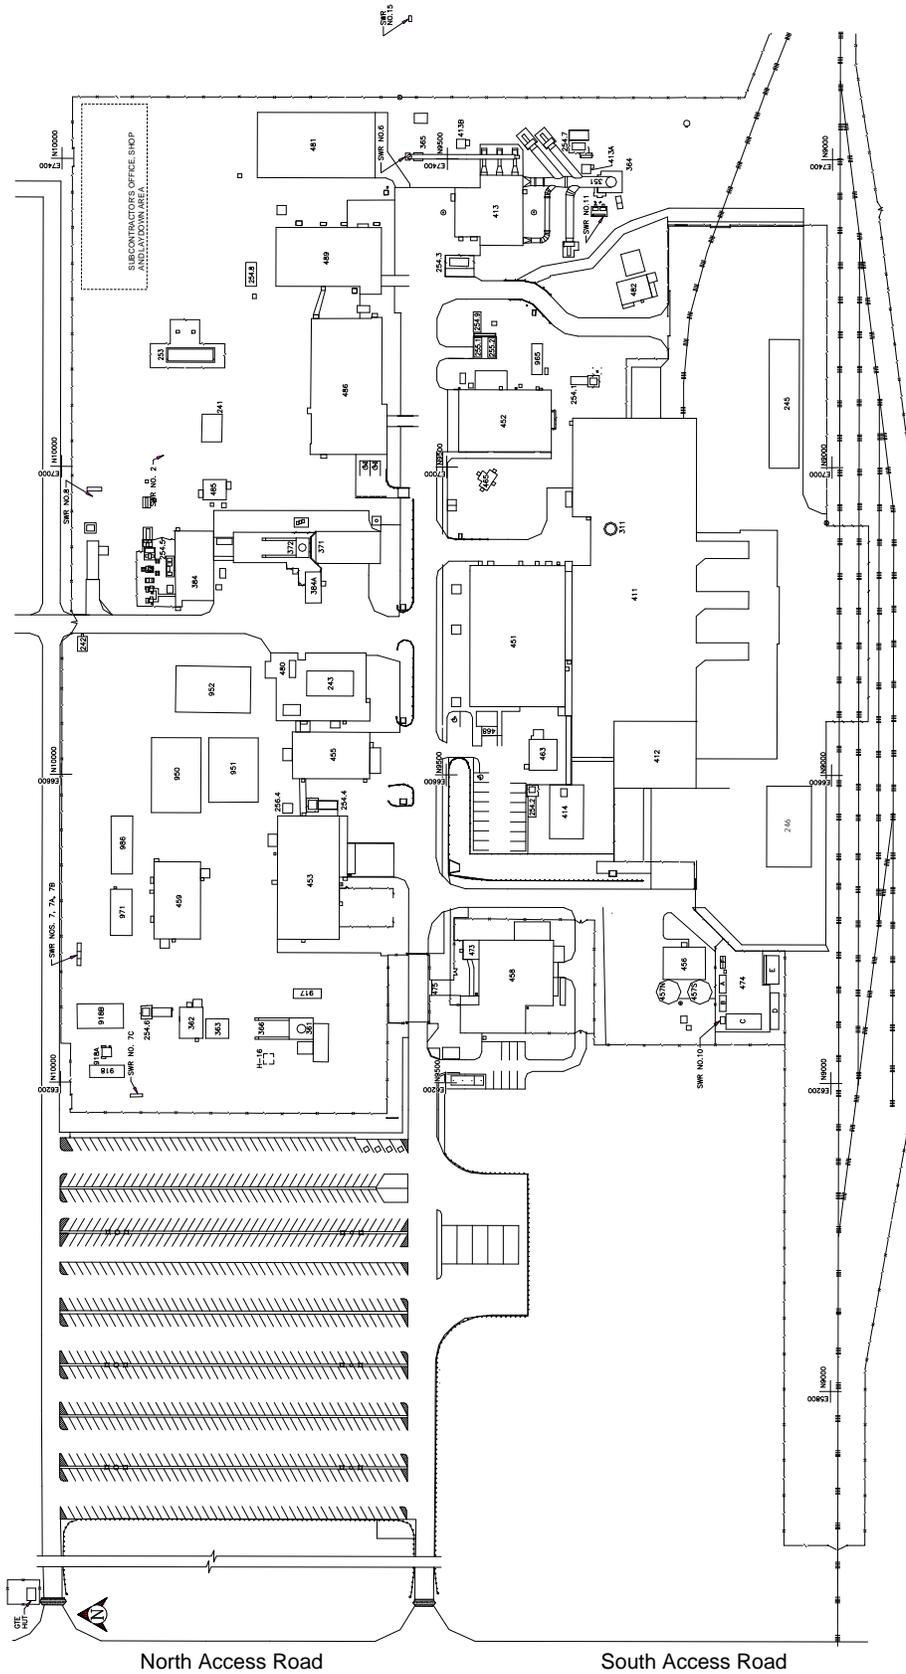


Figure F-1
WIPP Surface Structures

Waste Isolation Pilot Plant
Hazardous Waste Facility Permit
Draft Renewal Application
May 2009

BLDG./ FAC.#	DESCRIPTION	BLDG./ FAC.#	DESCRIPTION	BLDG./ FAC.#	DESCRIPTION
#241	EQUIPMENT SHED	#384	SALT HANDLING SHAFT HOISTHOUSE	#475	GATEHOUSE
#242	GUARDSHACK	#384A	MINING OPERATIONS	#480	VEHICLE FUEL STATION
#243	SALT HAULING TRUCKS SHELTER	#411	WASTE HANDLING BUILDING	#481	WAREHOUSE ANNEX
#245	TRUPACT TRAILER SHELTER	#412	TRUPACT MAINTENANCE BUILDING	#482	EXHAUST SHAFT HOIST EQUIP. WAREHOUSE
#246	MgO STORAGE SHELTER	#413	EXHAUST SHAFT FILTER BUILDING	#485	SULLAIR COMPRESSOR BUILDING
#253	13.8 KV SWITCHGEAR 25p-SWG15/1	#413A	MONITORING STATION A	#486	ENGINEERING BUILDING
#254.1	AREA SUBSTATION NO. 1 25P-SW15.1	#413B	MONITORING STATION B	#489	TRAINING BUILDING
#254.2	AREA SUBSTATION NO. 2 25P-SW15.2	#414	WATER CHILLER FACILITY & BLDG	#H-16	SANDIA TEST WELL
#254.3	AREA SUBSTATION NO. 3 25P-SW15.3	#451	SUPPORT BUILDING SAFETY & EMERGENCY SERVICES FACILITY	#917	7A, 7B AIS MONITORING
#254.4	AREA SUBSTATION NO. 4 25P-SW15.4	#452	WAREHOUSE/SHOPS BUILDING	#918	VOC TRAILER
#254.5	AREA SUBSTATION NO. 5 25P-SW15.5	#453	AUXILIARY WAREHOUSE BUILDING	#918A	VOC AIR MONITORING STATION
#254.6	AREA SUBSTATION NO. 6 25P-SW15.6	#455	WATER PUMPHOUSE	#918B	VOC LAB TRAILER
#254.7	AREA SUBSTATION NO. 7 25P-SW15.7	#456	WATER TANK 25-D-001B	#950	WORK CONTROL TRAILER
#254.8	AREA SUBSTATION NO. 8 25P-SW15.8	#457N	WATER TANK 25-D-001A	#951	PROCUREMENT/PURCHASING TRAILER
#254.9	480V SWITCHGEAR (25P-SWGO4/9)	#457S	GUARD AND SECURITY BUILDING	#952	SAMPLE LABORATORY TRAILER
#255.1	BACK-UP DIESEL GENERATOR #1 25-PE 503	#458	CORE STORAGE BUILDING	#971	HUMAN RESOURCES TRAILER
#255.2	BACK-UP DIESEL GENERATOR #2 25-PE 504	#459	COMPRESSOR BUILDING	#986	PUBLICATIONS & PROCEDURES TRAILER
#256.4	SWITCHBOARD #4 (25P-SBD04/4)	#463	AUXILIARY AIR INTAKE	SWR NO. 6	SWITCHRACK NO. 6
#311	WASTE SHAFT	#465	TELEPHONE HUT	SWR NO. 7	7A, 7B SWITCHRACK NO. 7, 7A, 7B
#351	EXHAUST SHAFT	#468	ARMORY BUILDING	SWR NO. 7C	SWITCHRACK NO. 7C
#361	AIR INTAKE SHAFT	#473	HAZARDOUS WASTE STORAGE FACILITY	SWR NO. 10	SWITCHRACK NO. 10
#362	AIR INTAKE SHAFT/HOIST HOUSE	#474	HAZARDOUS WASTE STORAGE BUILDING	SWR NO. 11	SWITCHRACK NO. 11
#363	AIR INTAKE SHAFT/WINCH HOUSE EFFLUENT MONITORING INSTRUMENT	#474A	HAZARDOUS WASTE STORAGE BUILDING	SWR NO. 12	SWITCHRACK NO. 12
#364	SHED A EFFLUENT MONITORING INSTRUMENT	#474B	OIL & GREASE STORAGE BUILDING	SWR NO. 15	SWITCHRACK NO. 15
#365	SHED B	#474C	GAS BOTTLE STORAGE BUILDING		
#366	AIR INTAKE SHAFT HEADFRAME	#474D	HAZARD MATERIAL STORAGE BUILDING		
#371	SALT HANDLING SHAFT	#474E	WASTE OIL RETAINER		
#372	SALT HANDLING SHAFT HEADFRAME	#474F			

Figure F-1a
Legend to Figure F-1

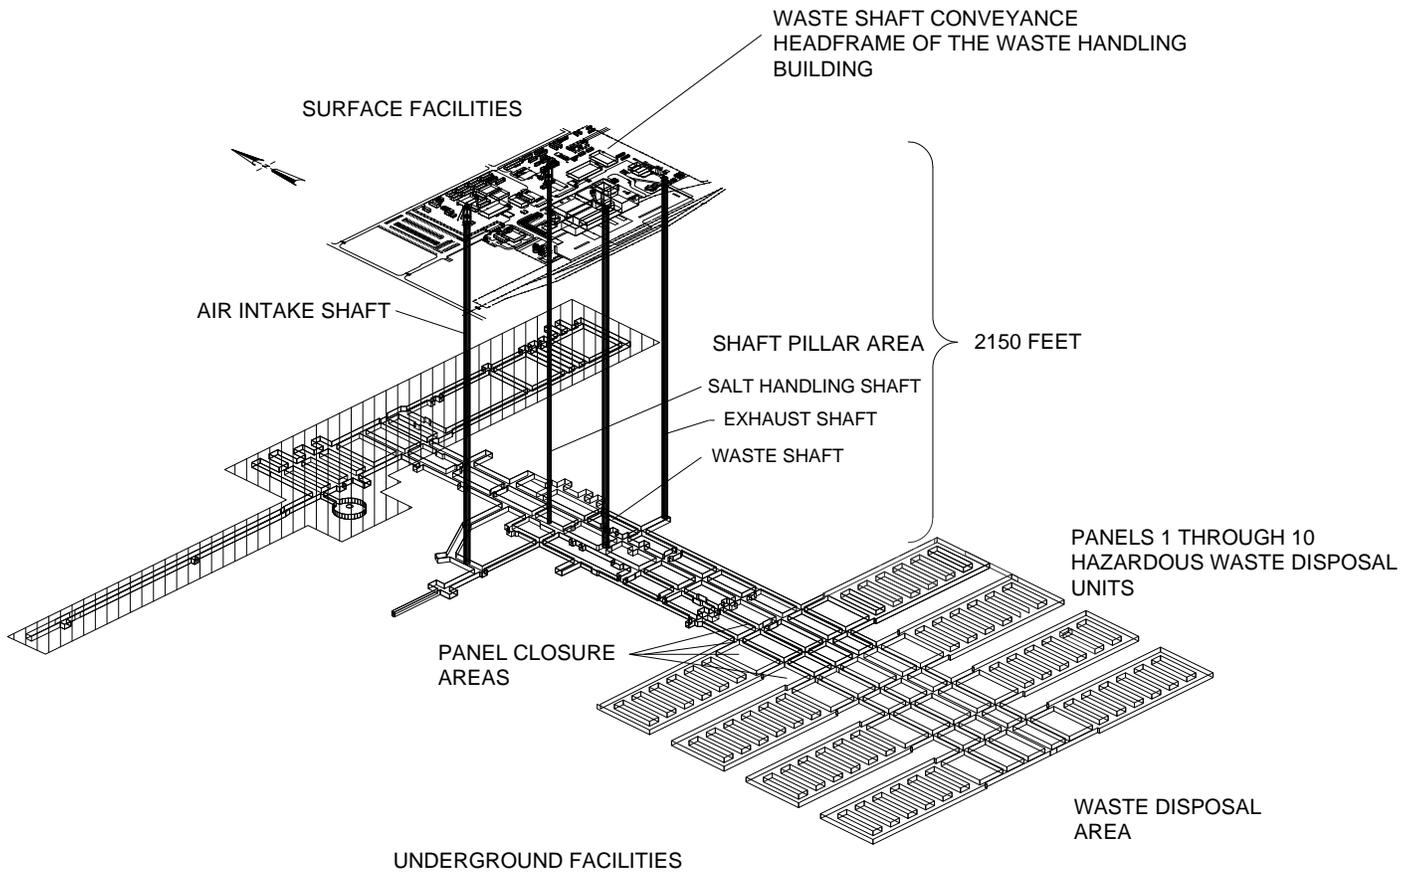


Figure F-2
Spatial View of the WIPP Facility

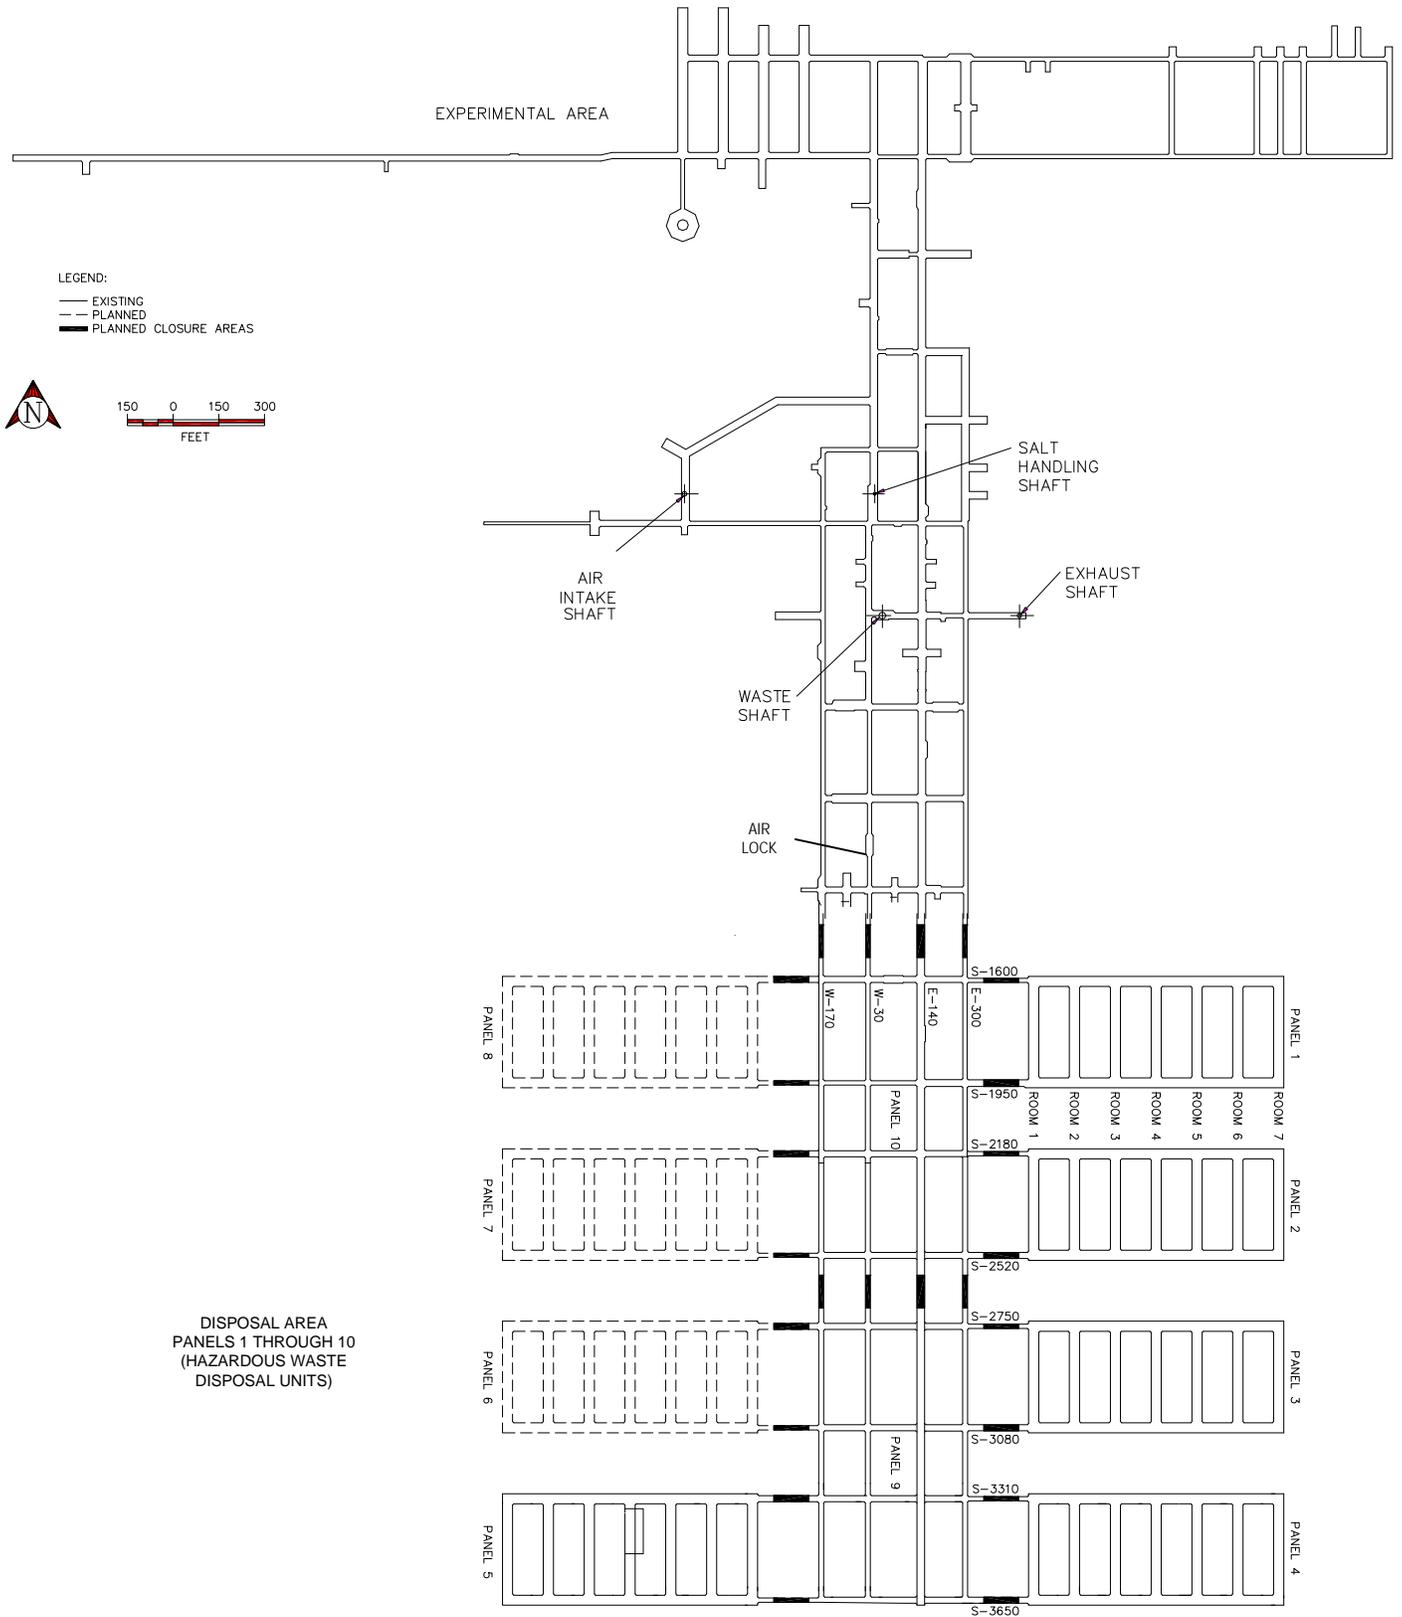


Figure F-3
 WIPP Underground Facilities

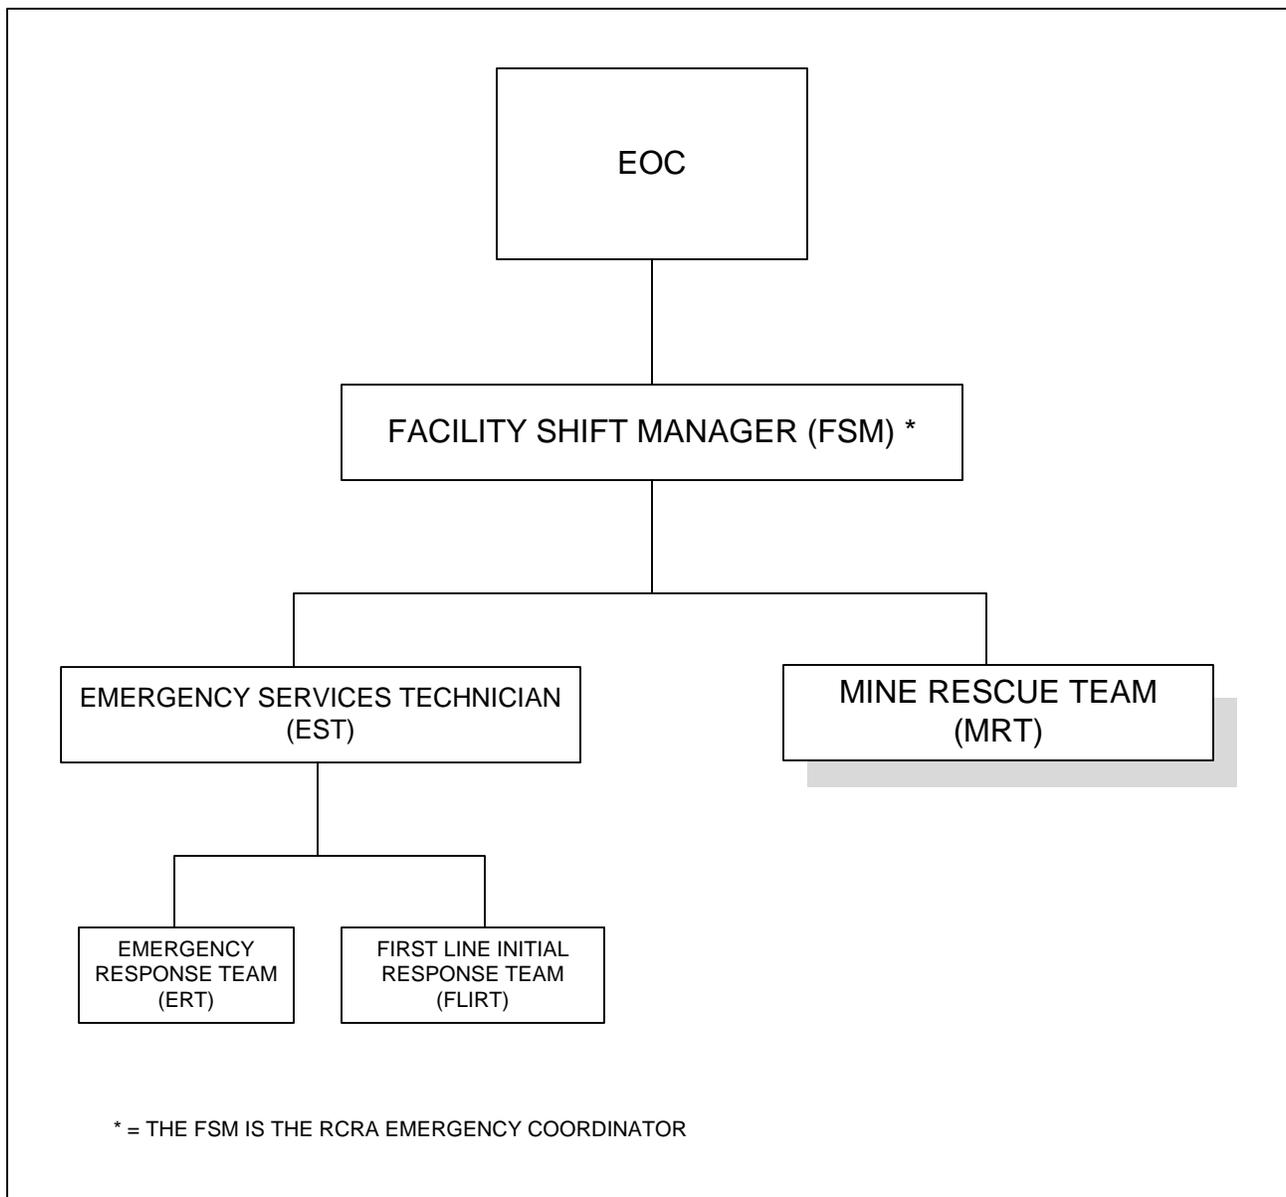


Figure F-4
Direction and Control Under Emergency Conditions in Which the Plan Has Been Implemented

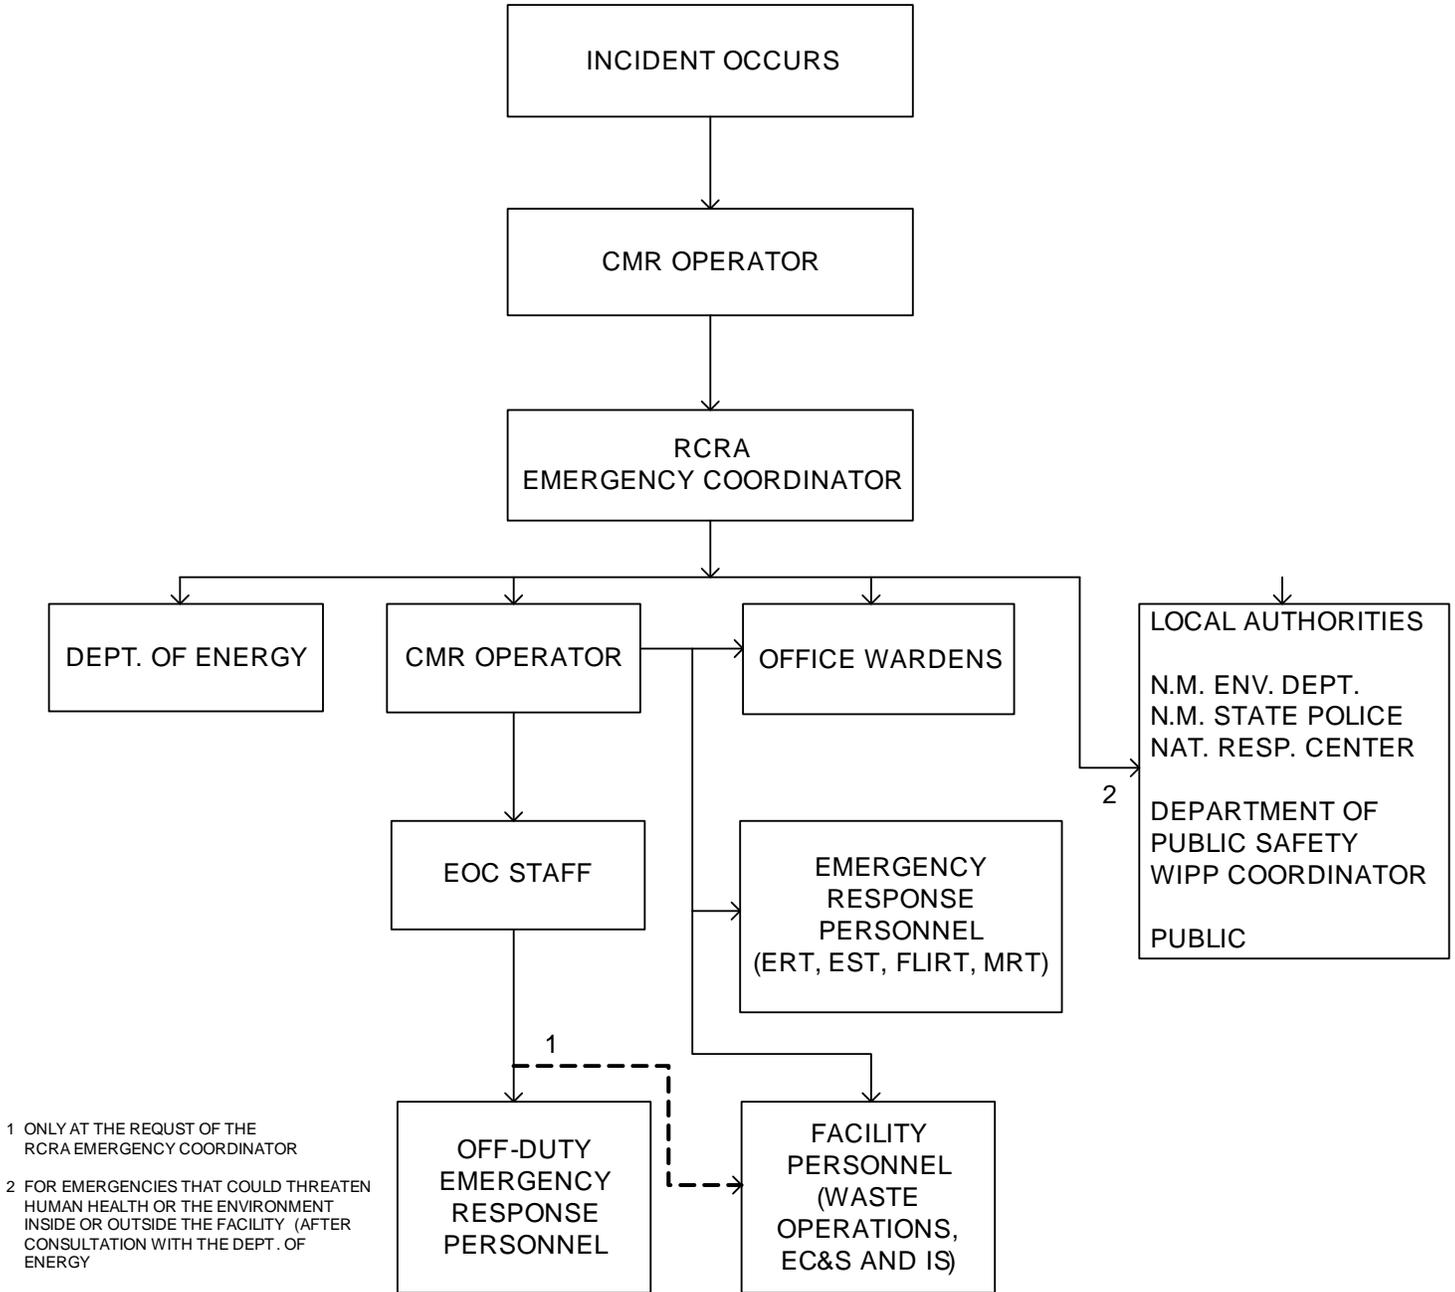


Figure F-4a
 WIPP Facility Emergency Notifications

GENERAL INSTRUCTIONS

ANY TIME AN EVACUATION ALARM IS SOUNDED PROCEED TO THE NEAREST EGRESS HOIST STATION.

ALL CARTS, TRUCKS, ETC. WILL BE PARKED.

CONTACT THE CMR VIA MINE PAGER PHONE, DIAL PHONE, OR GATRONICS ON DIRECTION FROM THE CMR OPERATOR. PROCEED ON FOOT TO THE NEAREST EGRESS HOIST STATION.

INFORMATION

PRIMARY ESCAPE - INTAKE AIR - GREEN REFLECTIVE MARKERS INDICATE YOU ARE HEADING TOWARD A SHAFT IN INTAKE AIR


SECONDARY ESCAPE - EXHAUST AIR - RED REFLECTIVE MARKERS INDICATE YOU ARE HEADING TOWARD A SHAFT IN EXHAUST AIR

WHITE REFLECTIVE MARKERS INDICATE YOU ARE IN INTAKE AIR OR EXHAUST AIR HEADING AWAY FROM A SHAFT

NOTE:
 SECONDARY ESCAPE ROUTE WILL ONLY BE USED UNTIL CLEAR ACCESS AT A BULKHEAD PAST THE BLOCKED AREA TO THE PRIMARY ACCESS ROUTE IS FOUND.

LEGEND

- ⊖ PE PRIMARY ESCAPEWAY
- ⊖ SE SECONDARY ESCAPEWAY
- ▬ UNPASSABLE BULKHEAD (PROHIBITED AREA)
- ⊕ OVERCAST
- ⊕ VERTICAL SHAFT
- ⊕ FIRST AID STATION (PHONE)
- ∞ EYE WASH STATION
- ① AMBULANCE
- ② RESCUE TRUCK
- ③ DRY CHEMICAL SYSTEM
- ④ FIRE ALARM HAND SWITCH (PHONE)
- ⑤ FIRE ALARM PANEL
- ⑥ SALT HANDLING SHAFT ASSEMBLY AREA (PHONE)
- ⑦ SH SHAFT UNDERGROUND STATION EMERGENCY AREA (PHONE)
- ⑧ WASTE SHAFT UNDERGROUND STATION ASSEMBLY AREA (PHONE)
- ⑨ S-1950 & E-140 ASSEMBLY AREA (PHONE)
- ⑩ S-1000 ASSEMBLY AREA (PHONE)
- ⑪ THERMAL DETECTOR

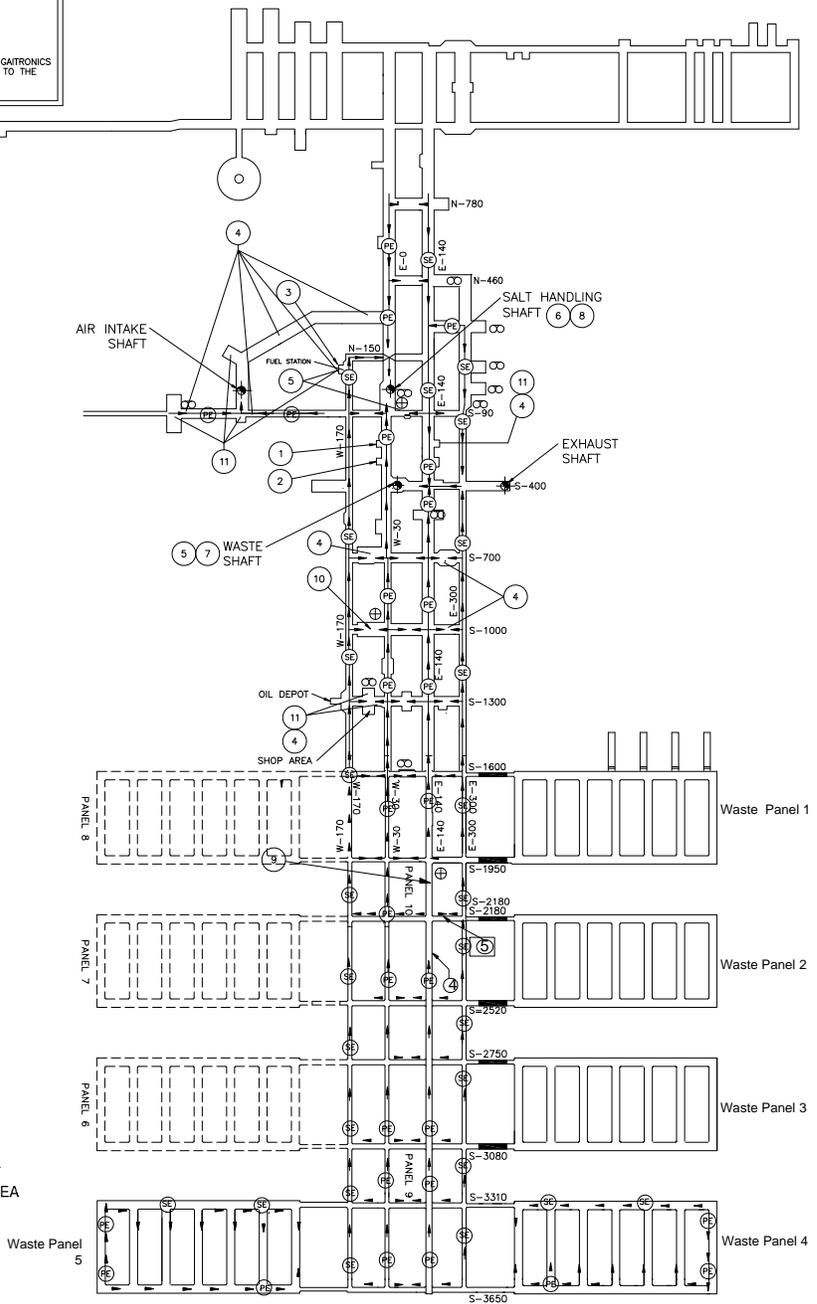

EMERGENCY/ALARM RESPONSE

CONTACT CMR BY MINE PAGER PHONE OR GATRONIC HANDSET OR CMR EXTENSION 8111

IDENTIFY TYPE OF EMERGENCY AND LOCATION

PERSONNEL REPORT TO THE NEAREST EGRESS HOIST STATION FOR UNDERGROUND EVACUATION

PERSONNEL REPORT TO THE NEAREST DESIGNATED ASSEMBLY AREA FOR OTHER SITE EMERGENCIES AND CMR ESCAPE ROUTE INSTRUCTIONS

DURING AN EMERGENCY/ALARM RESPONSE PERSON-IN-CHARGE IS THE U/G FE

Figure F-5
 Underground Emergency Equipment Locations and Underground Evacuation Routes

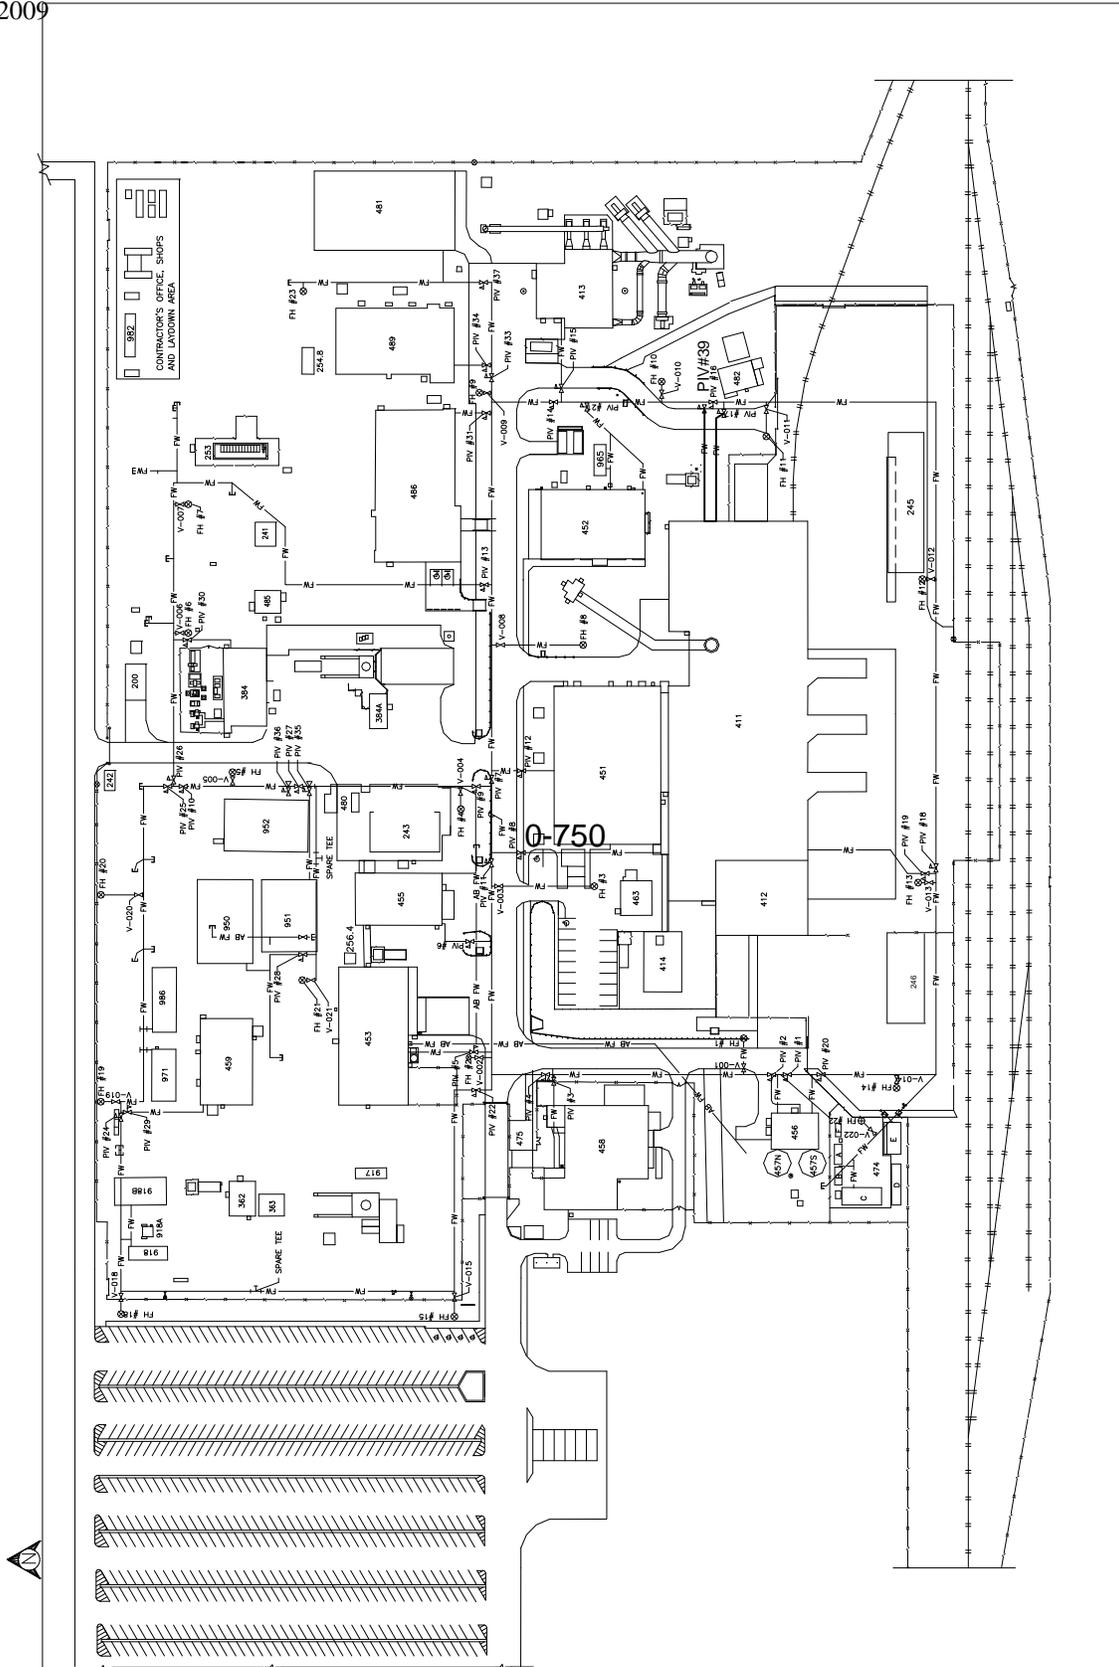


Figure F-6
Fire-Water Distribution System

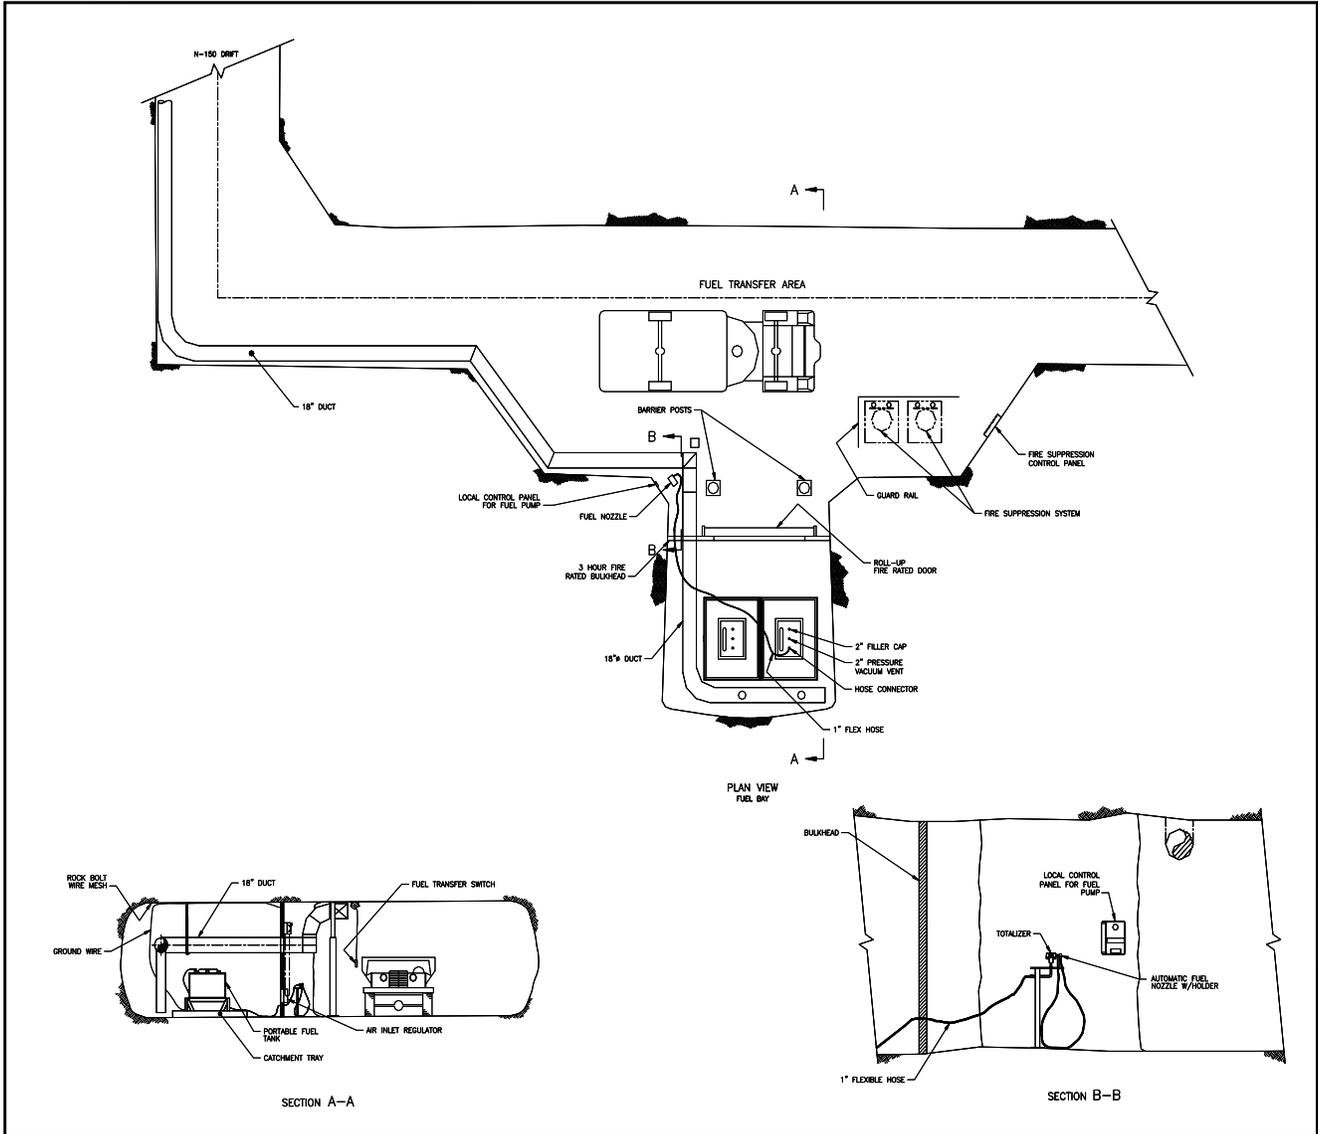


Figure F-7
Underground Diesel Fuel-Station Area Fire Protection System

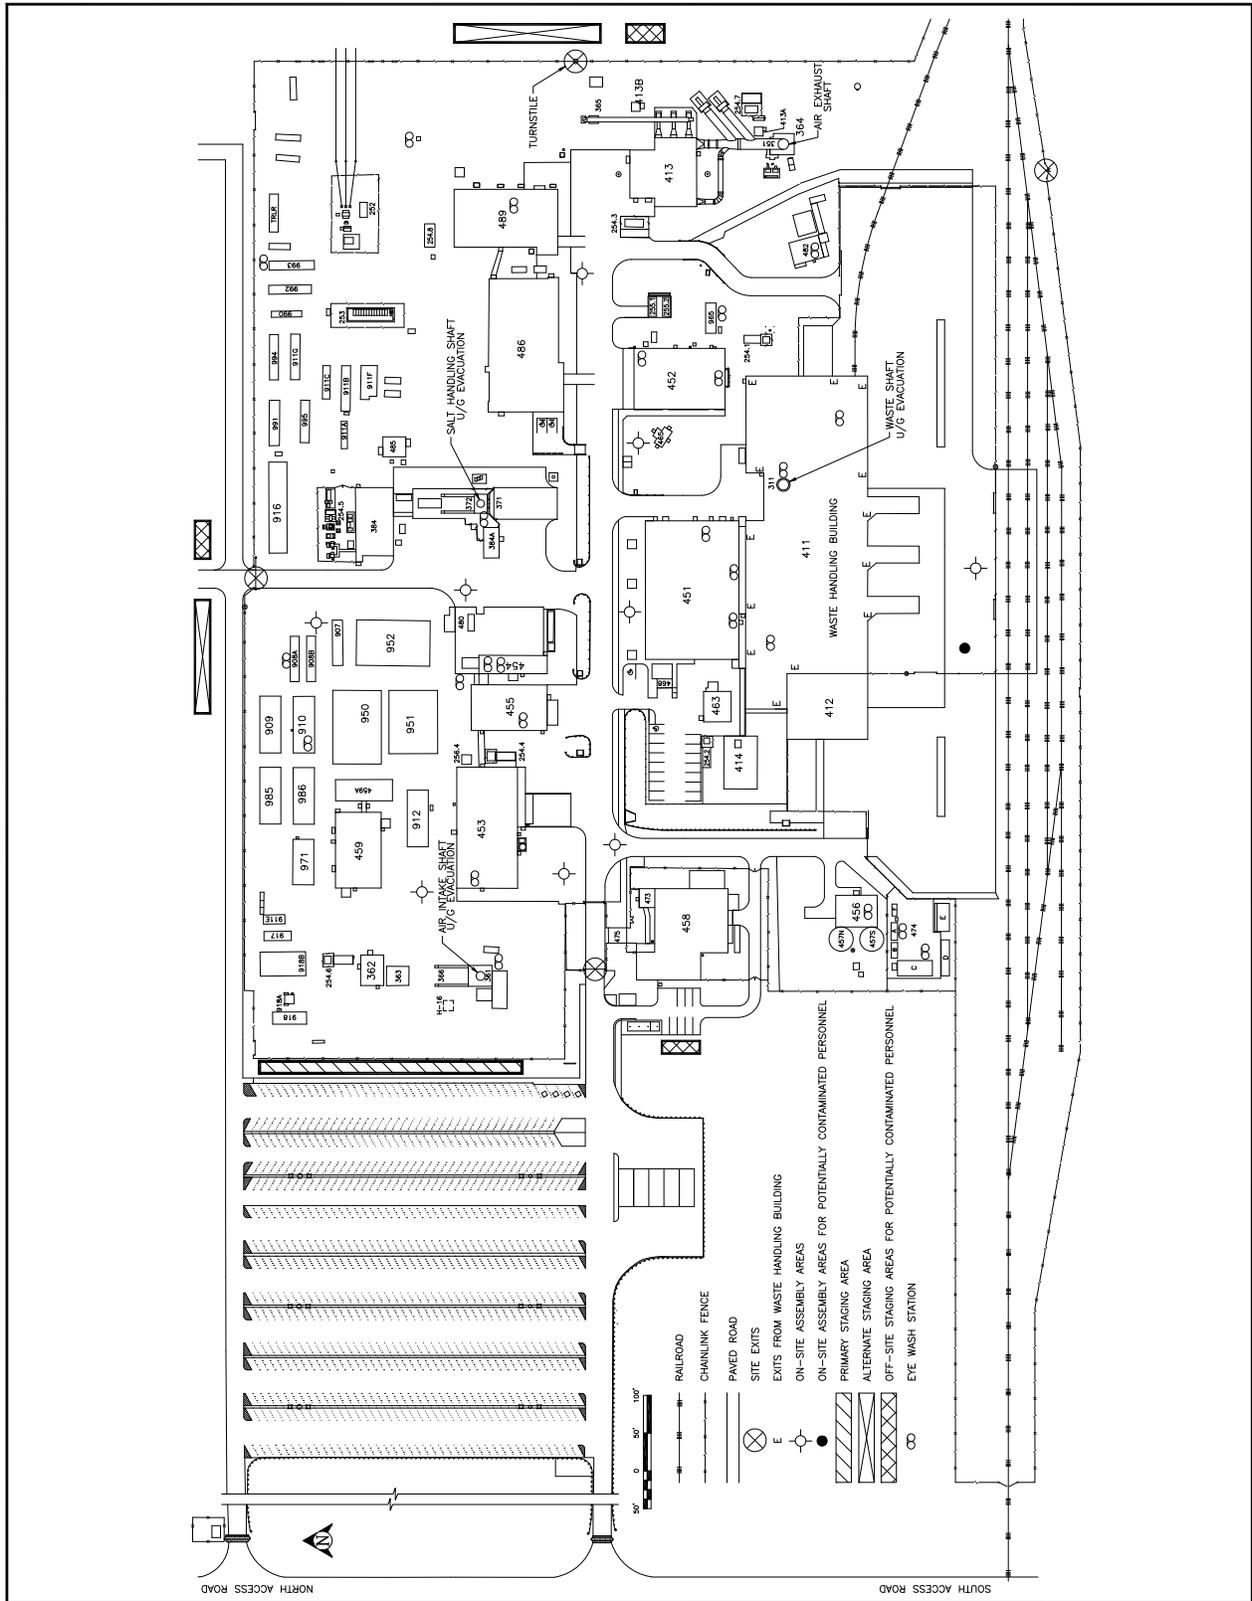


Figure F-8
 WIPP On-Site Assembly Areas and WIPP Staging Areas

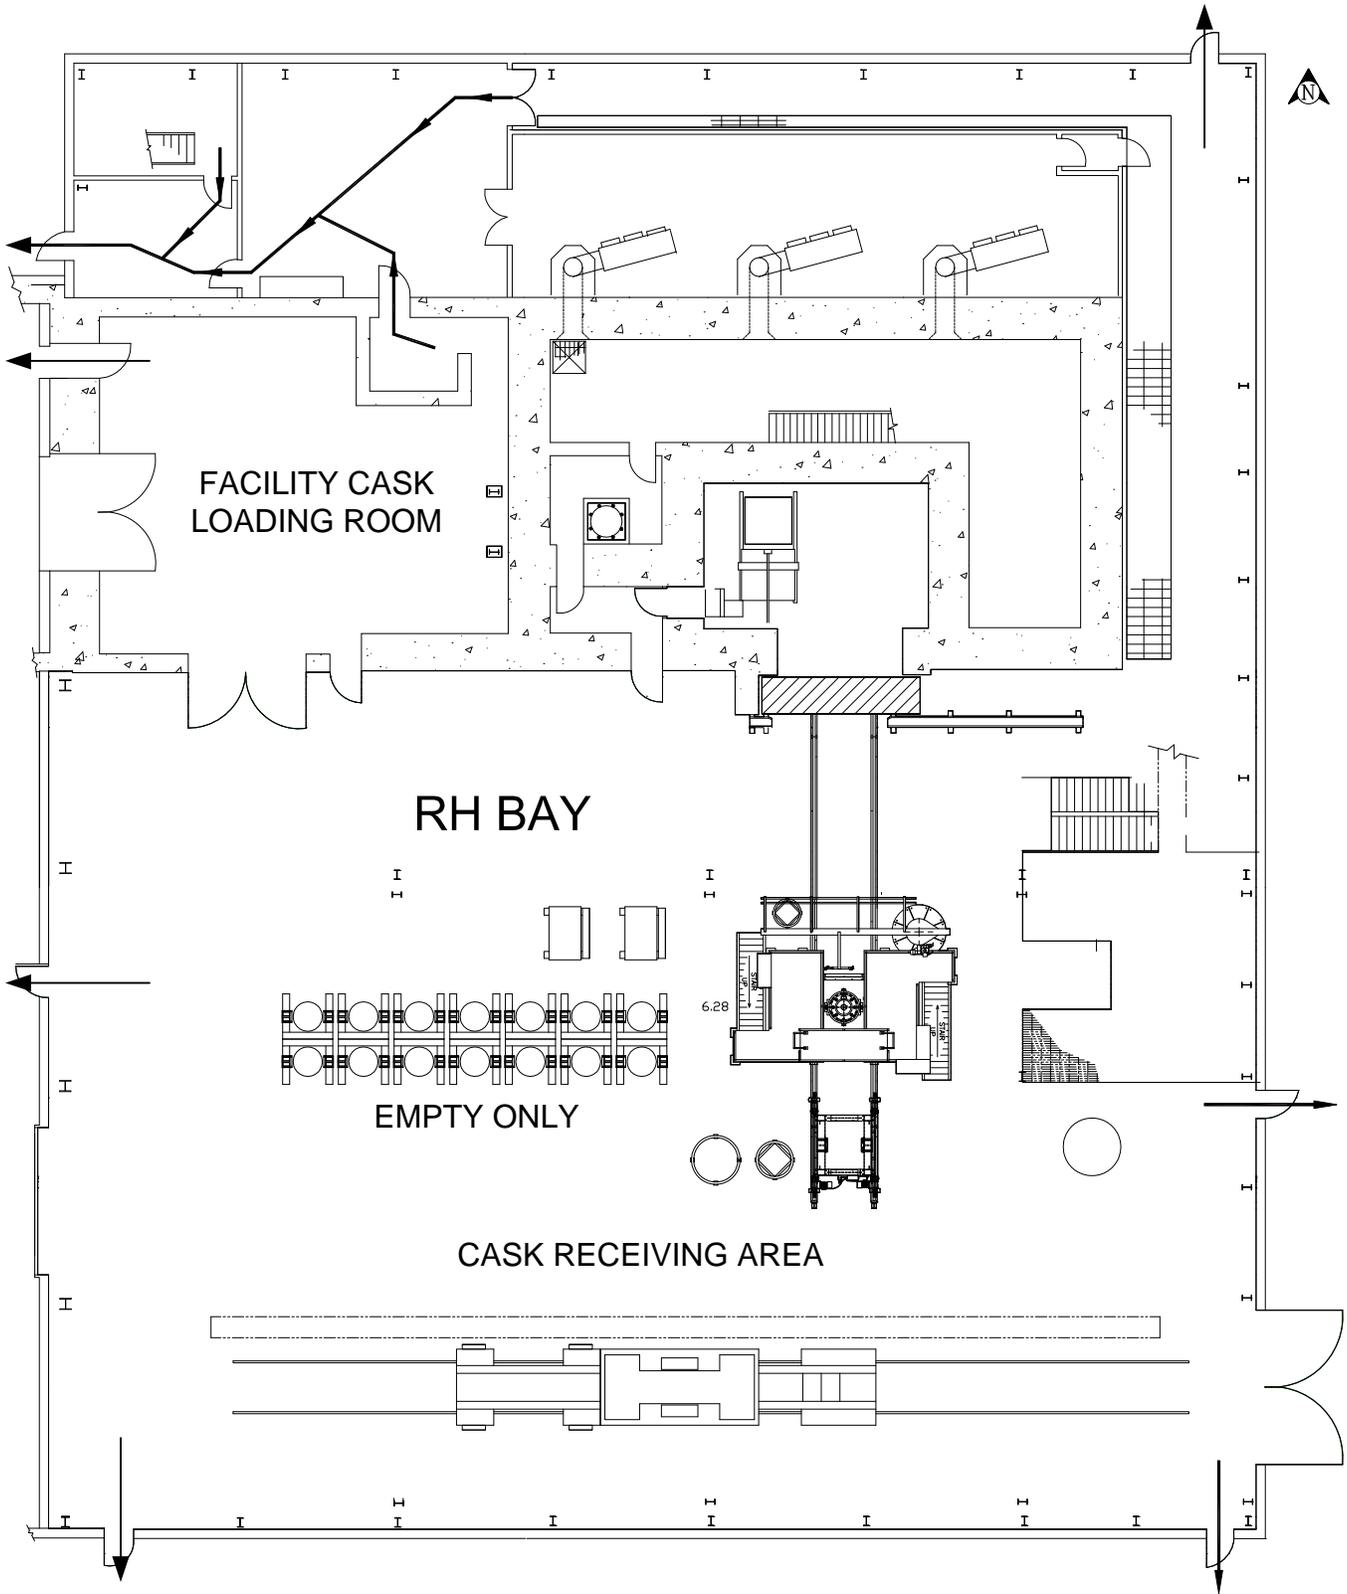


Figure F-8a
RH Bay Evacuation Routes

This Illustration for
Information Purposes Only.

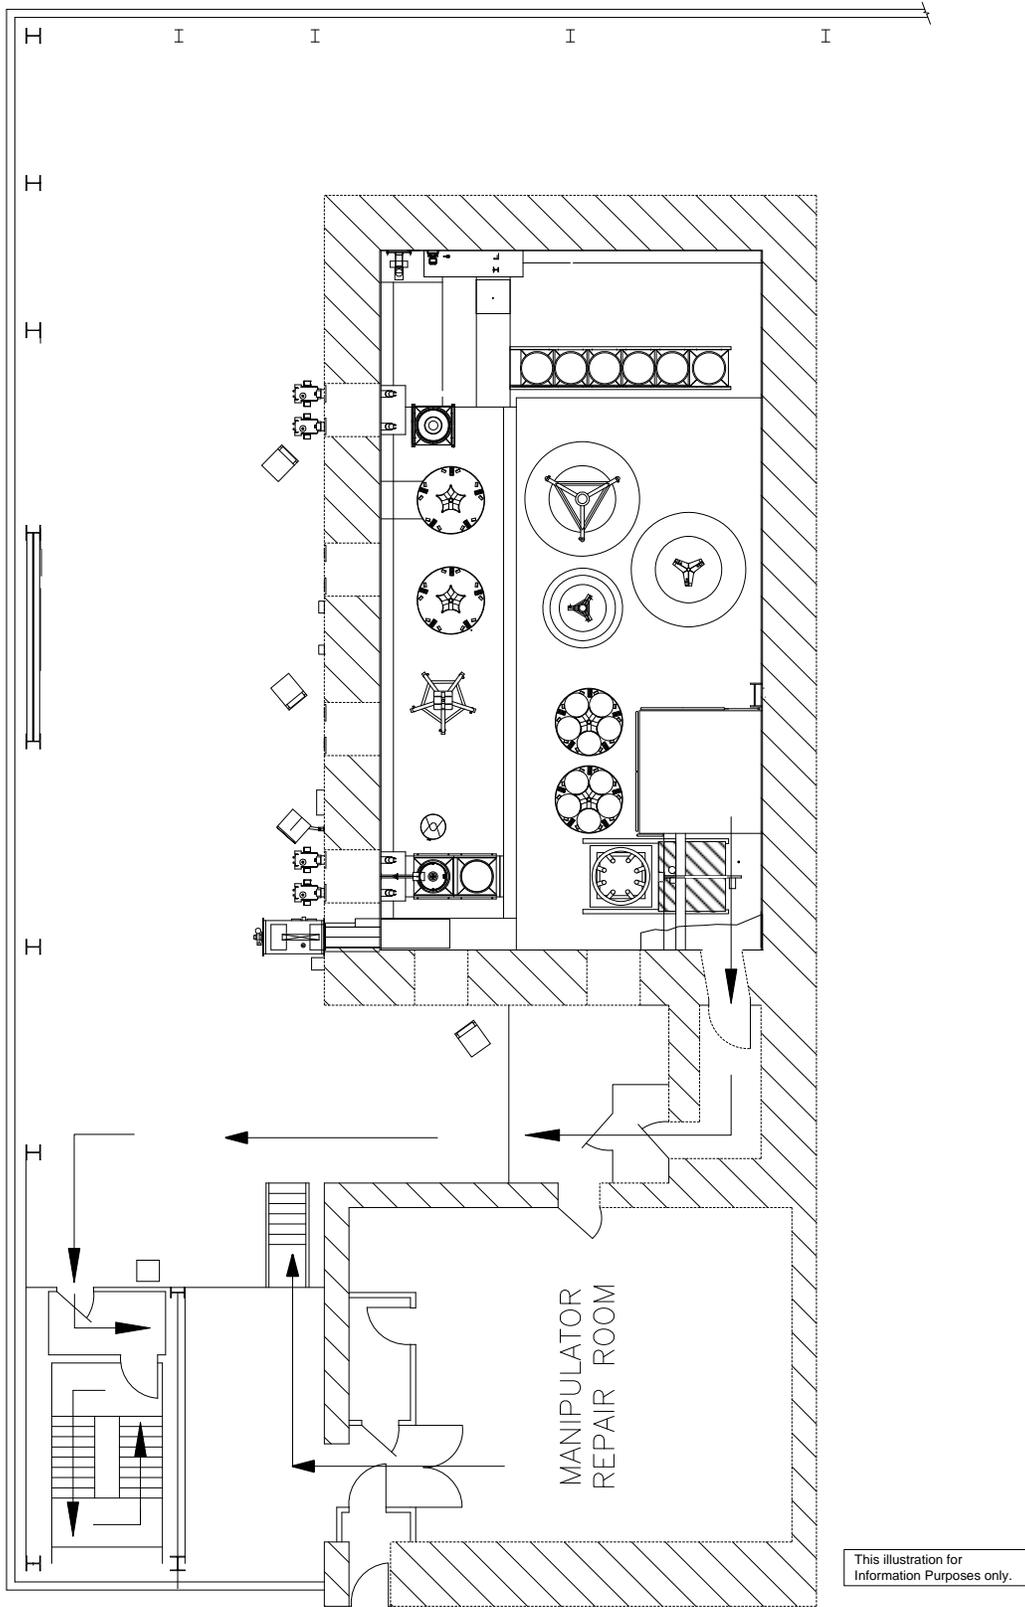


Figure F-8b
RH Bay Hot Cell Evacuation Route

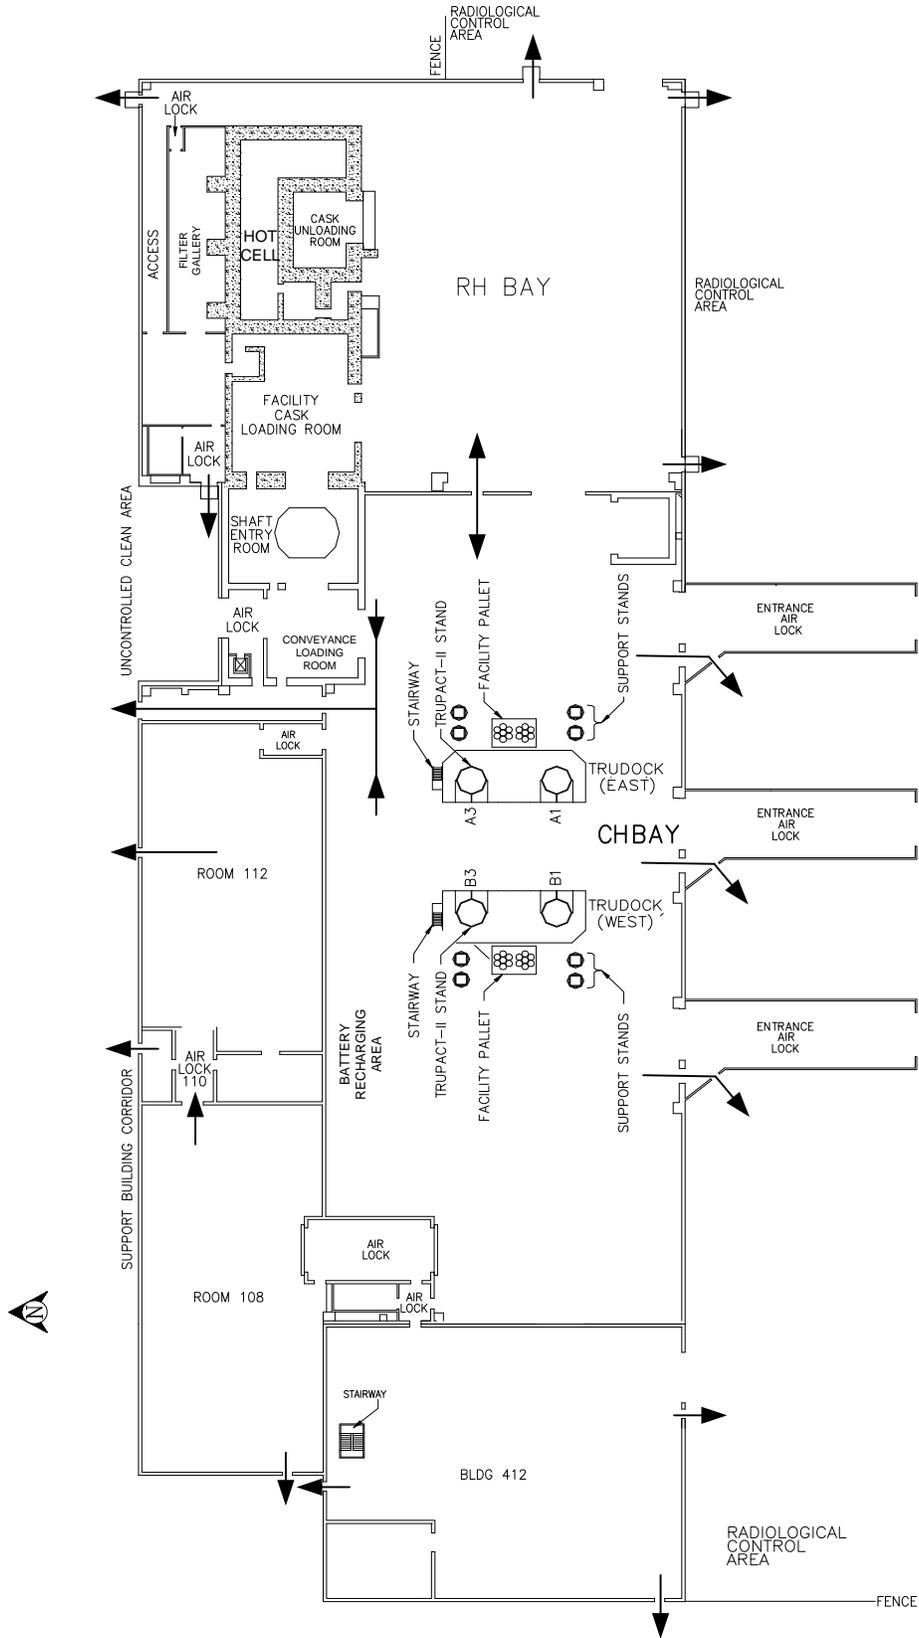


Figure F-8c
Evacuation Routes in Waste Handling Building

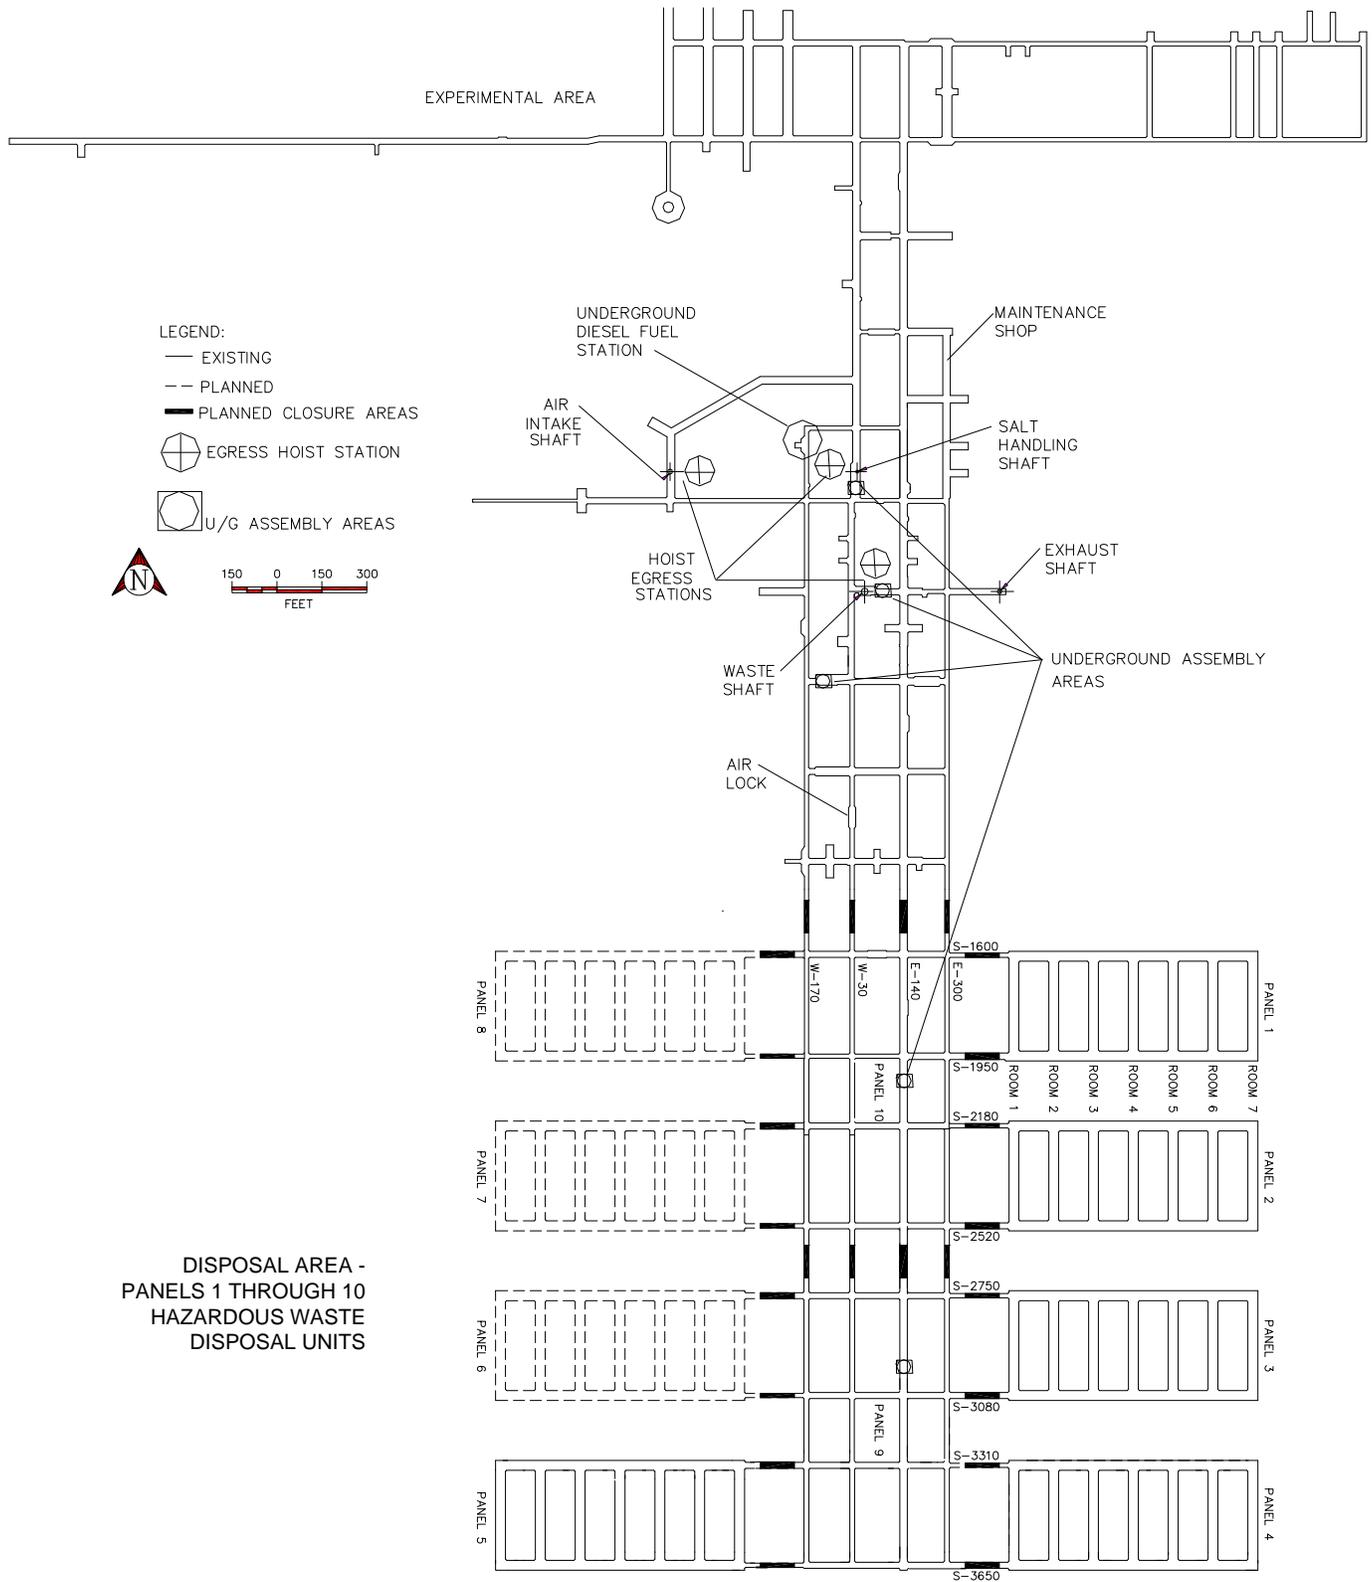


Figure F-9
 Designated Underground Assembly Areas



Pre-Fire Survey

1. Bldg. Name: WASTE HANDLING BUILDING
2. Address: 411 SITE
3. Occ. Type: MAINTENANCE AND OPERATIONS PERSONNEL
4. Map #: 411-1
5. Roof Const.: METAL
6. Floor Const.: CONCRETE
7. Date: 07/27/95
8. Revision Date: 02/10/97
9. Surrounding Bldgs.: 412, 451, 452, 463
10. Fire Hydrants: FH-#8 N, FH-#11 E, FH-#12 S, FH-#13 S,



LEGEND	
	ELECTRICAL PANEL
	FLAMMABLE CABINET
	THERMAL DETECTOR
	NON-SPRINKLERED AREA
	LADDER WITH OVERHEAD WALKWAY
	FIRE CONTROL PANEL
	SMOKE DETECTOR
	SPRINKLER RISER WITH F.D. CONNECTION
	COMP. GAS CYL.
	FENCE


411
 WASTE HANDLING BUILDING
 1ST FLOOR

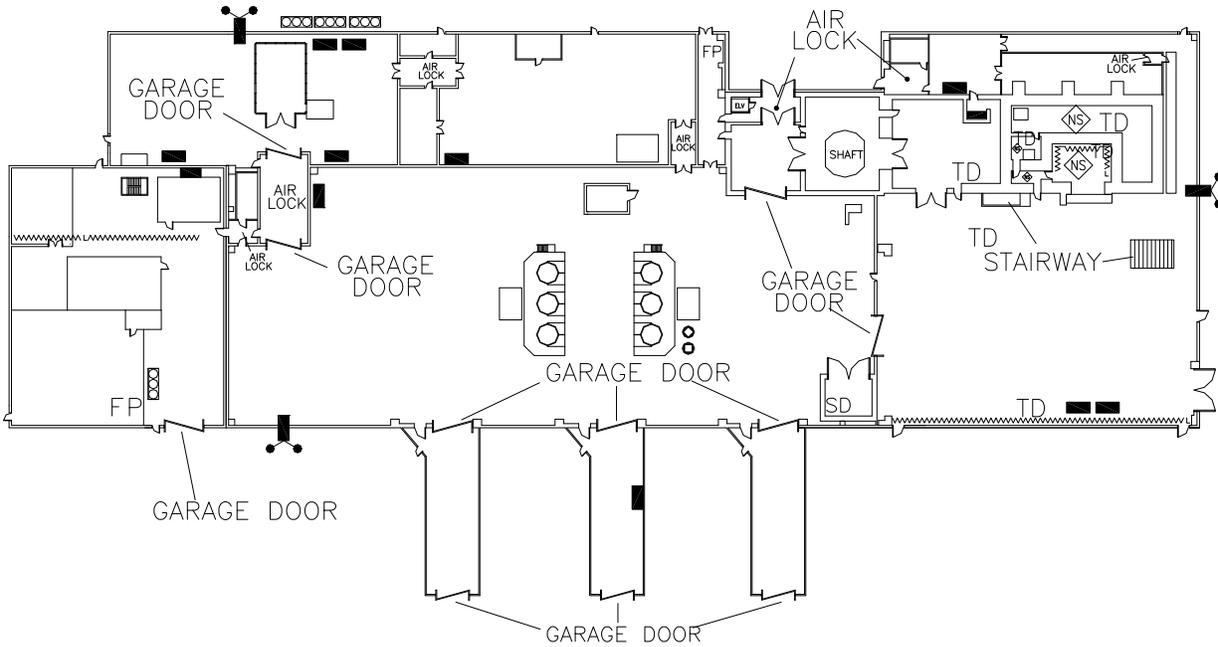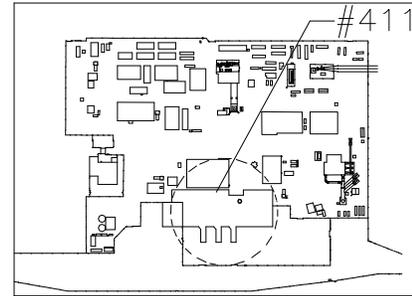

11. Comments: WATER SHUT-OFF AT PIV #8, PIV #17, PIV #19, PIV #38, PIV #39
- _____
- _____
- _____

Figure F-10
 Waste Handling Building Pre-Fire Survey (First Floor)

Pre-Fire Survey Cont.

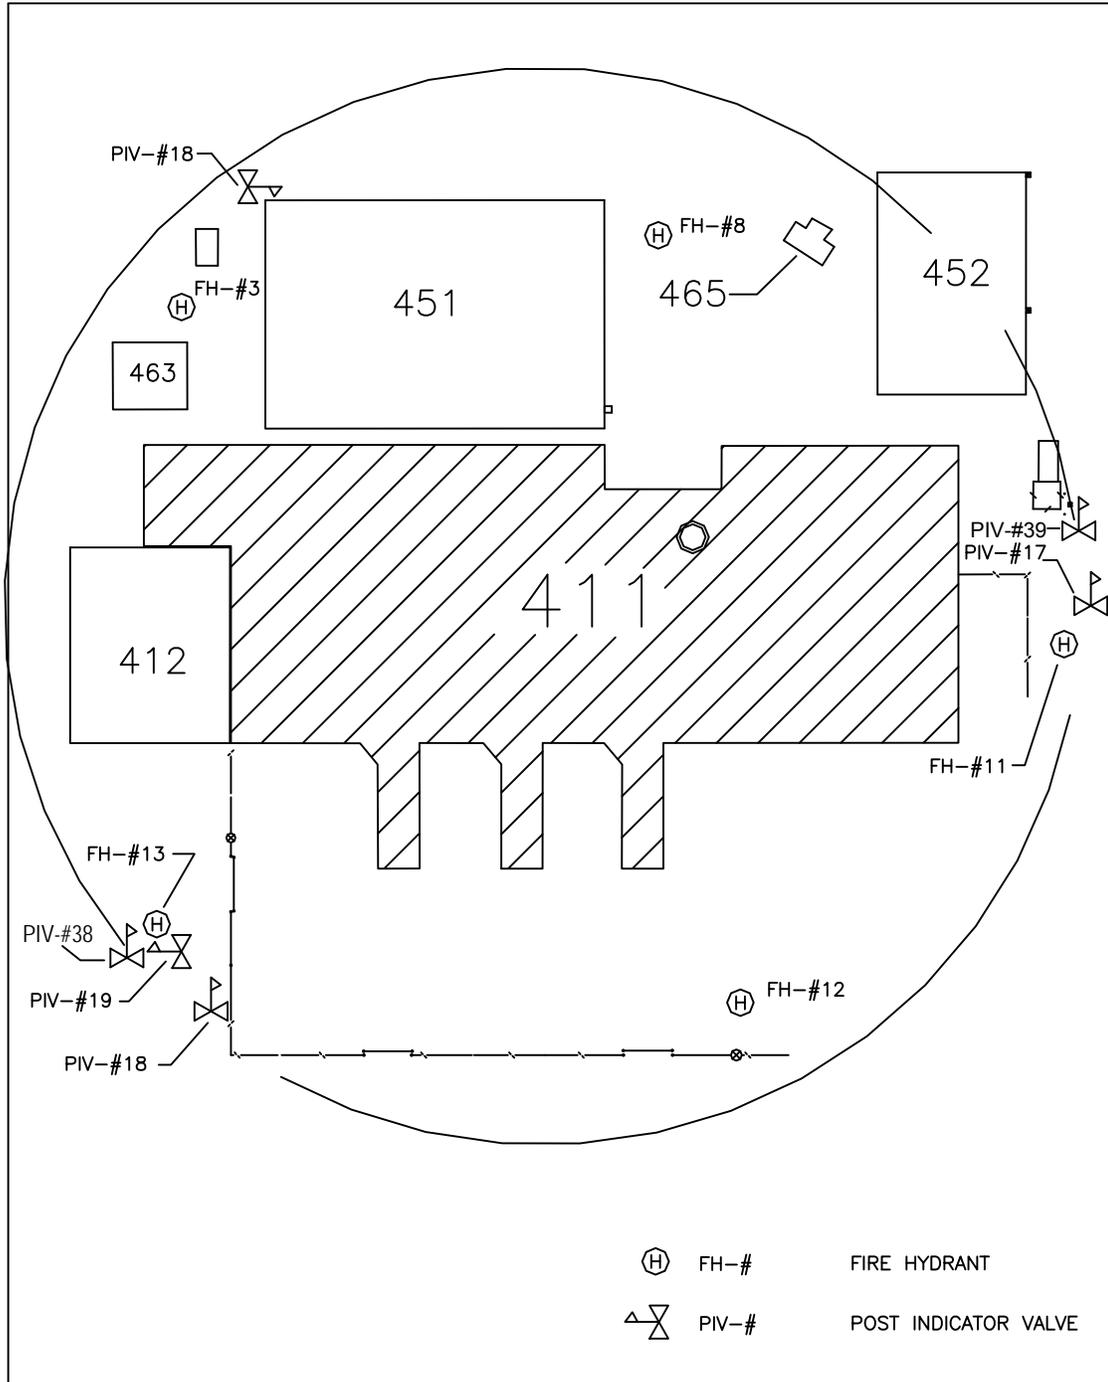

MAP #: 411-1

PAGE 2


REVISION DATE: 1/02/2007

411-1-PFS

Figure F-10a
 Waste Handling Building Pre-Fire Survey (First Floor)

Pre-Fire Survey

- | | |
|---|---|
| 1. Bldg. Name: <u>WASTE HANDLING BUILDING</u> |  |
| 2. Address: <u>411 SITE</u> | |
| 3. Occ. Type: <u>MAINTENANCE AND OPERATIONS PERSONNEL</u> | |
| 4. Map #: <u>411-2</u> | |
| 5. Roof Const.: <u>METAL</u> | |
| 6. Floor Const.: <u>CONCRETE</u> | |
| 7. Date: <u>07/27/95</u> | |
| 8. Revision Date: <u>02/11/97</u> | |
| 9. Surrounding Bldgs.: <u>412, 451, 452, 463</u> | |
| 10. Fire Hydrants: <u>FH-#8 N, FH-#11 E, FH-#12 S, FH-#13 S</u> | |

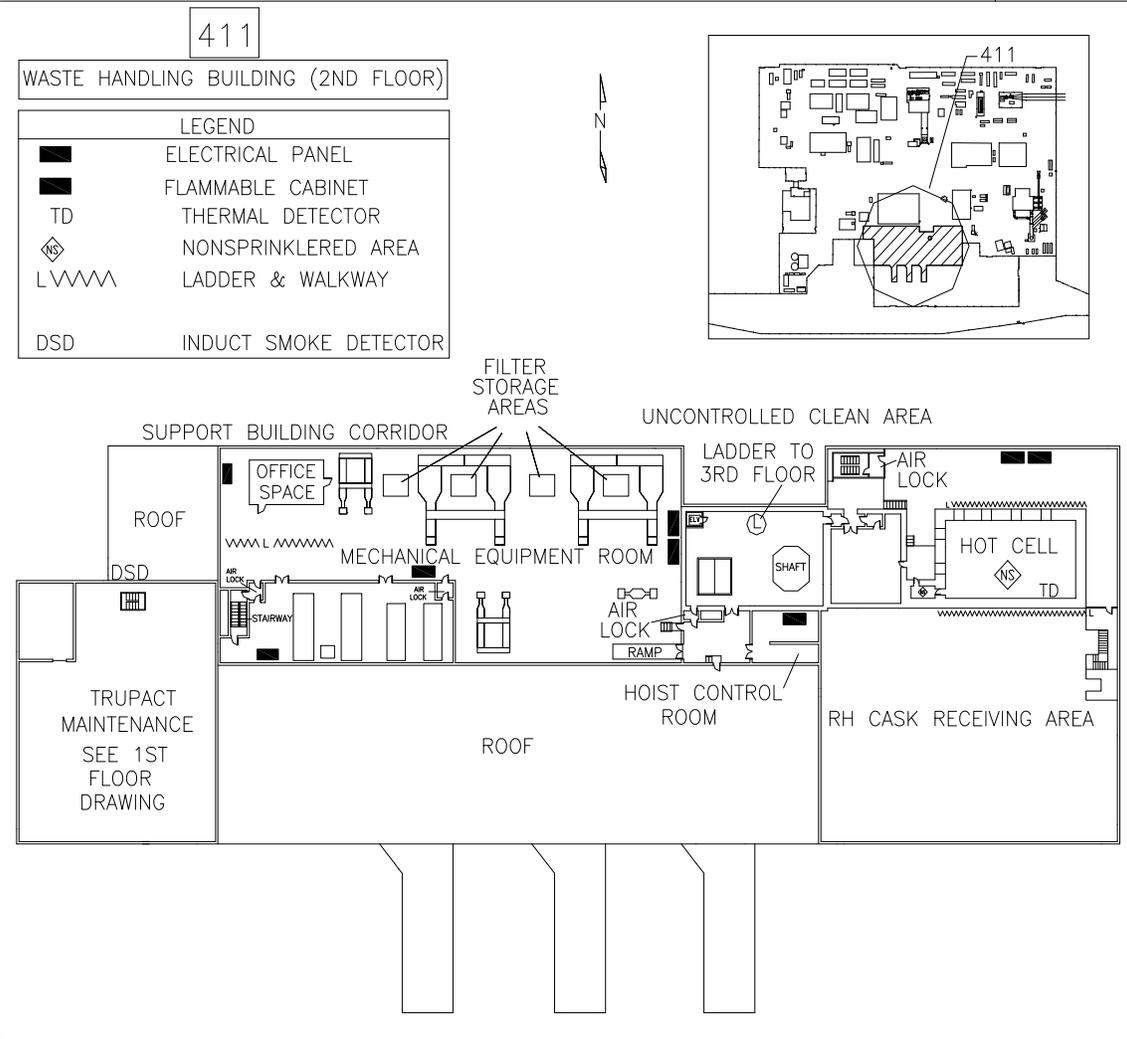

11. Comments: WATER SHUT-OFF AT PIV #8, PIV #17, PIV #19, PIV #38, PIV #39

Figure F-11
 Waste Handling Building Pre-Fire Survey (Second Floor)

Pre-Fire Survey Cont.

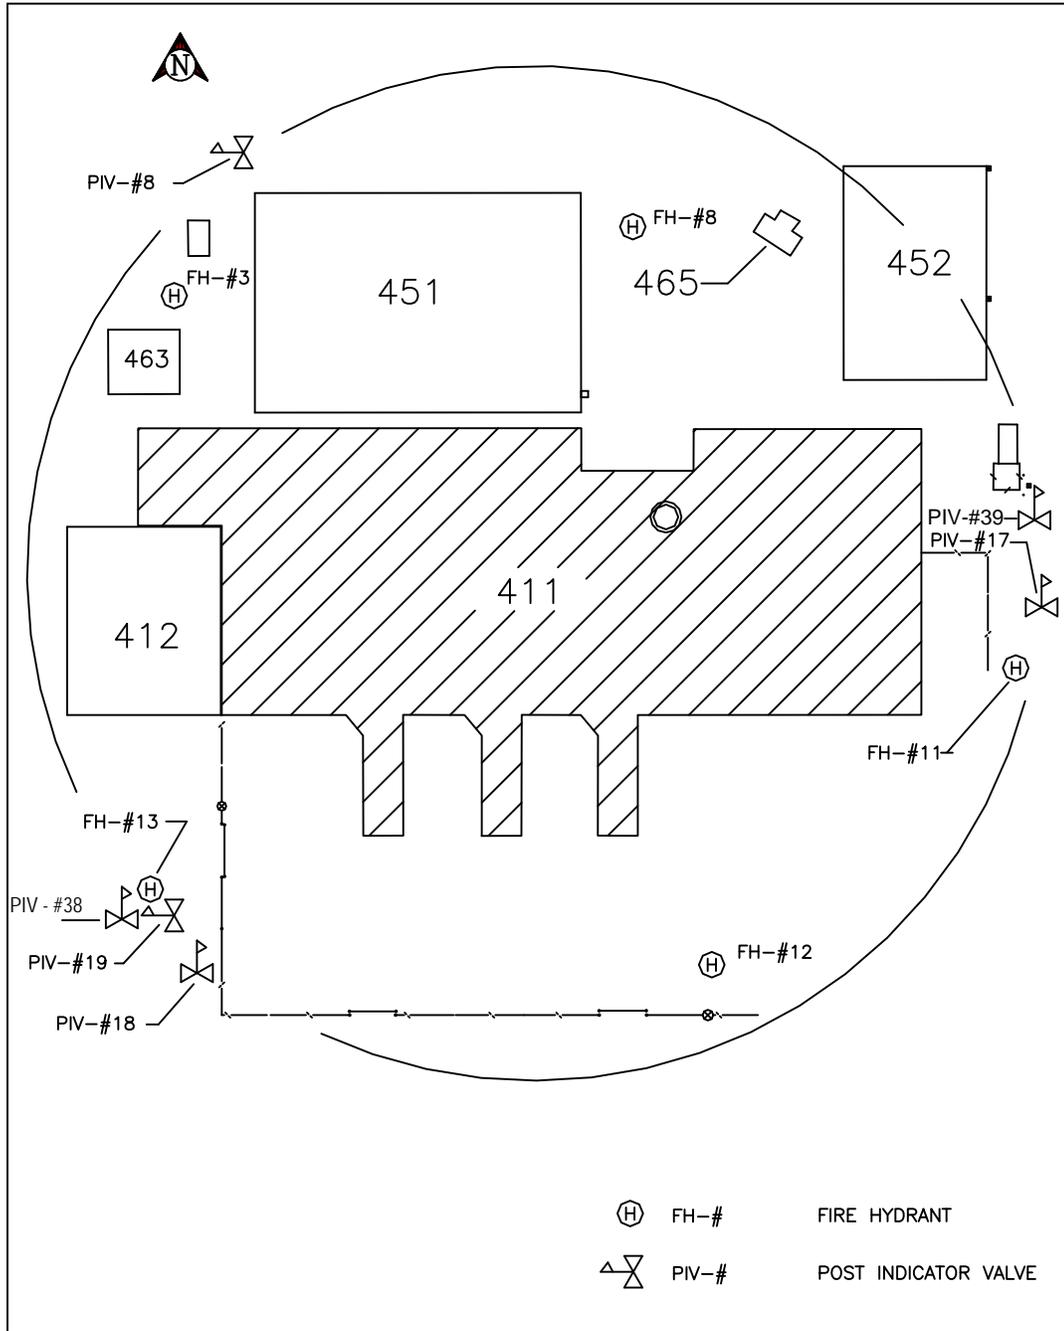


Figure F-11a
Waste Handling Building Pre-Fire Survey (Second Floor)

WIPP HAZARDOUS MATERIAL INCIDENT REPORT				
Date: _____ Location: _____				
I. INITIAL INFORMATION DATE: _____ TIME: _____ EST: _____ REPORTED LOCATION: _____ REPORTED BY: _____ DEPT.: _____ INITIALLY REPORTED TO: _____ DEPT.: _____ RESPONSIBLE MANAGER: _____ DEPT.: _____				
II. WEATHER CONDITIONS WIND DIRECTION _____ WIND SPEED: _____ mph TEMP.: _____ F CONDITIONS (i.e., icy, snowing, raining, cloudy, sunny): _____				
III. TYPE OF INCIDENT (SPILL, LEAK, ETC.): _____ Fire involved: [] YES [] NO (If fire is involved attach a copy of the fire report)				
<u>MATERIALS INVOLVED</u>	<u>UN/NA NO.</u>	<u>QUANTITY</u>	<u>HAZARD CLASS</u>	<u>NFPA CLASS</u>
_____	_____	_____	_____	_____
_____	_____	_____	_____	_____
_____	_____	_____	_____	_____
IV. PERSONNEL INVOLVED IN CLEAN-UP ACTIVITIES				
<u>PERSONNEL/DEPT</u>		<u>DECON METHOD/MEDICAL TREATMENT</u>		
_____	_____	_____	_____	_____
_____	_____	_____	_____	_____
_____	_____	_____	_____	_____
_____	_____	_____	_____	_____
_____	_____	_____	_____	_____
_____	_____	_____	_____	_____
V. PERSONNEL CONTAMINATED NOT INVOLVED IN THE CLEANUP ACTIVITIES				
<u>PERSONNEL/DEPT.</u>	<u>MATERIAL CONTACTED</u>	<u>DECON/MEDICAL TREATMENT</u>		
_____	_____	_____	_____	_____
_____	_____	_____	_____	_____
_____	_____	_____	_____	_____

Figure F-12
 WIPP Hazardous Materials Incident Report, Page 1 of 3

WIPP HAZARDOUS MATERIAL INCIDENT REPORT			
Date: _____		Location: _____	
IX. INITIAL NOTIFICATION BY CMRO			
<u>DEPARTMENT</u>	<u>PERSON CONTACTED</u>	<u>TIME</u>	<u>NOTIFIED BY</u>
Facility Ops (FSM) _____	_____	_____	_____
Emerg. Mgmt (EST) _____	_____	_____	_____
EC _____	_____	_____	_____
Industrial Safety _____	_____	_____	_____
Facility Ops. (FM/FMD) _____	_____	_____	_____
_____	_____	_____	_____
_____	_____	_____	_____
CMRO: _____			
Print name	Signature	Date	
FSM: _____			
Print name	Signature	Date	
X. CONTINGENCY PLAN IMPLEMENTATION			
Contingency Plan implemented []YES []NO			
FSM: _____			
Print name	Signature	Date	
XI. REVIEWS			
Report submitted by: _____			
Print name	Signature	Date	
Emergency Management Manger: _____			
Print name	Signature	Date	
EC Manager: _____			
Print name	Signature	Date	
COMMENTS: _____			

Figure F-12 (Continued)
 WIPP Hazardous Materials Incident Report, Page 3 of 3

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22


(This page intentionally blank)

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22

DRAWINGS

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22

(This page intentionally blank)

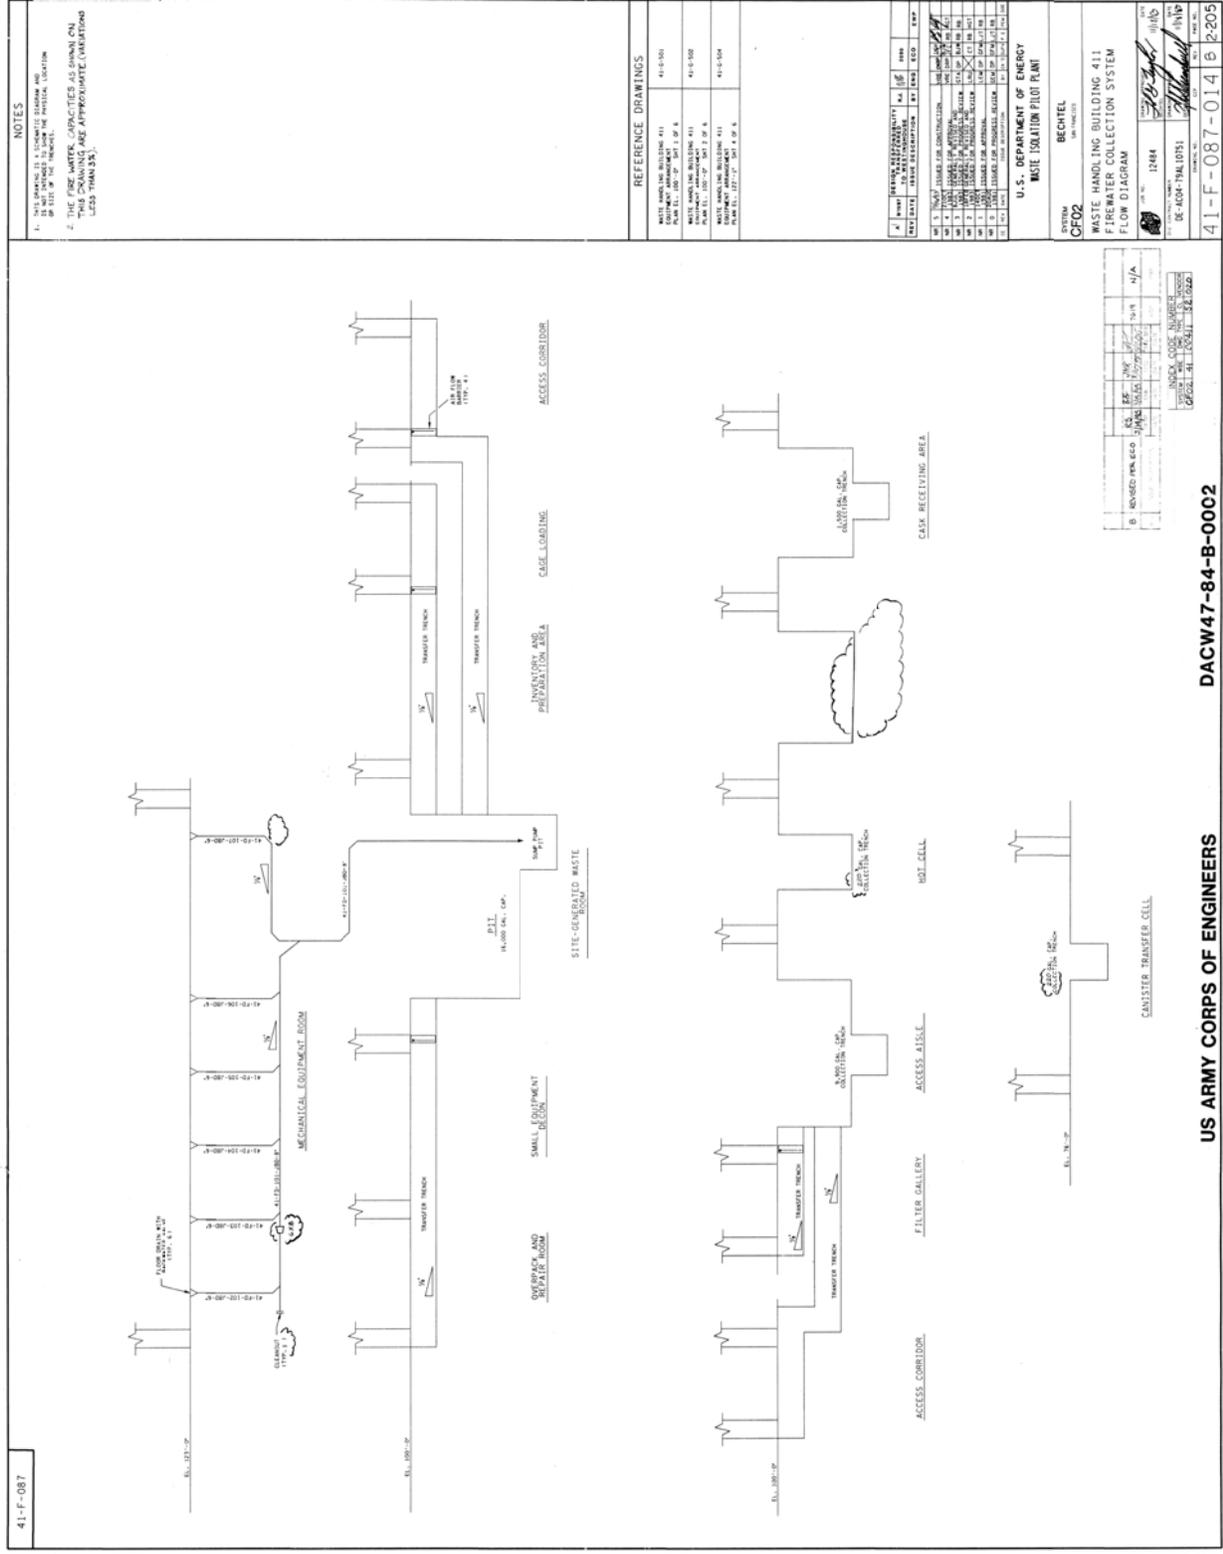

NOTES

- THIS DRAWING IS A CONCEPTUAL SKETCH AND IS NOT TO BE USED FOR CONSTRUCTION.
- THE FIRE WATER CAPACITIES AS SHOWN ON THIS DRAWING ARE APPROXIMATE (VARIATIONS LESS THAN 15%).

REFERENCE DRAWINGS

NO.	DATE	DESCRIPTION	BY	CHKD	APP
1	11-15-08	WASTE HANDLING BUILDING 411 OVERPACK AND REPAIR ROOM
2	11-15-08	WASTE HANDLING BUILDING 411 MECHANICAL EQUIPMENT ROOM
3	11-15-08	WASTE HANDLING BUILDING 411 CLEANING TRENCH

**U.S. DEPARTMENT OF ENERGY
 WASTE ISOLATION PILOT PLANT**

BECHTEL

CF02

WASTE HANDLING BUILDING 411
 FIREWATER COLLECTION SYSTEM
 FLOW DIAGRAM

INDEX CODE NUMBER
 1244

DE-NM-THAL051

41-F-087-014 B P-205

US ARMY CORPS OF ENGINEERS
 DACW47-84-B-0002

41-F-087-014 Waste Handling Building 411 Fire Water Collection System Flow Diagram