

WIPP Subsidence Monument Leveling Survey 2004

December 2004

REVIEWED BY Ben F. Z... DATE 12/21/04

Cognizant Engineer

REVIEWED BY [Signature] DATE 21 Dec 04

Cognizant Manager



Waste Isolation Pilot Plant

Table of Contents

1. Introduction	1
2. Equipment.....	1
3. Office Processing.....	2
4. Methodology	2
5. General Summary of Results.....	4
5.1. Accuracy Summary by Loop.....	5
6. Adjusted Level Loops.....	8
7. Adjusted Elevations (2004)	9
8. Comparison of Elevations	10

List of Tables

Table A. Description of 2004 Leveling Loops.....	4
Table B. Summary of Distance and Accuracy for 2004 Leveling Loops.....	4
Table C. Detailed Loop Measurements.....	6
Table D. Adjusted Elevations by Loop	8
Table E. 2004 Adjusted Elevations	9
Table F. Comparison of Elevations 1987-2004.....	10

List of Figures

Figure 1. Individual Loops, Total Loop, and Underground Excavations	3
---	---

List of Acronyms

DOE	Department of Energy
DOY	Day of year
FGCS	Federal Geodetic Control Subcommittee
M&TE	Measurement and Test Equipment
NGS	National Geodetic Survey
WTS	Washington TRU Solutions
WIPP	Waste Isolation Pilot Plant

References

Classification, Standards of Accuracy, and General Specifications of Geodetic Control Surveys, Federal Geodetic Control Committee (now Federal Geodetic Control Subcommittee), [1975] 1980, Reprint.

FGCS Specifications and Procedures to Incorporate Electronic Digital / Bar-Code Leveling Systems, Federal Geodetic Control Subcommittee, ver. 4.0, dated July 15, 1994.

WP 09-ES4001, *Subsidence Survey Data Acquisition and Report*, June 2002

Subsidence Monitoring Software Quality Assurance Plan, July 2002

WIPP Subsidence Monument Leveling Surveys 1986-1997, DOE / WIPP 98-2293, June 1998.

WIPP Subsidence Monument Leveling Surveys 1998, DOE / WIPP 99-2293, October 1998.

WIPP Subsidence Monument Leveling Surveys 1999, DOE / WIPP 00-2293, October 1999.

WIPP Subsidence Monument Leveling Surveys 2000, DOE / WIPP 01-2293, October 2000

WIPP Subsidence Monument Leveling Surveys 2001, DOE / WIPP 02-2293, October 2001

WIPP Subsidence Monument Leveling Surveys 2002, DOE / WIPP 03-2293, October 2002

WIPP Subsidence Monument Leveling Surveys 2003, DOE / WIPP 04-2293, October 2003

1. Introduction

Sections 2 through 7 of this report define the result of the 2004 leveling survey through the subsidence monuments at the WIPP site. Approximately 15 miles of leveling was completed through nine vertical control loops. The 2004 survey includes the determination of elevation on each of the 48 existing subsidence monuments and the WIPP baseline survey, and 14 of the National Geodetic Survey's (NGS) vertical control points. The field observations were completed during August through November of 2004 by personnel from the Washington TRU Solutions (WTS) Surveying Group, Mine Engineering Department. Additional rod personnel were provided by the Geotechnical Engineering department.

Digital leveling techniques were utilized to achieve better than Second Order Class II loop closures as outlined by the Federal Geodetic Control Subcommittee (FGCS). Because it is important to perform the subsidence survey in exactly the same manner each year, WIPP procedure (WP 09-ES4001) details each step of the survey. Starting with the 2002 survey this procedure has been used to perform the subsidence survey.

Starting with the survey of the year 2001, Loop 1 and redundant survey connections among the various loops were removed from the survey and report. This resulted in a reduction of fieldwork with no loss of accuracy or precision. The redundant connections caused multiple elevations for the same stations. The differences were so slight that they were not used in elevation adjustments for the loops. The redundancy was used to spot gross errors in the field. After several years of surveying these loops it is evident that no gross errors occur that are not also evident in the loop closures.

Finally, Section 8 contains Table F, which summarizes the elevations for all surveys from 1987 through 2004, inclusive. A detailed listing of the 1986 through 1997 surveys is contained in the report, *WIPP Subsidence Monument Leveling Surveys 1986-1997*, DOE/WIPP 98-2293. A reference to the summary reports for each year after 1997 is listed in the reference section of this document.

2. Equipment

The observations were taken with the WILD NA3003 Electronic Digital Level (WIPP M&TE ID# DM0999 and DM1002) manufactured by Leica, and bar coded leveling staffs. The calibration date for DM0999 is valid from February 11, 2003, through February 11, 2005. The calibration for the DM1002 is valid from March 22, 2004, through March 22, 2006. The data were recorded electronically on the Leica GRM10 REC-Module, which plugs directly into the instrument. In addition to the electronic record, a written field log was maintained to record information that is not stored in the electronic record.

3. Office Processing

Each day the data were downloaded from the GRM10 REC-Module to the survey group computer. The original raw data files were maintained intact, and further processing was performed on a copy of the original raw data file.

Listing of the data, and the adjustment of the loops, was completed with the DIGILEV software (version 10.94d) from Leica Canada. The results, as summarized below, were extracted from the output of the DIGILEV software. A Software Quality Assurance Plan was written for the computer programs used in reducing the subsidence survey field notes. DIGILEV was tested, verified and validated. The program was deemed acceptable and is now in the WIPP controlled software list.

4. Methodology

The weather conditions during the observations of the 2004 survey were generally mild with moderate temperatures and light to moderate breezes.

The elevations for the 2004 survey are computed from the adjusted observations based on the elevation of the subsidence monument, S-37 (3,423.874 feet). S-37 is the WIPP monument that is furthest from the influence of the underground excavations, and has been held fixed for all of the subsidence leveling surveys since 1993. The condition of the individual monuments was substantially the same as the previous subsidence survey with three exceptions.

The brass cap of monument PT-31 came loose making it unusable and monuments S-17 and S-18 no longer exist due to construction of the new salt storage/disposal pad.

As in previous years, the subsidence survey was divided into nine loops. Each loop generally takes one day to complete. This allows a loop to be completed in one surveying session and results in a lower probability of error.

For visual reference, Figure 1 shows a graphic display of the individual loops, the total survey, and the relationship to the underground excavations.

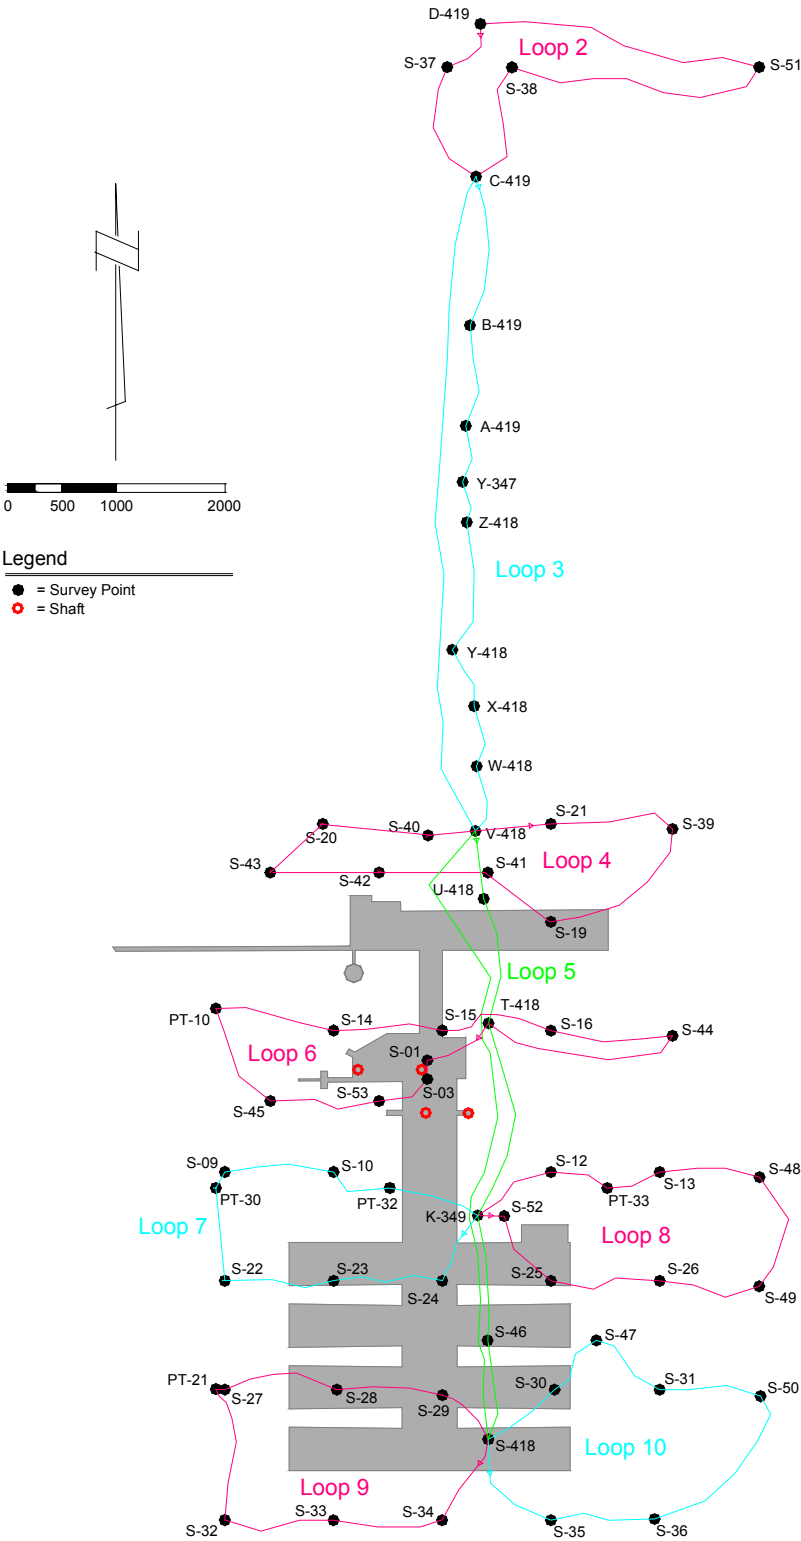


Figure 1. Individual Loops, Total Survey and Underground Excavations

5. General Summary of Results

Table A below describes the nine leveling loops that were measured to obtain the elevations of the subsidence monuments. The table contains the start date of the observations, a loop number, and the points that are contained within the loop.

Table A. Description of 2004 Leveling Loops

Start Date (DOY)	Loop	Points
August 31, 2004 (243)	2	D-419, S-37, C-419, S-38, S-51, D-419
September 17 & 23, 2004 (260 & 266)	3	C-419, B-419, A-419, Y-347, Z-418, Y-418, X-418, W-418, V-418, C-419
October 1, 2004 (274)	4	V-418, S-21, S-39, S-19, S-41, S-42, S-43, S-20, S-40, V-418
September 27, 2004 (270)	5	V-418, U418, T-418, K-349, S-46, S-418, V-418
December 9, 2004 (343)	6	T-418, S-01, S-03, S-53, S-45, PT-10, S-14, S-15, S-16, S-44, T-418
October 12, 2004 (285)	7	K-349, S-24, S-23, S-22, PT-30, S-09, S-10, PT-32, K-349
October 28, 2004 (301)	8	K-349, S-52, S-25, S-26, S-49, S-48, S-13, PT-33, S-12, K-349
December 1, 2004 (335)	9	S-418, S-34, S-33, S-32, PT-21, S-27, S-28, S-29, S-418
November 18, 2004 (322)	10	S-418, S-35, S-36, S-50, S-31, S-47, S-30, S-418

Table B summarizes the results of the leveling loops in terms of vertical closure and accuracy. The requirement for Second Order Class II loop closure accuracy was achieved in all cases.

Table B. Summary of Distance and Accuracy for 2004 Leveling Loops

Loop	Cumulative Distance (ft.)	Vertical Closure (ft.)	Accuracy (ft.√mile)	Allowable Accuracy (ft.√mile)
2	8,361.46	-0.0021	0.002	0.042
3	12,704.10	-0.0009	0.001	0.051
4	8,448.77	0.0061	0.005	0.042
5	13,384.83	-0.0033	0.002	0.053
6	10,012.47	0.0042	0.003	0.045
7	6,699.67	0.0010	0.001	0.037
8	7,170.20	-0.0049	0.004	0.038
9	7,525.99	0.0001	0.000	0.039
10	6,974.18	0.0037	0.003	0.038

5.1 Accuracy Summary by Loop

Table C shows a detailed summary of the observations in the leveling loops for the 2004 survey. All results are shown in feet. The information in the table for each loop includes:

Between each benchmark in the loop:

- The distance leveled between benchmarks along the loop.
- The number of instrument setups between each of the benchmarks.
- The difference in elevation from each benchmark to the next.

For each loop as a whole:

- The cumulative, or total, distance of each loop.
- The vertical closure of the loop.
- The accuracy of leveling.
- Allowable accuracy for each loop.

The accuracy of the leveling is given in terms of feet times the square root of the length of the loop in miles. The actual accuracy of leveling is computed in the DIGILEV software, and is based on the actual vertical closure of the loop. The maximum allowable accuracy is based on the allowable accuracy of a loop as stated in the FGCS specification for digital leveling. The FGCS specification for Second Order Class II loop closure permits a maximum of $8\text{mm}\sqrt{\text{Km}}$ (8mm times the square root of the length of the loop in Km). This converts to $0.033\text{ft}\cdot\sqrt{\text{mile}}$ (0.033 feet times the square root of the length of the loop in miles) when stated in English System. All values indicated in this summary are expressed in feet.

Inspection of the following tables shows that in every case the actual accuracy is well below the maximum allowable accuracy for each loop. The column in each table that is labeled "Difference" is the vertical difference from one point to the next. It is important to note that the vertical difference figures have been rounded, and a slight difference may exist in the vertical closure figure from the algebraic sum of the column.

Table C. Detailed Loop Measurements

Loop 2					Loop 6				
From	To	Distance	Setups	Difference	From	To	Distance	Setups	Difference
D-419	S-37	578.69	4	0.617	T-418	S-01	757.39	4	-7.313
S-37	C-419	1,245.96	8	13.794	S-01	S-03	180.92	2	-0.812
C-419	S-38	1,395.77	10	-7.908	S-03	S-53	540.91	4	-0.077
S-38	S-51	2,350.16	16	7.970	S-53	S-45	1,157.70	6	-8.246
S-51	D-419	2,790.88	16	-14.474	S-45	PT-10	1,201.83	6	7.246
Cumulative Distance:		8,361.46			PT-10	S-14	1,172.43	6	3.643
Vertical Closure:					S-14	S-15	1,037.04	6	1.813
Accuracy of Leveling:		-0.002			S-15	S-16	1,044.64	8	8.140
Allowable Accuracy:		0.002			S-16	S-44	1,177.06	8	6.824
		0.042			S-44	T-418	1,742.55	10	-11.218
Loop 3					Loop 7				
From	To	Distance	Setups	Difference	From	To	Distance	Setups	Difference
C-419	B-419	1,427.83	8	12.190	K-349	S-24	928.80	6	-2.132
B-419	A-419	944.86	6	4.896	S-24	S-23	1,031.44	6	-6.154
A-419	Y-347	540.73	4	0.561	S-23	S-22	1,037.54	6	-8.114
Y-347	Z-418	382.65	2	5.802	S-22	PT-30	891.49	8	5.045
Z-418	Y-418	1,230.21	8	4.010	PT-30	S-09	169.25	2	1.234
Y-418	X-418	576.44	4	-9.118	S-09	S-10	1,207.33	8	8.367
X-418	W-418	577.77	4	-6.699	S-10	PT-32	552.75	4	1.799
W-418	V-418	606.76	4	-12.811	PT-32	K-349	881.07	6	-0.045
V-418	C-419	6416.85	42	1.169	Cumulative Distance:		6,699.67		
Cumulative Distance:		12,704.10			Vertical Closure:		0.001		
Vertical Closure:		-0.001			Accuracy of Leveling:		0.001		
Accuracy of Leveling:		0.001			Allowable Accuracy:		0.037		
Allowable Accuracy:		0.051			Loop 8				
Loop 4					From	To	Distance	Setups	Difference
From	To	Distance	Setups	Difference	K-349	S-52	249.09	2	3.374
V-418	S-21	741.47	4	5.456	S-52	S-25	975.11	6	0.321
S-21	S-39	1,166.42	6	-3.803	S-25	S-26	1,065.58	6	12.048
S-39	S-19	1,449.50	8	-12.024	S-26	S-49	948.10	6	12.750
S-19	S-41	817.34	4	4.772	S-49	S-48	1,016.99	6	0.691
S-41	S-42	1,014.11	4	-2.646	S-48	S-13	955.14	6	-11.001
S-42	S-43	1,059.99	6	-4.440	S-13	PT-33	523.44	4	-2.455
S-43	S-20	729.89	4	10.545	PT-33	S-12	551.61	4	-8.224
S-20	S-40	1,024.93	6	0.090	S-12	K-349	885.14	6	-7.503
S-40	V-418	445.12	4	2.050	Cumulative Distance:		7,170.20		
Cumulative Distance:		8,448.77			Vertical Closure:		-0.005		
Vertical Closure:		0.006			Accuracy of Leveling:		0.004		
Accuracy of Leveling:		0.005			Allowable Accuracy:		0.038		
Allowable Accuracy:		0.042			Loop 5				
Loop 5					From	To	Distance	Setups	Difference
From	To	Distance	Setups	Difference	V-418	U-418	662.18	4	-10.234
V-418	U-418	662.18	4	-10.234	U-418	T-418	1,245.15	6	-9.378
U-418	T-418	1,245.15	6	-9.378	T-418	K-349	2,692.44	14	-12.760
T-418	K-349	2,692.44	14	-12.760	K-349	S-46	1,166.18	6	-4.357
K-349	S-46	1,166.18	6	-4.357	S-46	S-418	956.61	6	1.705
S-46	S-418	956.61	6	1.705	S-418	V-418	6,662.27	38	34.829
S-418	V-418	6,662.27	38	34.829	Cumulative Distance:		13,384.83		
Cumulative Distance:		13,384.83			Vertical Closure:		-0.003		
Vertical Closure:		-0.003			Accuracy of Leveling:		0.002		
Accuracy of Leveling:		0.002			Allowable Accuracy:		0.053		
Allowable Accuracy:		0.053							

Table C continued on next page...

Table C. Detailed Loop Measurements (continued)

Loop 9					Loop 10				
From	To	Distance	Setups	Difference	From	To	Distance	Setups	Difference
S-418	S-34	1,004.80	6	-9.615	S-418	S-35	1,327.72	8	-1.157
S-34	S-33	1,024.86	6	-13.035	S-35	S-36	990.42	6	9.035
S-33	S-32	1,129.56	6	-5.581	S-36	S-50	1,515.11	8	16.327
S-32	PT-21	1,290.20	8	10.435	S-50	S-31	954.14	6	-13.622
PT-21	S-27	234.80	2	3.357	S-31	S-47	746.11	4	-3.106
S-27	S-28	1,062.86	6	6.079	S-47	S-30	611.43	4	-5.216
S-28	S-29	979.00	6	6.686	S-30	S-418	829.25	6	-2.262
S-29	S-418	799.91	6	1.674	Cumulative Distance:		6,974.18		
Cumulative Distance:		7,525.99			Vertical Closure:				0.004
Vertical Closure:				0.000	Accuracy of Leveling:				0.003
Accuracy of Leveling:				0.000	Allowable Accuracy:				0.038
Allowable Accuracy:				0.039					

6. Adjusted Level Loops

Table D is a summary of the adjusted elevations for the nine loops measured in 2004. They have been extracted from the output of the DIGILEV software. These are adjusted elevations within each loop. These final adjusted elevations also appear in Table E

Table D. Adjusted Elevations by Loop

Loop 2		Loop 5		Loop 8	
D-419	3423.257	V-418	3436.499	K-349	3404.127
S-37	3423.874	U-418	3426.265	S-52	3407.501
C-419	3437.668	T-418	3416.887	S-25	3407.822
S-38	3429.761	K-349	3404.127	S-26	3419.870
S-51	3437.730	S-46	3399.770	S-49	3432.620
D-419	3423.257	S-418	3401.670	S-48	3433.311
		V-418	3436.499	S-13	3422.310
Loop 3		Loop 6		Loop 9	
C-419	3437.668	T-418	3416.887	S-418	3401.670
B-419	3449.858	S-01	3409.575	S-34	3392.055
A-419	3454.754	S-03	3408.762	S-33	3379.020
Y-347	3455.315	S-53	3408.686	S-32	3373.439
Z-418	3461.117	S-45	3400.440	PT-21	3383.874
Y-418	3465.126	PT-10	3407.685	S-27	3387.231
X-418	3456.009	S-14	3411.329	S-28	3393.310
W-418	3449.310	S-15	3413.142	S-29	3399.996
V-418	3436.499	S-16	3421.281	S-418	3401.670
C-419	3437.668	S-44	3428.105		
		T-418	3416.887		
Loop 4		Loop 7		Loop 10	
V-418	3436.499	K-349	3404.127	S-418	3401.670
S-21	3441.955	S-24	3401.995	S-35	3400.514
S-39	3438.152	S-23	3395.841	S-36	3409.549
S-19	3426.128	S-22	3387.727	S-50	3425.876
S-41	3430.900	PT-30	3392.772	S-31	3412.254
S-42	3428.254	S-09	3394.006	S-47	3409.149
S-43	3423.814	S-10	3402.373	S-30	3403.932
S-20	3434.359	PT-32	3404.172	S-418	3401.670
S-40	3434.449	K-349	3404.127		
V-418	3436.499				

7. Adjusted Elevations (2004)

Table E shows the adjusted elevations for the subsidence monuments and the NGS points contained within the 2004 survey. These elevations are normalized to the monument, S-37. All elevations are shown in feet, and are within the WIPP local coordinate system.

Table E. 2004 Adjusted Elevations

Point	Elevation (ft.)	Point	Elevation (ft.)
S-01	3409.575	S-42	3428.254
S-03	3408.762	S-43	3423.814
S-09	3394.006	S-44	3428.105
S-10	3402.373	S-45	3400.440
S-12	3411.630	S-46	3399.770
S-13	3422.310	S-47	3409.149
S-14	3411.329	S-48	3433.311
S-15	3413.142	S-49	3432.620
S-16	3421.281	S-50	3425.876
S-17	No longer exists	S-51	3437.730
S-18	No longer exists	S-52	3407.501
S-19	3426.128	S-53	3408.686
S-20	3434.359		
S-21	3441.955	PT-10	3407.685
S-22	3387.727	PT-21	3383.874
S-23	3395.841	PT-31	Monument damaged
S-24	3401.995	PT-32	3404.172
S-25	3407.822	PT-33	3419.855
S-26	3419.870		
S-27	3387.231	S-418	3401.670
S-28	3393.310	T-418	3416.887
S-29	3399.996	U-418	3426.265
S-30	3403.932	V-418	3436.499
S-31	3412.254	W-418	3449.310
S-32	3373.439	X-418	3456.009
S-33	3379.020	Y-347	3455.315
S-34	3392.055	Y-418	3465.126
S-35	3400.514	Z-418	3461.117
S-36	3409.549	A-419	3454.754
S-37	3423.874	B-419	3449.858
S-38	3429.761	C-419	3437.668
S-39	3438.152	D-419	3423.257
S-40	3434.449	K-349	3404.127
S-41	3430.900		

8. Comparison of Elevations*

Table F compares the elevations from all of the subsidence leveling surveys from 1987 through 2004. All elevations are shown in feet.

Table F. Comparison of Elevations 1987-2004

	S-01	S-02	S-03	S-09	S-10	S-11	S-12	S-13	S-14
1987	3,409.738	3,408.219	3,408.914	3,394.056	3,402.466	3,406.437	3,411.790	3,422.428	3,411.500
1989	3,409.719	3,411.907	3,408.900	3,394.046	3,402.459	3,406.408	3,411.739	3,422.413	3,411.483
1992	3,409.695	3,411.904	3,408.875	3,394.053	3,402.440	3,406.372	3,411.727	3,422.412	3,411.439
1993	3,409.616	(1) (2)	3,408.797	3,393.969	3,402.365	(3)	3,411.630	3,422.324	3,411.382
1994	3,409.626		3,408.806	3,393.988	3,402.374		3,411.653	3,422.348	3,411.372
1995	3,409.613		3,408.795	3,393.986	3,402.373		3,411.650	3,422.345	3,411.376
1996	3,409.615		3,408.795	3,393.994	3,402.373		3,411.645	3,422.340	3,411.369
1997	3,409.610		3,408.793	3,394.002	3,402.379		3,411.656	3,422.349	3,411.368
1998	3,409.617		3,408.802	3,394.011	3,402.388		3,411.653	3,422.352	3,411.374
1999	3,409.613		3,408.798	3,394.004	3,402.385		3,411.650	3,422.358	3,411.365
2000	3,409.607		3,408.792	3,394.003	3,402.381		3,411.644	3,422.352	3,411.364
2001	3,409.599		3,408.786	3,394.006	3,402.378		3,411.636	3,422.350	3,411.361
2002	3,409.595		3,408.783	3,394.012	3,402.381		3,411.637	3,422.354	3,411.357
2003	3,409.583		3,408.771	3,394.007	3,402.372		3,411.629	3,422.307	3,411.351
2004	3,409.575		3,408.762	3,394.006	3,402.373		3,411.630	3,422.310	3,411.329

Note: (1) The subsidence monument, S-02 was relocated in 1989.
 (2) The subsidence monument, S-02, no longer exists after the 1992 survey.
 (3) The subsidence monument, S-11, no longer exists after the 1992 survey.

	S-15	S-16	S-17	S-18	S-19	S-20	S-21	S-22	S-23
1987	3,413.291	3,421.378	3,422.519	3,425.010	3,426.235	3,434.464	3,442.030	3,387.786	3,395.914
1989	3,413.291	3,421.341	3,422.482	3,424.974	3,426.217	3,434.452	3,442.005	3,387.795	3,395.970
1992	3,413.263	3,421.331	3,422.469	3,424.964	3,426.223	3,434.364	3,441.956	3,387.788	3,396.028
1993	3,413.185	3,421.256	3,422.404	3,424.859	3,426.136	3,434.332	3,441.919	3,387.701	3,395.853
1994	3,413.188	3,421.261	3,422.402	3,424.852	3,426.134	3,434.339	3,441.932	3,387.732	3,395.886
1995	3,413.189	3,421.261	3,422.418	3,424.864	3,426.143	3,434.342	3,441.936	3,387.727	3,395.877
1996	3,413.182	3,421.263	3,422.419	3,424.860	3,426.138	3,434.345	3,441.935	3,387.727	3,395.885
1997	3,413.178	3,421.268	3,422.431	3,424.864	3,426.141	3,434.346	3,441.937	3,387.738	3,395.889
1998	3,413.184	3,421.271	3,422.436	3,424.869	3,426.150	3,434.355	3,441.946	3,387.744	3,395.887
1999	3,413.177	3,421.275	3,422.435	3,424.865	3,426.152	3,434.362	3,441.959	3,387.729	3,395.873
2000	3,413.172	3,421.278	3,422.440	3,424.864	3,426.140	3,434.362	3,441.956	3,387.727	3,395.861
2001	3,413.167	3,421.277	3,422.434	3,424.858	3,426.138	3,434.363	3,441.956	3,387.728	3,395.857
2002	3,413.159	3,421.275	3,422.434	3,424.855	3,426.132	3,434.361	3,441.950	3,387.731	3,395.857
2003	3,413.152	3,421.279	3,422.430	3,424.849	3,426.117	3,434.350	3,441.939	3,387.728	3,395.850
2004	3,413.142	3,421.281	(4)	(5)	3,426.128	3,434.359	3,441.955	3,387.727	3,395.841

Note: (4) The subsidence monument, S-17, no longer exists after the 2003 survey.
 (5) The subsidence monument, S-18, no longer exists after the 2003 survey.

	S-24	S-25	S-26	S-27	S-28	S-29	S-30	S-31	S-32
1987	3,402.201	3,408.036	3,420.010	3,387.280	3,393.414	3,400.111	3,404.082	3,412.315	3,373.513
1989	3,402.167	3,408.005	3,419.978	3,387.287	3,393.400	3,400.098	3,404.064	3,412.302	3,373.498
1992	3,402.159	3,407.974	3,419.948	3,387.310	3,393.421	3,400.113	3,404.073	3,412.303	3,373.533
1993	3,402.042	3,407.870	3,419.854	3,387.181	3,393.287	3,400.008	3,403.958	3,412.206	3,373.396
1994	3,402.072	3,407.907	3,419.883	3,387.225	3,393.312	3,400.038	3,403.984	3,412.234	3,373.427
1995	3,402.062	3,407.895	3,419.871	3,387.216	3,393.309	3,400.031	3,403.978	3,412.230	3,373.425
1996	3,402.074	3,407.897	3,419.875	3,387.213	3,393.316	3,400.037	3,403.979	3,412.221	3,373.411
1997	3,402.077	3,407.897	3,419.883	3,387.229	3,393.330	3,400.050	3,403.994	3,412.248	3,373.438
1998	3,402.076	3,407.902	3,419.883	3,387.248	3,393.338	3,400.059	3,403.998	3,412.248	3,373.452
1999	3,402.067	3,407.898	3,419.886	3,387.229	3,393.322	3,400.053	3,403.990	3,412.252	3,373.429
2000	3,402.051	3,407.876	3,419.871	3,387.226	3,393.316	3,400.045	3,403.980	3,412.252	3,373.428
2001	3,402.035	3,407.862	3,419.872	3,387.231	3,393.318	3,400.040	3,403.972	3,412.255	3,373.431
2002	3,402.029	3,407.858	3,419.877	3,387.231	3,393.316	3,400.034	3,403.968	3,412.258	3,373.433
2003	3,402.012	3,407.840	3,419.871	3,387.233	3,393.311	3,400.016	3,403.951	3,412.252	3,373.433
2004	3,401.995	3,407.822	3,419.870	3,387.231	3,393.310	3,399.996	3,403.932	3,412.254	3,373.439

Table F continued on next page...

Table F. Comparison of Elevations 1987-2004 (continued)

	S-33	S-34	S-35	S-36	S-37	S-38	S-39	S-40	S-41
1987	3,379.093	3,392.128	3,400.597	3,409.583					
1989	3,379.073	3,392.137	3,400.583	3,409.584	3,423.888	3,429.736			
1992	3,379.090	3,392.138	3,400.591	3,409.605	3,423.874		3,438.146	3,434.469	3,430.931
1993	3,378.975	3,392.026	3,400.478	3,409.504	3,423.874	3,429.736	3,438.110	3,434.430	3,430.888
1994	3,379.006	3,392.042	3,400.490	3,409.518	3,423.874	3,429.740	3,438.115	3,434.425	3,430.888
1995	3,379.009	3,392.042	3,400.495	3,409.520	3,423.874	3,429.739	3,438.124	3,434.437	3,430.899
1996	3,378.992	3,392.028	3,400.483	3,409.501	3,423.874	3,429.744	3,438.118	3,434.436	3,430.891
1997	3,379.019	3,392.057	3,400.516	3,409.533	3,423.874	3,429.745	3,438.127	3,434.444	3,430.894
1998	3,379.028	3,392.066	3,400.516	3,409.539	3,423.874	3,429.750	3,438.134	3,434.442	3,430.901
1999	3,379.011	3,392.056	3,400.507	3,409.539	3,423.874	3,429.751	3,438.149	3,434.445	3,430.900
2000	3,379.012	3,392.053	3,400.505	3,409.541	3,423.874	3,429.754	3,438.145	3,434.445	3,430.902
2001	3,379.014	3,392.057	3,400.509	3,409.546	3,423.874	3,429.756	3,438.145	3,434.436	3,430.898
2002	3,379.017	3,392.060	3,400.513	3,409.550	3,423.874	3,429.757	3,438.142	3,434.437	3,430.897
2003	3,379.016	3,392.057	3,400.511	3,409.546	3,423.874	3,429.760	3,438.130	3,434.425	3,430.892
2004	3,379.020	3,392.055	3,400.514	3,409.549	3,423.874	3,429.761	3,428.152	3,434.449	3,430.900

	S-42	S-43	S-44	S-45	S-46	S-47	S-48	S-49	S-50
1987									
1989									
1992	3,428.279	3,423.849	3,428.146	3,400.501	3,399.946	3,409.236	3,433.308	3,432.635	3,425.868
1993	3,428.230	3,423.813	3,428.070	3,400.406	3,399.837	3,409.133	3,433.238	3,432.572	3,425.809
1994	3,428.228	3,423.820	3,428.066	3,400.419	3,399.865	3,409.163	3,433.264	3,432.596	3,425.830
1995	3,428.238	3,423.826	3,428.071	3,400.424	3,399.856	3,409.158	3,433.258	3,432.588	3,425.830
1996	3,428.238	3,423.823	3,428.078	3,400.423	3,399.856	3,409.157	3,433.256	3,432.585	3,425.816
1997	3,428.249	3,423.815	3,428.084	3,400.428	3,399.877	3,409.181	3,433.274	3,432.600	3,425.846
1998	3,428.252	3,423.822	3,428.086	3,400.440	3,399.876	3,409.178	3,433.276	3,432.598	3,425.838
1999	3,428.255	3,423.825	3,428.091	3,400.435	3,399.866	3,409.176	3,433.289	3,432.611	3,425.851
2000	3,428.254	3,423.820	3,428.095	3,400.434	3,399.842	3,409.168	3,433.288	3,432.606	3,425.854
2001	3,428.247	3,423.818	3,428.094	3,400.433	3,399.824	3,409.163	3,433.290	3,432.606	3,425.858
2002	3,428.246	3,423.815	3,428.097	3,400.435	3,399.818	3,409.160	3,433.297	3,432.613	3,425.863
2003	3,428.236	3,423.805	3,428.090	3,400.430	3,399.790	3,409.147	3,433.294	3,432.610	3,425.857
2004	3,428.254	3,423.814	3,428.105	3,400.440	3,399.770	3,409.149	3,433.311	3,432.620	3,425.876

	S-51	S-52	S-53	S-54	PT-10	PT-21	PT-30	PT-31	PT-32
1987									
1989									
1992	3,437.765	3,407.611	3,408.775	3,411.085	3,407.722		3,392.914	3,385.117	3,404.370
1993	3,437.746	3,407.523	3,408.670	(6)	3,407.664	3,383.821	3,392.823	3,385.027	3,404.296
1994	3,437.749	3,407.542	3,408.709		3,407.672	3,383.868	3,392.843	3,385.051	3,404.311
1995	3,437.746	3,407.542	3,408.702		3,407.671	3,383.862	3,392.844	3,385.050	3,404.322
1996	3,437.729	3,407.536	3,408.704		3,407.669	3,383.858	3,392.852	3,385.053	3,404.312
1997	3,437.725	3,407.544	3,408.702		3,407.675	3,383.874	3,392.857	3,385.063	3,404.321
1998	3,437.724	3,407.549	3,408.714		3,407.687	3,383.887	(7)	3,385.067	3,404.322
1999	3,437.729	3,407.544	3,408.709		3,407.689	3,383.868		3,385.053	3,404.315
2000	3,437.729	3,407.531	3,408.704		3,407.685	3,383.868		3,385.053	3,404.306
2001	3,437.731	3,407.522	3,408.701		3,407.687	3,383.874		3,385.053	3,404.259
2002	3,437.733	3,407.521	3,408.700		3,407.688	3,383.871		3,385.057	3,404.250
2003	3,437.731	3,407.507	3,408.690		3,407.685	3,383.874		3,385.054	3,404.234
2004	3,437.730	3,407.501	3,408.686		3,407.685	3,383.874		(8)	3,404.172

Note: (6) The subsidence monument, S-54, no longer exists after the 1992 survey.
(7) The monument, PT-30, has been physically disturbed and was removed from the 1998 survey.
(8) The monument, PT-31, has been physically disturbed and was removed from the 2004 survey.

Table F continued on next page...

Table F. Comparison of Elevations 1987-2004 (continued)

	PT-33	S-418	T-418	U-418	V-418	W-418	X-418	Y-347	Y-418
1987									
1989									
1992	3,419.939								
1993	3,419.853								
1994	3,419.884								
1995	3,419.869								
1996	3,419.865	3,401.696	3,416.902	3,426.267	3,436.481	3,449.276	3,455.969	3,455.274	3,465.080
1997	3,419.873	3,401.708	3,416.906	3,426.272	3,436.487	3,449.282	3,455.976	3,455.281	3,465.091
1998	3,419.879	3,401.715	3,416.915	3,426.279	3,436.497	3,449.292	3,455.987	3,455.291	3,465.101
1999	3,419.880	3,401.707	3,416.913	3,426.275	3,436.500	3,449.304	3,456.000	3,455.304	3,465.117
2000	3,419.872	3,401.702	3,416.911	3,426.273	3,436.502	3,449.307	3,456.005	3,455.309	3,465.123
2001	3,419.866	3,401.702	3,416.905	3,426.270	3,436.502	3,449.310	3,456.007	3,455.312	3,465.125
2002	3,419.868	3,401.701	3,416.901	3,426.269	3,436.502	3,449.311	3,456.009	3,455.314	3,465.126
2003	3,419.866	3,401.685	3,416.892	3,426.264	3,436.500	3,449.308	3,456.007	3,455.312	3,465.125
2004	3,419.855	3,401.670	3,416.887	3,426.265	3,436.499	3,449.310	3,456.009	3,455.315	3,465.126

	Z-418	A-419	B-419	C-419	D-419	K-349			
1987									
1989									
1992									
1993									
1994									
1995									
1996	3,461.073	3,454.714	3,449.825	3,437.633	3,423.234	3,404.152			
1997	3,461.082	3,454.720	3,449.829	3,437.642	3,423.238	3,404.162			
1998	3,461.091	3,454.730	3,449.835	3,437.648	3,423.242	3,404.173			
1999	3,461.105	3,454.744	3,449.848	3,437.657	3,423.247	3,404.169			
2000	3,461.109	3,454.749	3,449.853	3,437.660	3,423.250	3,404.157			
2001	3,461.111	3,454.752	3,449.856	3,437.663	3,423.254	3,404.152			
2002	3,461.113	3,454.754	3,449.857	3,437.665	3,423.256	3,404.150			
2003	3,461.112	3,454.752	3,449.856	3,437.665	3,423.256	3,404.137			
2004	3,461.117	3,454.754	3,449.858	3,437.668	3,423.257	3,404.127			

* The 1986 elevations that appear in all reports prior to the 2001 report are from a report filed by Jerry Williams (3/89), Geoscience Dept. Those elevations were, in turn, taken from the 1987 data, rounded to two decimal places and referenced as 1986. When this was discovered it was decided to remove the 1986 information from all subsequent reports.