RENEWAL APPLICATION
CHAPTER G

TRAFFIC PATTERNS

1 (This page intentionally blank)

RENEWAL APPLICATION
CHAPTER G

TRAFFIC PATTERNS

TABLE OF CONTENTS

List of Tables

List of Figures

RENEWAL APPLICATION
CHAPTER G

TRAFFIC PATTERN

G-1 Traffic Information and Traffic Patterns

Access to the Waste Isolation Pilot Plant (**WIPP**) facility is provided by two access roads that connect with U.S. Highway 62/180, 13 mi (21 km) to the north, and NM Highway 128 (Jal Highway), 4 mi (6.4 km) to the south (Figure G-1). The ~~northern access road~~ North Access Road, which connects the site to U.S. Highway 62/180, is an access road built specifically for the Permittees that will be used to transport transuranic (**TRU**) mixed waste from ~~the highway~~ US Highway 62/180 to the WIPP facility ~~site~~. The ~~southern access road~~ South Access Road is a county highway maintained by Eddy County. Signs and pavement markings are located in accordance with the Uniform Traffic Control Devices Manual. Access-road design designation parameters, such as traffic volume, are presented in Table G-1.

G-2 Facility Access and Traffic

Access to the facility for personnel, visitors, and trucks carrying supplies and TRU mixed waste is provided through a security checkpoint (vehicle trap). After passing through the security checkpoint, TRU mixed waste transport trucks will normally turn right (south) before reaching the Support Building and then left (east) to park in the parking area Hazardous Waste Management Unit (**HWMU**) just east of the air locks (Figure G-2). Outgoing trucks depart the same way they arrived, normally out of the west end of the parking area, north through the fence gate and out through the vehicle trap. An alternate inbound route is to continue straight ahead from the security checkpoint to the second road and to turn south to enter the truck parking area. The alternate outbound route is also the reverse of this route. Salt transport trucks, which remove mined salt from the Salt Handling Shaft area, will not cross paths with TRU mixed waste transporters; instead, they will proceed from the Salt Handling Shaft northward to the salt pile. Figure G-2 shows surface traffic flow at the WIPP facility.

The site speed limit for motor vehicles is 10 mph (16 kph) and 5 mph (8 kph) for rail movements. Speed limits are clearly posted at the entrance to the site and enforced by security officers. There are no traffic signals. Stop signs are located at the major intersections of roadways with the main east-west road. Safety requirements are communicated to all site personnel via General Employee Training within 30 days of their employment. Employee access to on-site facilities requires an annual refresher course to reinforce the safety requirements. Security officers monitor vehicular traffic for compliance with site restrictions, and provide instructions to off-site delivery shipments. Vehicular traffic other than the waste transporters use the same roads, but there will be no interference because there are two lanes available on the primary and alternate routes for waste shipments. Pedestrian traffic is limited to the sidewalks and prominently marked crosswalks. Site traffic is composed mostly of pickup trucks and electric carts with a frequency of perhaps 10 per hour at peak periods. Emergency vehicles are

exercised periodically for maintenance and personnel training, with an average frequency of one each per day. They are used for their intended purpose on an as-required basis.

The traffic circulation system is designed in accordance with American Association of State Highway and Transportation Officials (**AASHTO**) Site Planning Guides for lane widths, lateral clearance to fixed objects, minimum pavement edge radii, and other geometric features. Objects in or near the roadway are prominently marked.

On-site roads, sidewalks, and paved areas are used for the distribution and storage of vehicles and personnel and are designed to handle all traffic generated by employees, visitors, TRU mixed waste shipments, and movements of operational and maintenance vehicles. The facility entrance and TRU mixed waste haul roads are designed for 32,000 lbs (AASHTO H20-S16) wheel loading. Service roads are designed for 16,000 lbs (AASHTO H10) wheel loading. Access and on-site paved roads are designed to bear the anticipated maximum load of 115,000 lbs (52,163.1 kg), the maximum allowable weight of a truck/trailer carrying loaded Contact-Handled (**CH**) or Remote-Handled (**RH**) Packages. The facility is designed to handle approximately eight truck trailers per day, each carrying one or more CH ~~Contact-Handled~~ or RH ~~Remote-Handled~~ Packages. This is equivalent to 3,640 TRU mixed waste-carrying vehicles per year.

The calculations to support the anticipated maximum load of 115,000 lbs. are shown below:

Soil Resistance R (psi) - is taken directly from the WIPP Soil Report and Bechtel calculation because there is no change.

A. <u>Pavement Thickness</u>
The traffic frequency increase from 10 shipments per day to 10.15 shipments per day has only minimal impact on the Total Expanded Average Load (EAL) and the traffic index (TI) as shown below, both important parameters in pavement design.

Total EAL (TEAL):
13,780 ~ constant for ~~5~~ five or more axles over 20 years, taken from Table 613.3A ~~7-651.2A~~ - Highway Design Manual (HDM) 2006.
TEAL = 13,780 x 25yr./20yr. = 17,225
Using 10.15 shipments per day ~ 17,225 x 10.15 = 174,834

Conversion of EAL to Traffic Index (TI).
For TEAL of 174,834 ~ TI = 7.5 - (from HDM, Table 7-651.2B)

Asphalt Concrete Thickness TAC:
GE=0.0032 x TI x (100 -R)....R=80
GE - Gravel Equivalent (Ft).
GE=0.0032 x 7.5 x 20 = 0.48' ...GfAC = 2.01→ TAC = 0.48/2.01= 0.24' → use 2½" AC Surface Course.
(Actually used: 3")
Gf - Gravel Equivalent Factor (constant from Table 7-651.2C from HDM).

B. Bituminous Treated Base
GE = 0.0032 x TI x (100 -R) .... R = 55 ~ caliche subbase → GE = 1.08' GEBTB = 1.08 - 2.01 x 0.21= 0.66'
TBTB = GEBTB/GfBTB = 0.66/1.2 = 0.55' → Use 4" BTB
GfBTB ~ taken from table 7-651.2C

C. Caliche Subbase ~ TCSB
GE = 0.0032 x TI x (100 -R) .....R=50 - prepared subgrade
GE=1.2
GECSB=1.2 - (0.21x 2.07) - (0.33 x1.2) → 0.37'
TCBS=0.37/1.0=0.37' ~ 4½"

Based on the results of the above calculation, the site paved roads designated for waste transportation are safe to be used by the heavier truckloads carrying shipping casks used in RH TRU mixed waste transportation to the WIPP.

G-3 Waste Handling Building Traffic

~~CH~~ Contact-handled TRU mixed waste will arrive by tractor-trailer at the WIPP facility in sealed ~~Contact Handled~~ CH Packages. Upon receipt, security checks, radiological surveys, and shipping documentation reviews will be performed. A forklift will remove the ~~Contact Handled~~ CH Packages and transport them a short distance through an air lock that is designed to maintain differential pressure in the Waste Handling Building (**WHB**). The forklift will place the shipping containers at one of the two TRUPACT-II unloading docks (**TRUDOCK**) inside the WHB.

The TRUPACT-II may hold up to two 55-gallon drum seven (7)-packs, two 85-gallon drum four (4)-packs, two 100-gallon drum three (3)-packs, two standard waste boxes (**SWB**), or one ten-drum overpack (**TDOP**). A HalfPACT may hold seven 55-gallon drums, one SWB, or four 85-gallon drums. A six-ton overhead bridge crane will be used to remove the contents of the ~~Contact Handled~~ CH Package. Waste containers will be surveyed for radioactive contamination and decontaminated or returned to the ~~Contact Handled~~ CH Package as necessary.

Each facility pallet will accommodate four seven (7)-packs of 55-gallon drums, four SWBs, four ~~four~~ (4)-packs of 85-gallon drums, four three (3)-packs of 100-gallon drums, two TDOPs, or any combination thereof. Waste containers will be secured to the facility pallet prior to transfer. A forklift or facility transfer vehicle will transport the loaded facility pallet the air lock at the Waste Shaft (Figure G-3). The facility transfer vehicle will be driven onto the waste shaft conveyance deck, where the loaded facility pallet will be transferred to the waste shaft conveyance and downloaded for emplacement.

~~RH~~ Remote-handled TRU mixed waste will arrive at the WIPP facility in a payload container contained in a shielded cask loaded on a tractor-trailer. Upon arrival, radiological surveys, security checks, and shipping documentation reviews will be performed, and the trailer carrying

the cask will be moved into the Parking Area or directly into the RH Bay of the Waste Handling Building Unit.

The cask is unloaded from the trailer in the RH Bay and is placed on the Cask Transfer Car. The Cask Transfer Car is used to move the cask to the Cask Unloading Room. At this point, a crane moves the waste to the Hot Cell or the Transfer Cell. Some RH TRU mixed waste may be moved to the Hot Cell for overpacking before being moved to the Transfer Cell. Once in the Transfer Cell, the Transfer Cell Shuttle Car moves the waste beneath the facility cask. A crane is used to move the waste from the Transfer Cell Shuttle Car into the facility cask. The Facility Cask Transfer Car then moves the facility cask to the underground. A more detailed description of waste handling in the WHB is included in Renewal Application Appendix M1. Figures G-45, G-56 and G-67 show RH TRU mixed waste transport routes.

G-4 Underground Traffic

Underground traffic, with and without TRU mixed waste, will travel on separated paths. The ventilation and traffic flow path in the TRU mixed waste handling areas underground are restricted and separate from those used for mining and haulage (construction) equipment (Figure G-74). Non-waste and non-construction traffic use the same routes as waste and construction traffic. In general, waste traffic will use the intake ventilation drift in that area. The exhaust drift in the construction area will generally be used for mining/construction equipment for maximum isolation of this activity from personnel. The exhaust drift in the waste disposal area will normally not be used for personnel access. Non-waste and non-construction traffic is generally comprised of escorted visitors only and is minimized during each of the respective operations.

Adequate clearances that exceed the mining regulations of 30 CFR §57 exist underground for safe passage of vehicles and pedestrians. Pedestrians/personnel are required to yield to vehicles in the WIPP underground facility. This condition is reinforced through the WIPP equipment operating procedures, the WIPP safety policy ~~Safety Manual~~, the WIPP safety briefing required for all underground visitors, the General Employee Training annual refresher course, and the Underground annual refresher course that are mandated by 30 CFR §57, the New Mexico Mine Code, and DOE Order 5480.20A.

In addition, other physical means are utilized to safeguard pedestrians/personnel when underground such as:

- All equipment operators are required to sound the vehicle horn when approaching intersections.

- All airlock and bulkhead vehicle doors are equipped with warning bells or strobe lights to alert personnel when door opening is imminent.

- Hemispherical mirrors are used at blind intersections so that persons can see around corners.

All heavy equipment is required to have operational back-up alarms.

Heavily used intersections are well lighted.

Typically, the traffic routes during waste disposal in all Panels will use the same main access drifts.

All traffic safety is regulated and enforced by the Federal and State mine codes of regulations (30 CFR §57 and New Mexico State Mine Code). The agencies that administer these codes make regular inspection tours of the WIPP underground facilities for the purpose of enforcement.

All underground equipment is designed for off-road use since all driving surfaces are excavated in salt. No loads on the underground roadways will exceed the bearing strength of in situ halite.

1 (This page intentionally blank)

TABLES

(This page intentionally blank)

TABLE G-1
WASTE ISOLATION PILOT PLANT SITE DESIGN DESIGNATION
TRAFFIC PARAMETERS [a]

Traffic Parameter	North Access Road (No. of Vehicles, unless otherwise stated)	South Access Road (No. of Vehicles, unless otherwise stated)	On-Site Waste Haul Roads Contact-Handled and Remote-Handled Package Traffic
Average Daily Traffic (ADT)[b]	800	400	8
Design Hourly Volume (DHV)[c]	144	72	NA [g]
Hourly Volume (Max. at Shift Change)	250	125	NA
Distribution (D)[d]	67%	33%	NA
Trucks (T)[e]	2%	0	100%
Design Speed [h, i]	70 mph (113 kph)	60 mph (97 kph)	25 mph (40 kph)
Control of Access [f]	None	None	Full

[a] For WIPP facility personnel and TRU mixed waste shipments only.

[b] ADT—Estimated number of vehicles traveling in both directions per day.

[c] DHV—A two-way traffic count with directional distribution.

[d] D—The percentage of DHV in the predominant direction of travel.

[e] T—The percentage of ADT comprised of trucks (excluding light delivery trucks).

[f] Control of Access—The extent of roadside interference or restriction of movement.

[g] NA—Not applicable.

[h] mph—miles per hour.

[i] kph—kilometers per hour.

1 (This page intentionally blank)

FIGURES

1 (This page intentionally blank)

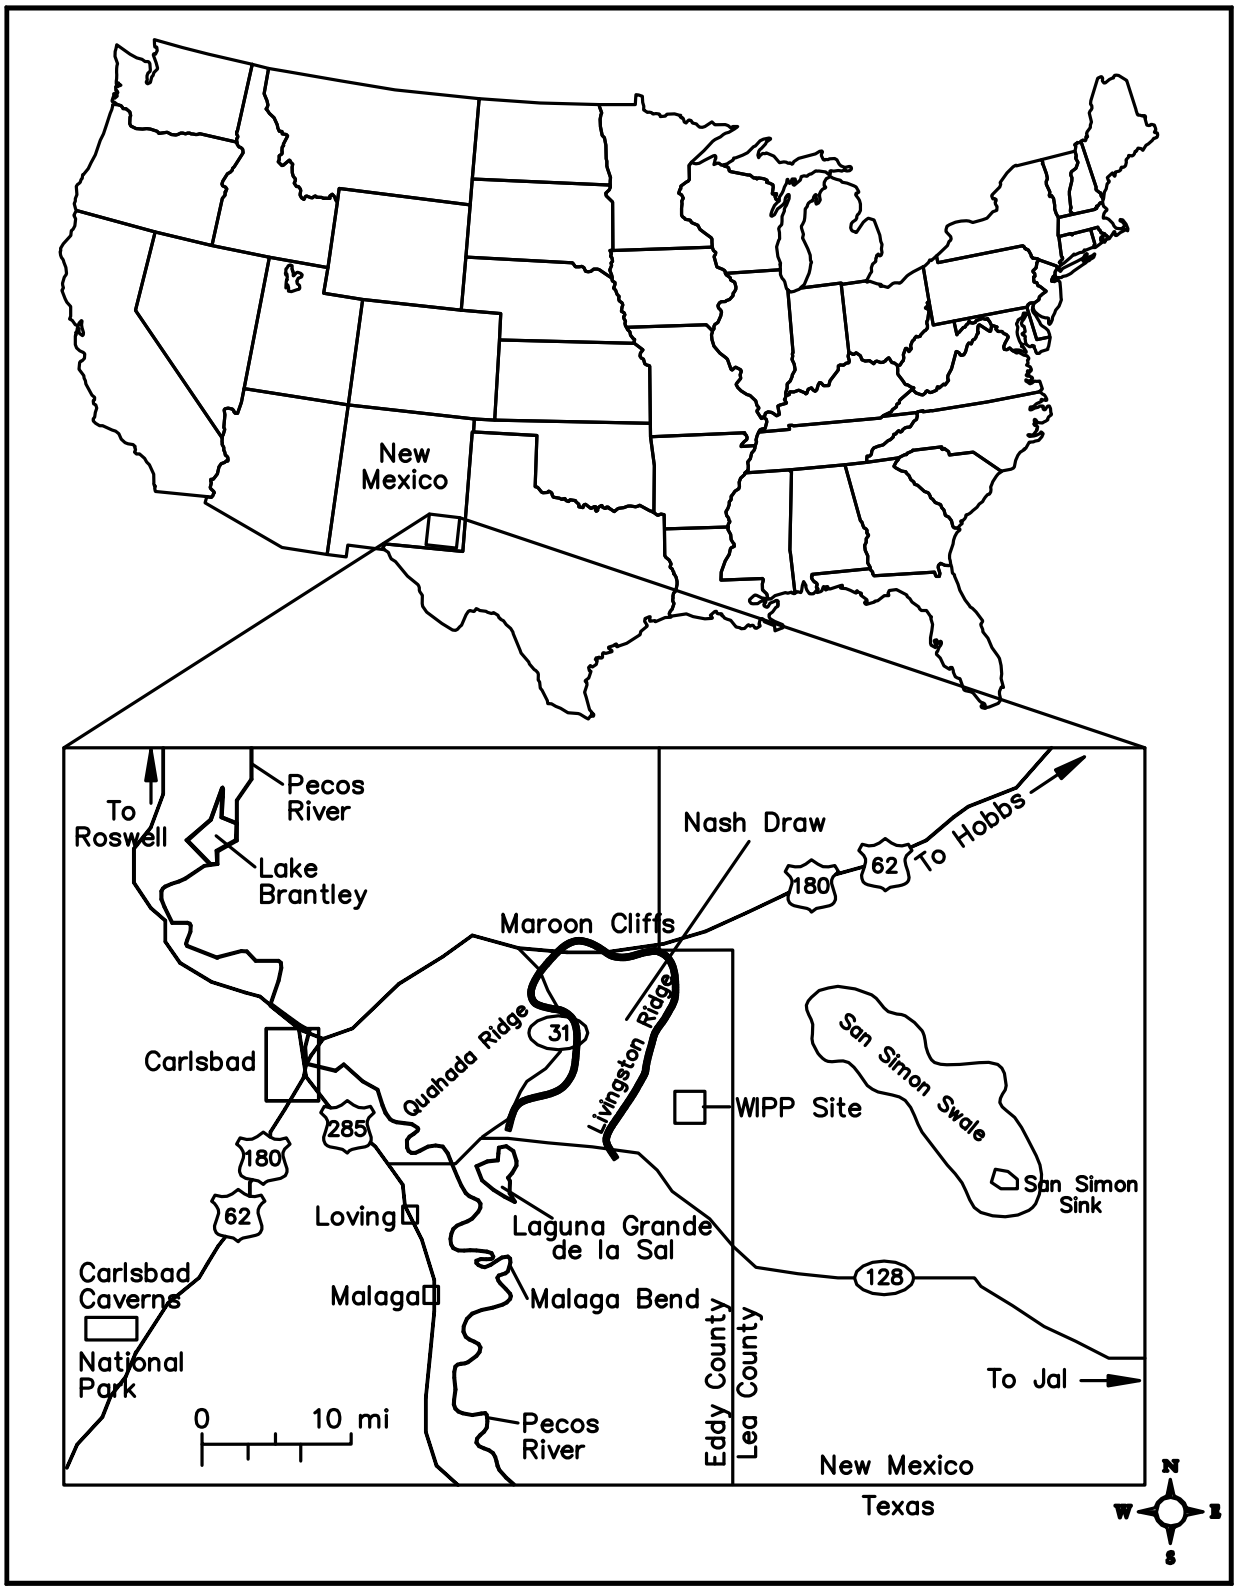

Figure G-1
General Location of the WIPP Facility

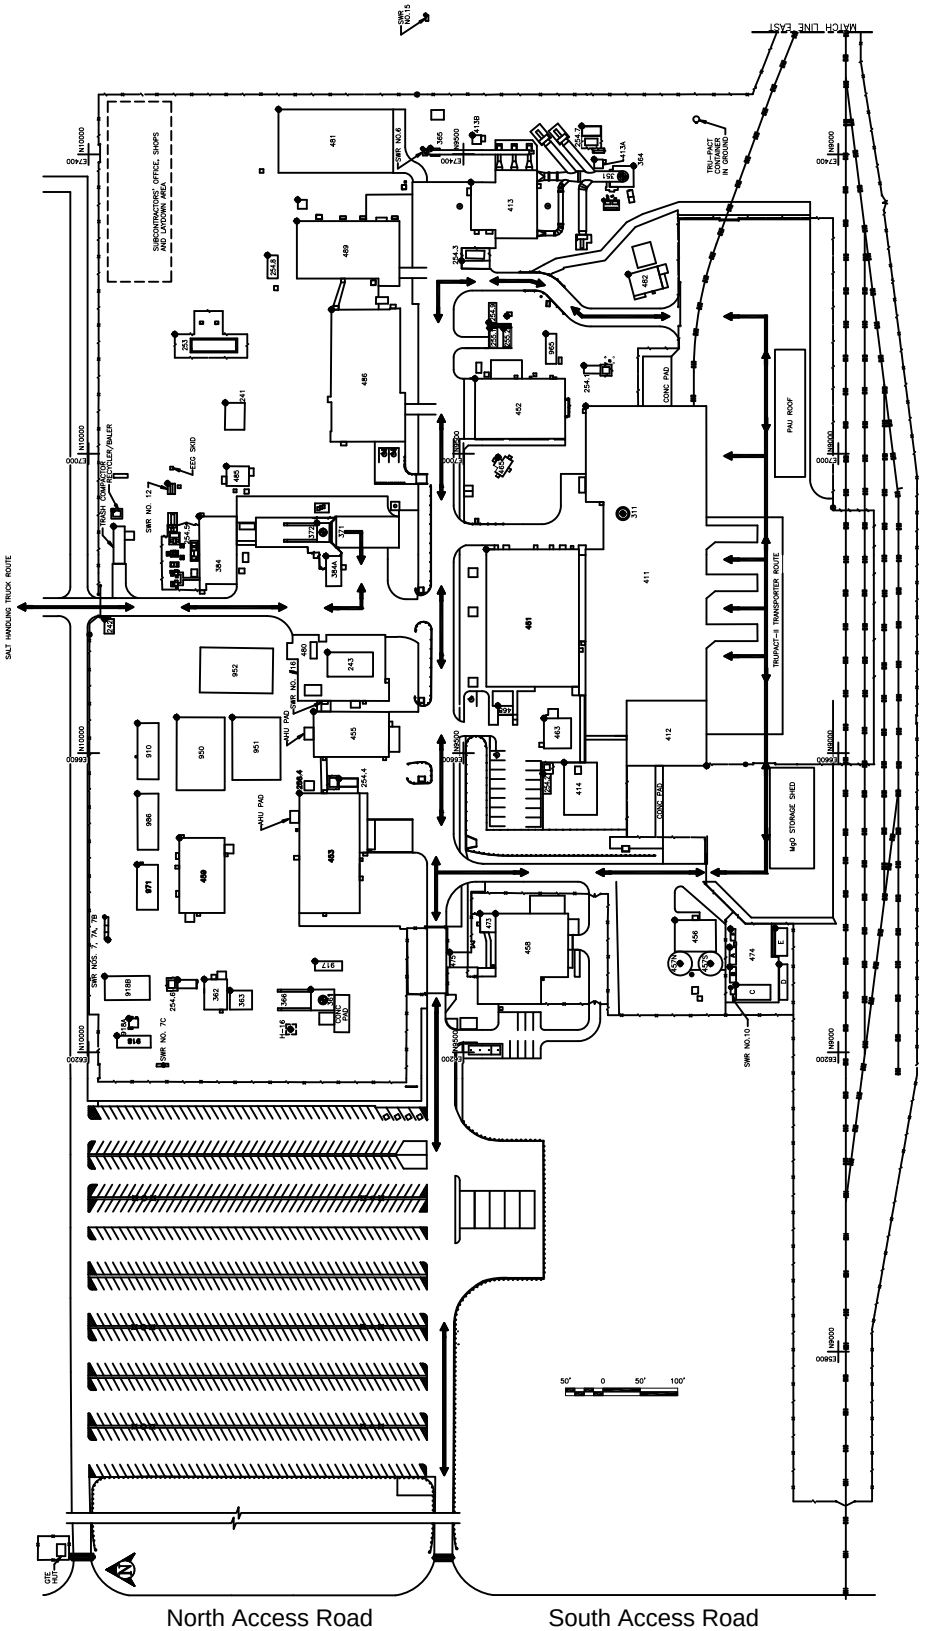

Figure G-2
Typical WIPP Traffic Flow Diagram

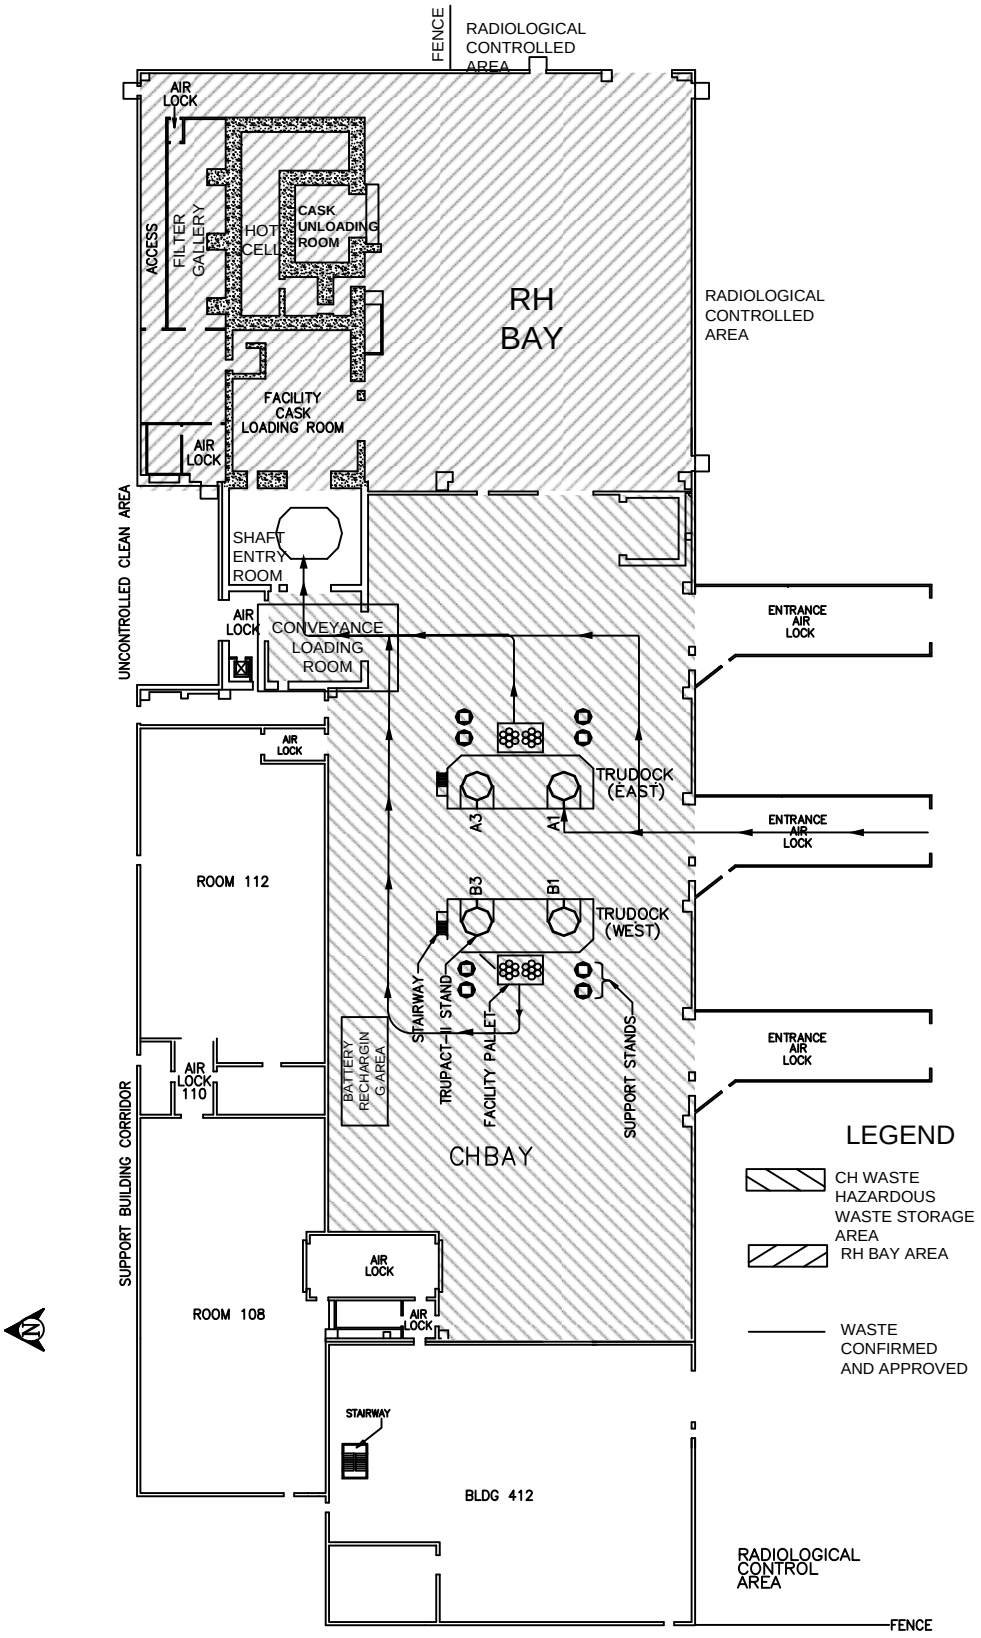

Figure G-3
Typical Waste Transport Routes in Waste Handling Building - Container Storage Unit

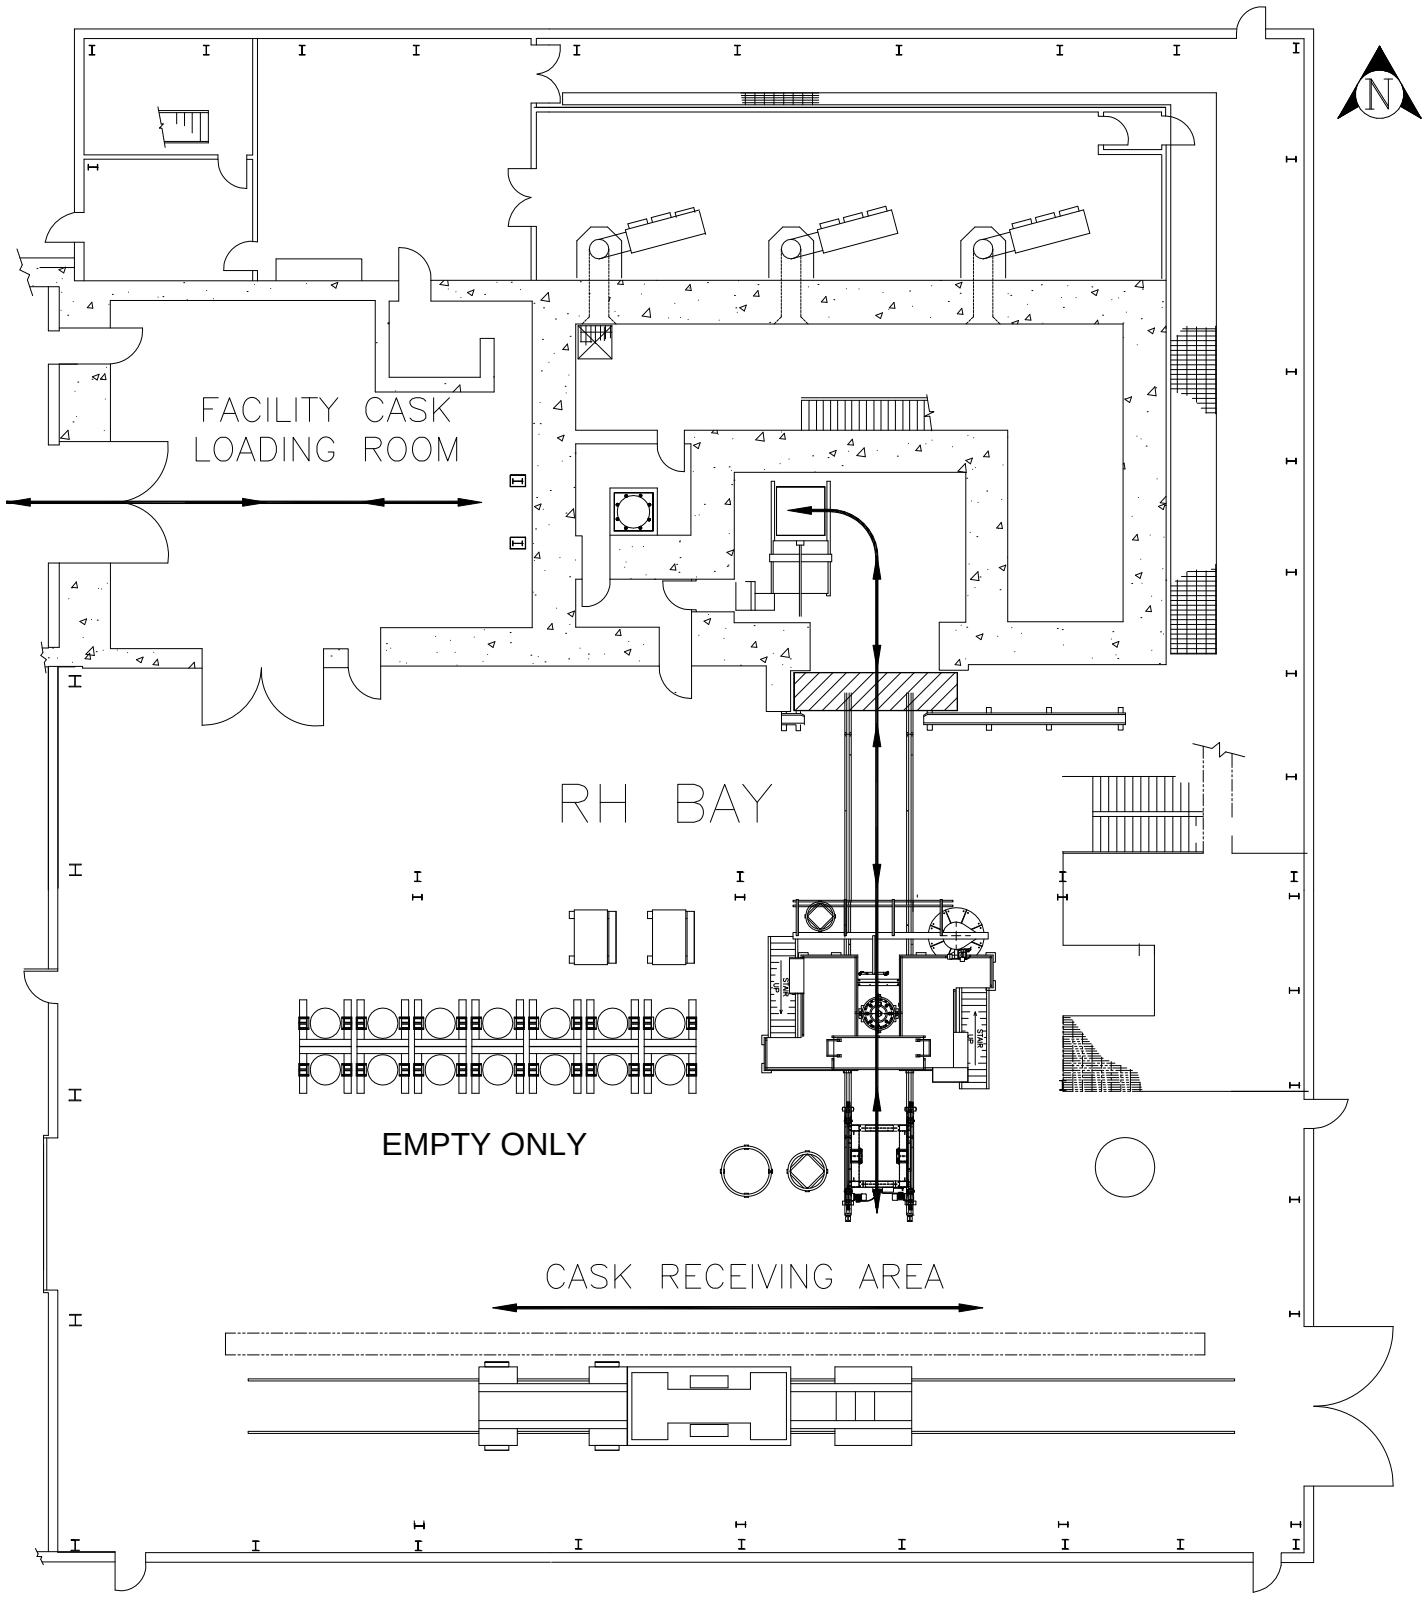

Figure G-5~~4~~
RH Bay Transport Routes

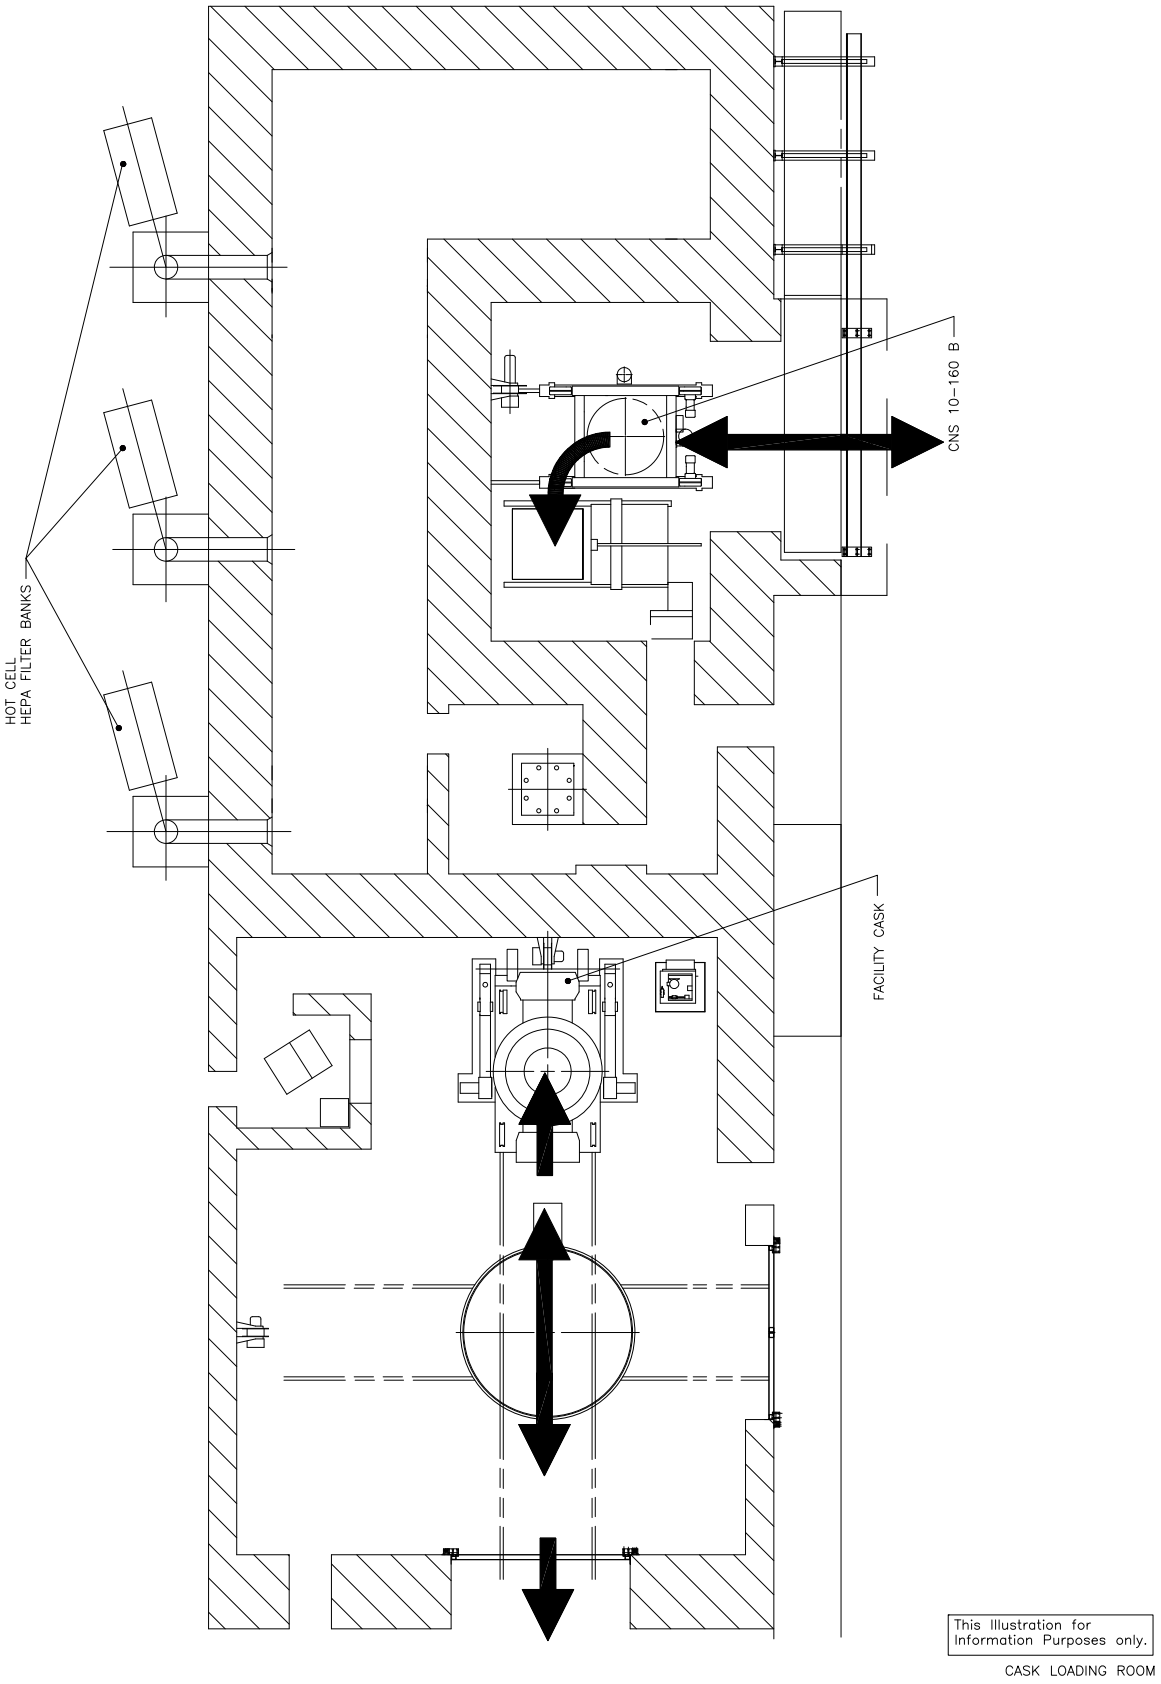

Figure G-65
RH Bay Cask Loading Room Transport Route

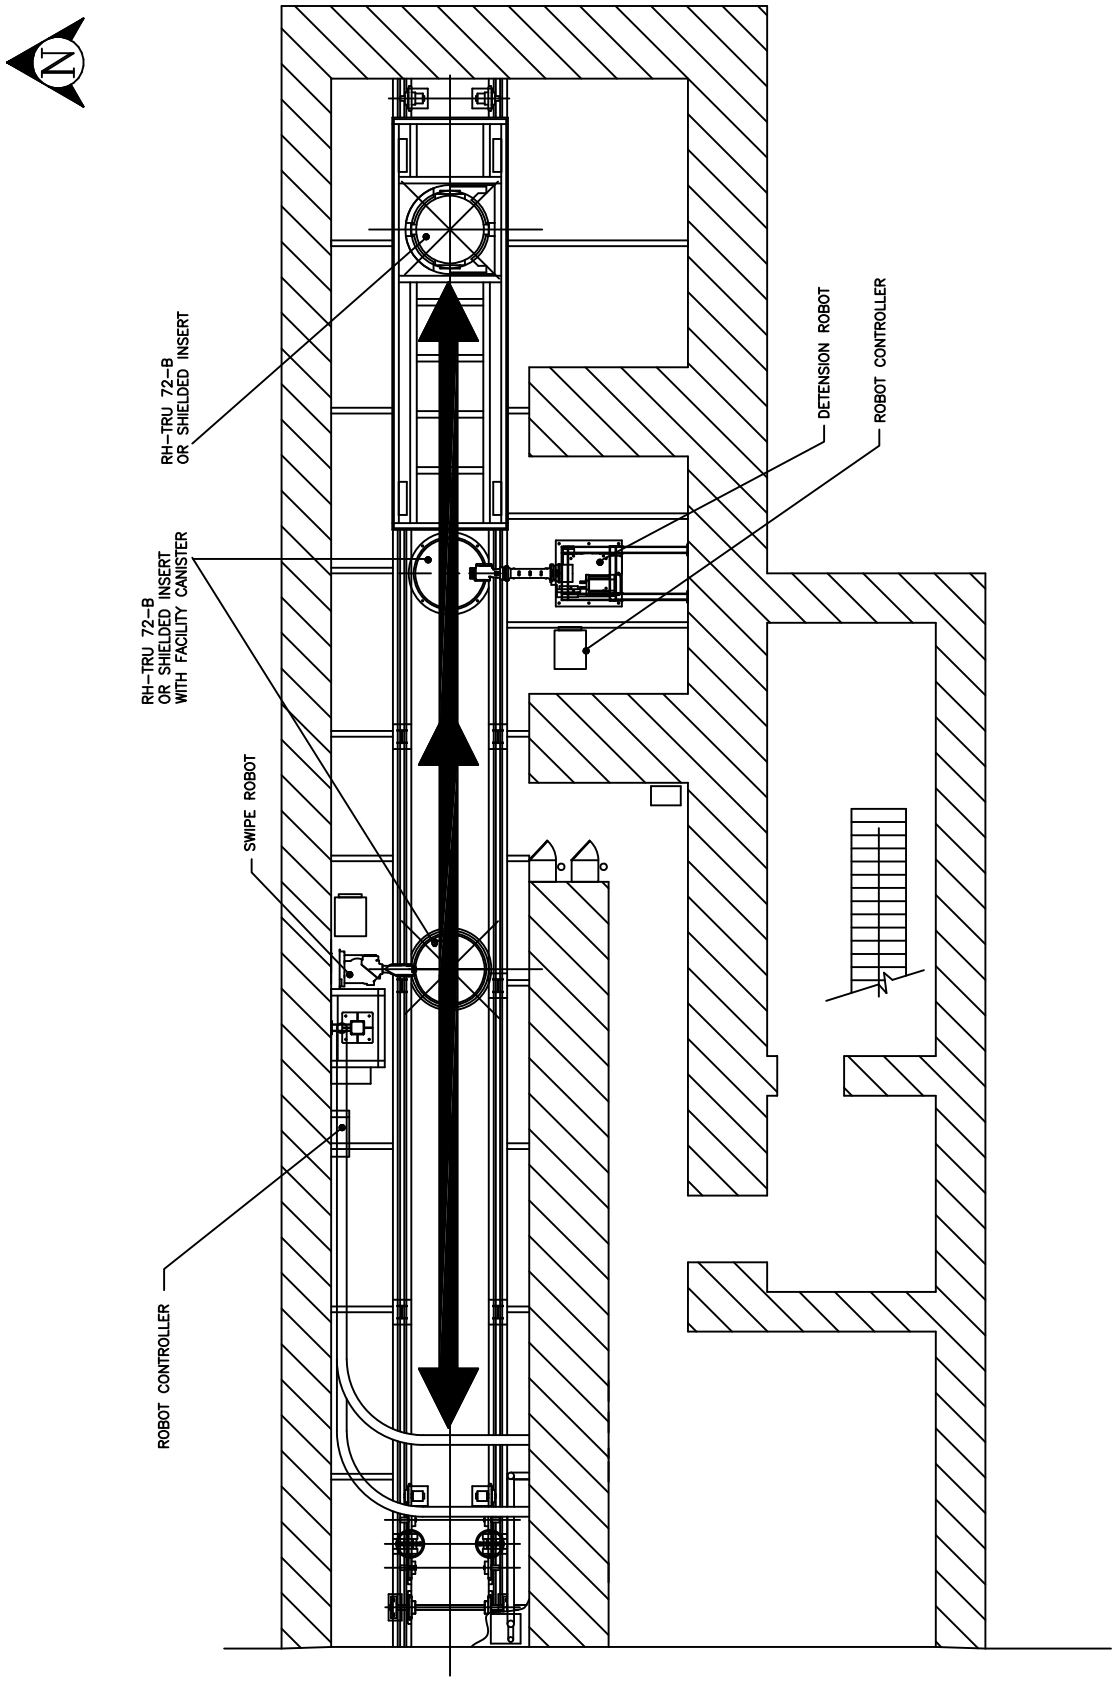

Figure G-~~7~~6
RH Bay Canister Transfer Cell Waste Transport Route

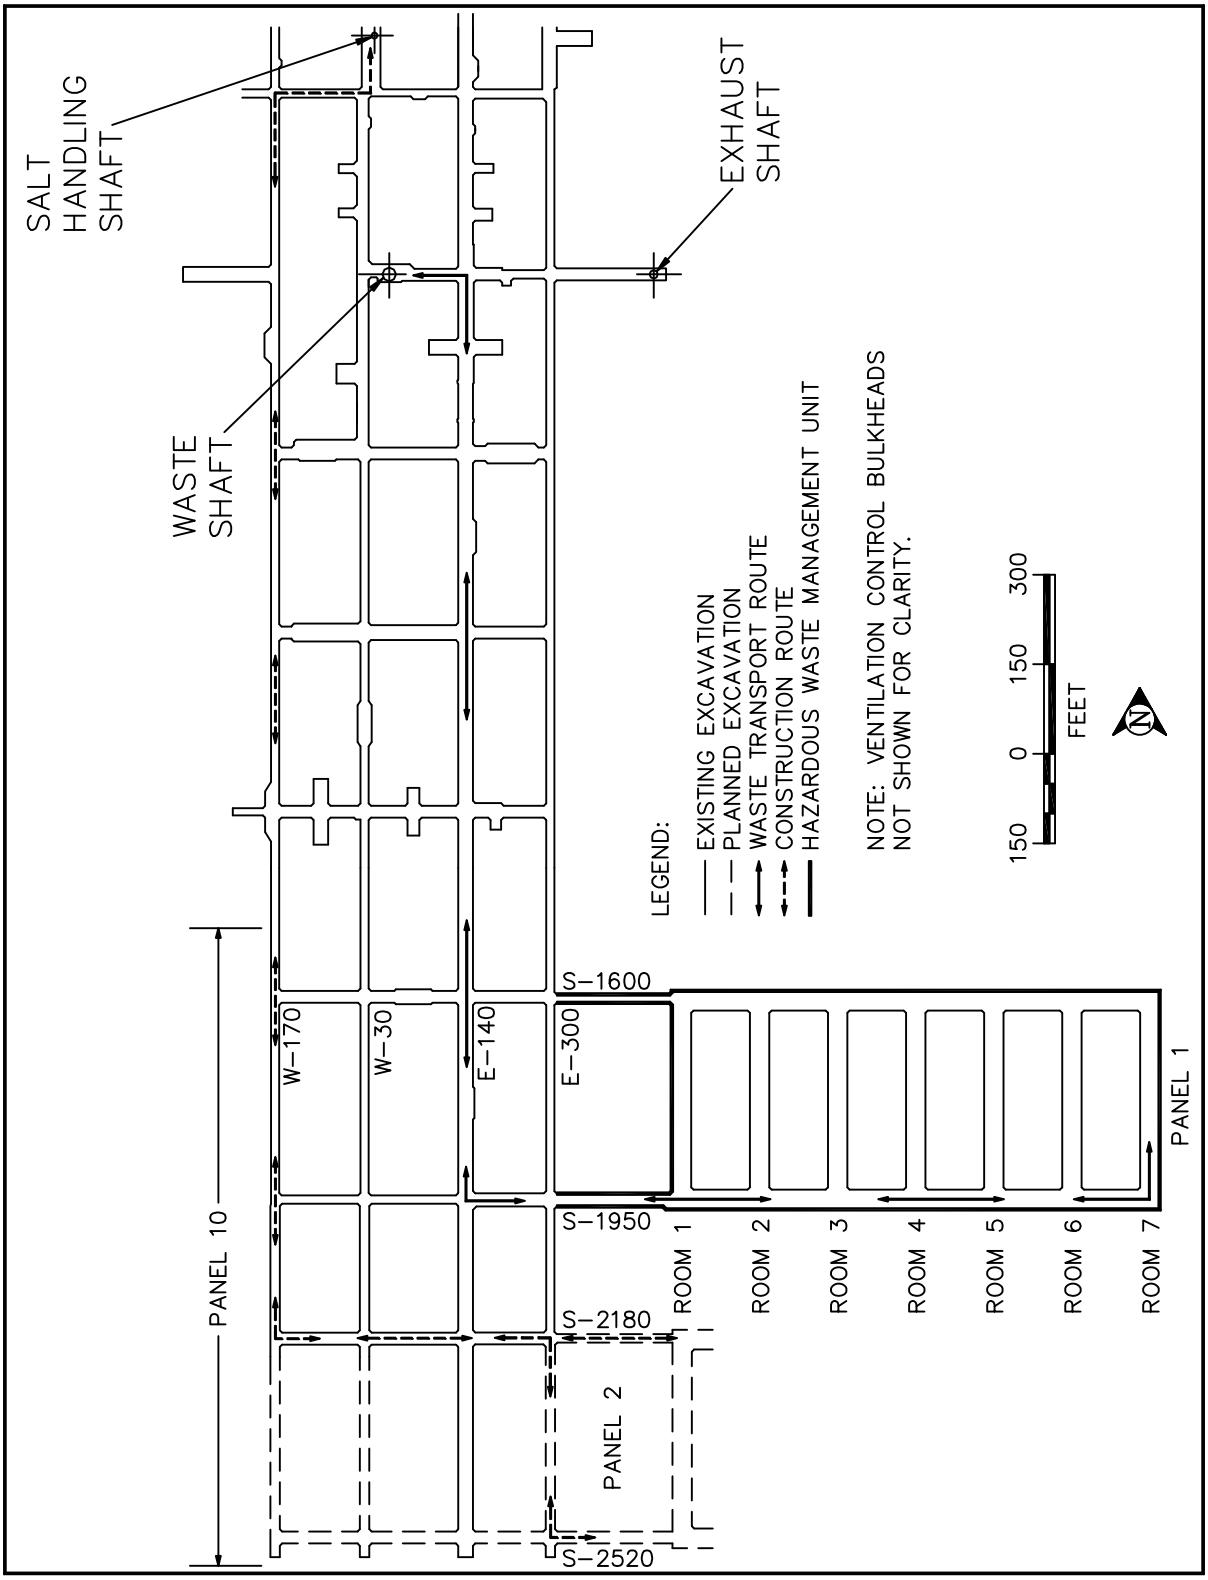

Figure G-47
Typical Underground Transport Route