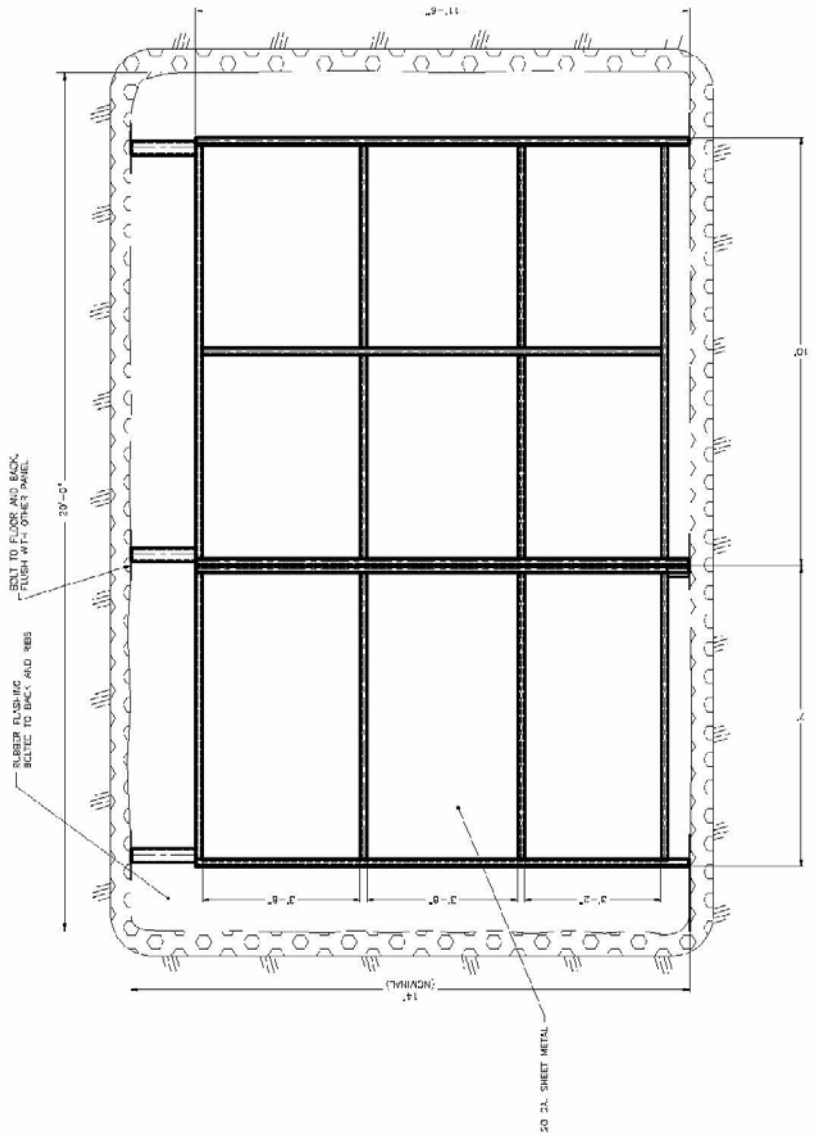

TYPICAL BULKHEAD

NOTE:
1) The joining of the two modular pieces (the 10' & 7' sections) should be sealed with taped foam similar to what is used around mandoors.
2) All framing will be covered with 20 guage sheet metal.
3) Rubber bat or other suitable material wil be used to seal from the frame to the back, floor and ribs.

Figure 2
Bulkhead Design

NOTES	REFERENCE DRAWINGS
1. ALL DIMENSIONS INDICATED ARE NOMINAL DUE TO ACCESS LIMITATIONS. ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE NOTED.	

U.S DEPARTMENT OF ENERGY
Washington TRU Solutions
Waste Isolation Pilot Plant Carlsbad, New Mexico

PANEL NO
SKETCH #_____

SYSTEM	WBS	DWG TYPE	CL	VENDOR

REV	ISSUE DESCRIPTION	DFTR	CHKR	COG	DM	FFC	PWR
NEW	ADDED FOR COG						

THIS DWG TAKEN FROM: N/A VENDOR: N/A