

DOE/WIPP-99-2308
REV. 5

Delaware Basin Monitoring Annual Report




September 2004

**United States Department of Energy
Waste Isolation Pilot Plant**

**Carlsbad Field Office
Carlsbad, New Mexico**

Delaware Basin Monitoring Annual Report

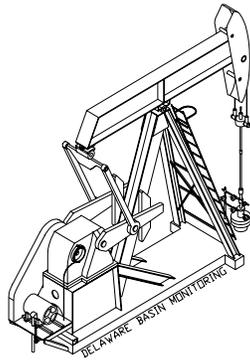

September 2004

United States Department of Energy Waste Isolation Pilot Plant

Carlsbad Field Office
Carlsbad, New Mexico

Prepared for
the **Department of Energy** by
Washington Regulatory & Environmental Services
David Hughes
Delaware Basin Drilling Surveillance Program

Table of Contents

1.0	Delaware Basin Drilling Surveillance Program	1
2.0	2004 Updates	2
2.1	Miscellaneous Drilling Information	2
2.1.1	Drilling Techniques	3
2.1.2	Drilling Fluids	4
2.1.3	Air Drilling	4
2.2	Shallow Drilling Events	6
2.3	Deep Drilling Events	6
2.4	Past Drilling Rates	7
2.5	Current Drilling Rate	8
2.5.1	Nine-Township Area Drilling Activities	8
2.5.2	Drilling Activities Outside the Nine-Township Area	8
2.6	Castile Brine Encounters	10
2.7	Borehole Permeability Assessment - Plugging Practices	10
2.8	Seismic Activity in the Delaware Basin	12
2.9	Secondary and Tertiary Recovery	13
2.9.1	Nine-Township Area Injection Wells	13
2.9.2	Nine-Township Area Salt Water Disposal Wells	14
2.10	Pipeline Activity	14
2.11	Mining	15
2.11.1	Potash Mining	15
2.11.2	Sulfur Extraction	15
2.11.3	Solution Mining	16
2.11.4	Brine Wells	16
2.12	New Drilling Technology	17
3.0	Survey of Well Operators for Drilling Information	17
4.0	Summary - 2004 Delaware Basin Drilling Surveillance Program	18
5.0	References	19

List of Figures

Figure 1	WIPP Site, Delaware Basin, and Surrounding Area	20
Figure 2	Typical Well Structure and General Stratigraphy Near the WIPP Site	21
Figure 3	Oil and Gas Wells Within One Mile of the WIPP Site	22
Figure 4	Typical Borehole Plug Configurations in the Delaware Basin	23
Figure 5	Typical Injection or Salt Water Disposal Well (SWD)	24
Figure 6	Active Injection and SWD Wells in the Nine-Township Area	25
Figure 7	Potash Mining in the Vicinity of the WIPP Site	26
Figure 8	Active Brine Well Locations in the Delaware Basin	27

List of Tables

Table 1	Nine-Township Area Casing Sizes	28
Table 2	Nine-Township Area Bit Sizes	28
Table 3	Air-Drilled Wells in the New Mexico Portion of the Delaware Basin	29
Table 4	Shallow Well Status in the Delaware Basin	30
Table 5	Deep Well Status in the Delaware Basin	31
Table 6	Past Drilling Rates for the Delaware Basin	32
Table 7	Castile Brine Encounters in the Vicinity of the WIPP Site	33
Table 8	Plugged Well Information	34
Table 9	Plugging Summary by Well Type	37
Table 10	Seismic Activity in the Delaware Basin	38
Table 11	Nine-Township Injection and SWD Well Information	39
Table 12	Brine Well Status in the Delaware Basin	41

1.0 Delaware Basin Drilling Surveillance Program

The Delaware Basin Drilling Surveillance Program (DBDSP) is designed to monitor drilling activities in the vicinity of the Waste Isolation Pilot Plant (WIPP). This program is based on Environmental Protection Agency (EPA) criteria. The EPA environmental radiation protection standards for the management and disposal of spent nuclear fuel, high-level and transuranic radioactive wastes are codified in Title 40 Code of Federal Regulations (CFR) Part 191 (EPA 1993). Subpart B of the standard addresses the disposal of radioactive waste. The standard requires the Department of Energy (DOE) to demonstrate the expected performance of the disposal system using a probabilistic risk assessment or performance assessment (PA). The results of the PA must show that the expected repository performance will not result in the release of radioactive material above limits set by the EPA's standard. This assessment must include the consideration of inadvertent drilling into the repository at some future time.

In Title 40 CFR Part 194 (EPA 1996), the EPA defined the geographical area for the evaluation of the historical rate of drilling for resources, as the Delaware Basin. This same area is to be used for monitoring drilling and drilling-related activities. The definition of the Delaware Basin in Title 40 § 194.2 is:

“Delaware Basin means those surface and subsurface features which lie inside the boundary formed to the north, east and west of the [WIPP] disposal system, by the innermost edge of the Capitan Reef, and formed, to the south, by a straight line drawn from the southeastern point of the Davis Mountains to the most southwestern point of the Glass Mountains.”

The Delaware Basin, depicted in Figure 1, includes all or part of Brewster, Culberson, Jeff Davis, Loving, Pecos, Reeves, Ward, and Winkler counties in west Texas, and portions of Eddy and Lea counties in southeastern New Mexico.

The DOE continues to provide surveillance of the drilling activity in the Delaware Basin in accordance with the criteria established in Title 40 CFR Part 194. This will continue until the DOE and the EPA mutually agree no further benefit can be gained from continued surveillance. The results of the ongoing surveillance will be used to determine if a significant and detrimental change has occurred that would affect the performance of the disposal system.

The *Delaware Basin Drilling Surveillance Plan* (WP 02-PC.02) places specific emphasis on the nine-township area that includes the WIPP Site and provides data to build on the information presented in Appendix DEL of the Compliance Certification Application (CCA) (DOE 1996) and Appendix DATA of the Compliance Recertification Application (CRA) (DOE 2004).

2.0 2004 Updates

The PA is required by regulation to consider disturbed case scenarios that include intrusions into the repository by inadvertent and intermittent drilling for resources. The probability of these intrusions is based on a future drilling rate of 46.8 boreholes per square kilometer per 10,000 years which was established for the 1996 CCA in Appendix DEL and 52.5 boreholes per square kilometer for the 2004 CRA in Appendix DATA. These rates are based on consideration of the past record of drilling events in the Delaware Basin. The DOE models multiple types of human intrusion scenarios in the PA. These include both single intrusion events and combinations of multiple boreholes.

Two different types of boreholes are considered: (1) those that penetrate a pressurized brine reservoir in the underlying Castile Formation and (2) those that do not. While the presence of pressurized brine under the repository is speculative, it cannot be completely ruled out based on available information. The primary consequence of contacting pressurized brine is the introduction of an additional source of brine beyond that which is assumed to be released into the repository from the Salado Formation. The human intrusion scenario models are based on extensive field data sets collected by the DOE. The DBDSP collects the drilling-related data to be used for future PA calculations. The data have been collected from the time of the 1996 submittal of the CCA to the present and include specific wells drilled during the last year in the New Mexico portion of the Delaware Basin, specifically that of the nine-township area immediately surrounding the WIPP Site. These data are summarized in the following sections.

2.1 Miscellaneous Drilling Information

The EPA provided criteria in Title 40 CFR §194.33(c) to address the consideration of drilling in the PA. These criteria led to the formulation of conceptual models that incorporate the effects of these activities. The conceptual models use parameter values as documented in Appendix DEL of the CCA, such as:

- drill collar diameter and length
- casing diameters
- drill pipe diameter
- speed of drill string rotation through the Salado Formation
- penetration rate through the Salado Formation
- instances of air drilling
- types of drilling fluids
- amounts of drilling fluids
- borehole depths
- borehole diameters
- borehole plugs
- fraction of each borehole that is plugged
- instances of encountering pressurized brine in the Castile Formation

The DBDSP data set includes the final borehole depth for all wells drilled in the Delaware Basin. Borehole depths range from 19 feet to 25,201 feet. The 19-foot hole is an exhaust shaft monitoring well located on the WIPP Site, and the 25,201-foot hole is a gas well located in Texas. Borehole depths in the immediate vicinity of the WIPP Site typically range from 7,750 to 9,000 feet for oil wells and 13,000 to 16,000 feet for gas wells.

The diameter of each well bore is more difficult to ascertain. The DBDSP data set included the casing size and depth for each section of the hole (Table 1). Drill bit size is not a reportable element, although hole sizes are reported on Sundry notices (miscellaneous forms) maintained by the New Mexico Oil Conservation Division (NMOCD). The casing size or hole size is used to determine the size of the bit used to drill that particular section of the well. Currently, the most common bit sizes are 17 ½ in. for the surface section, 11 in. for the intermediate section, and 7 7/8 in. for the production section of the hole. Table 2 shows the bit sizes used in drilling a well in the nine-township area.

In the early days of well drilling, the 12 ¼ in. bit was popular with rotary drill operators for the surface section of the hole. In those days, the wells were much shallower and did not require the larger casing sizes. Most holes drilled at that time were two-string (string refers to the different size of casing in the wellbore) holes versus the three- and four-strings commonly used now. In the area of the WIPP Site, regulations require a three-string hole making the larger bit sizes more popular. The typical hole and casing sizes for a three-string well in the vicinity of the WIPP Site are shown in Figure 2.

When drilling a well many factors come into play: the depth to be drilled, the geology of the substrata, the equipment being used, etc. In the early 1950s, it commonly took an average of 50 days to drill a well to depth. Now it takes approximately 20 days to drill a well.

2.1.1 Drilling Techniques

The drilling techniques reported in Appendix DEL of the CCA are still being implemented by area drillers. There were a total of 149 hydrocarbon wells spudded, not necessarily completed, in the New Mexico portion of the Delaware Basin from September 1, 2003 through August 31, 2004. This number is derived from the databases maintained by the DBDSP. In reality, the number of new wells is higher; but the paperwork on some of the wells has not been filed with the NMOCD or will be filed after the writing of this report. Therefore, those wells are not included in the count listed above. For example, during the last year 154 wells were added to the databases for New Mexico, meaning five wells were reported late.

Rotary drilling rigs were used to drill all 149 wells. Some have been completed as oil wells, others as gas wells, while the rest are still in the process of being completed. All were conventionally drilled utilizing mud as a medium for circulation. Forty-six of these wells were in the nine-township area. The depths of the completed wells in the nine-township area range from 7,769 feet to 10,080 feet. Outside of the nine-township area the depths of the completed wells range from 2,510 feet to 17,364 feet.

A technique used by operators to increase production is to drill a well directionally or horizontally after a target depth is reached, which allows for more area of the wellbore to be in the production zone. As reported in Appendix DEL, this technique is not often used in this area because of the increased costs (it adds to the drilling time). The DBDSP monitors directional or horizontal drilled wells only in the nine-township area. Two of the 46 new wells spudded during the last year in the nine-township area were directional or horizontal drilled wells. Both are located in T22S-R30E-25 and have their bottom hole location approximately 400 feet north of the surface location at a depth of just over 7,800 feet.

2.1.2 Drilling Fluids

Employing a rotary rig for drilling involves the use of drilling fluids. Drilling fluid is commonly known as mud, which is the liquid circulated through the wellbore during rotary drilling and workover operations. In addition to its function of bringing cuttings to the surface, drilling mud cools and lubricates the bit and drill stem, protects against blowouts by holding back subsurface pressures, and deposits a mud cake on the wall of the borehole to prevent loss of fluids to the formation.

Typically, a driller will use fresh water and additives to drill the surface section of the hole which ends at the top of the Salado Formation. A change in drilling practices would necessitate a change in the application of drilling fluids. Within the Known Potash Leasing Area (KPLA) of southeastern New Mexico, drillers are required under Title 19, Chapter 15, Order R-111-P of the New Mexico Administrative Code (NMAC) to use a saturated brine to drill through the salt formation which is usually called the intermediate section. This requirement is to keep the salt from washing out and making the hole larger than necessary. Once this section has been drilled and cased, the driller again changes to fresh water and additives to finish drilling the hole to depth.

2.1.3 Air Drilling

A method of hydrocarbon drilling not emphasized in CCA Appendix DEL is air drilling. As defined by the oil industry, air drilling is a method of rotary drilling using compressed air as the circulation medium. The conventional method of removing cuttings from the wellbore is to use a flow of water or drilling mud. In some cases, compressed air removes the cuttings with equal or greater efficiency. The rate of penetration is usually increased considerably when air drilling is used; however, a fundamental problem in air drilling is the penetration of formations containing water, since the entry of water into the system reduces the ability of the air to remove cuttings.

Critics noted the air drilling scenario was not included by the DOE in the CCA and raised several issues: (1) air drilling technology is currently successfully used in the Delaware Basin, (2) air drilling is thought to be a viable drilling technology under the hydrological and geological conditions at the WIPP Site, and (3) air drilling could result in releases of radionuclides that are substantially greater than those considered by the DOE in the CCA. Much research on the issue

of air drilling in the Delaware Basin has been done. It has been shown that although air drilling is a common method of drilling wells it is not practiced in the vicinity of the WIPP Site because (1) it is against R-111-P regulations to drill with anything but saturated brine through the salt formation in the KPLA; (2) it is not economical to drill with air when a driller has to use saturated brine for the intermediate section; and (3) if water is encountered prior to or after drilling the salt formation, the driller would have to convert to a conventional system of drilling.

Additional information was provided to EPA Air Docket No. A-93-02, IV-G-7. In this information, the following was provided:

The well record search has continued and now includes information from the entire New Mexico portion of the Delaware Basin. Within the nine-townships surrounding the WIPP, the records showed no evidence of air drilling. One possible exception to this may be the Lincoln Federal #1. This well is said to have been air drilled due to a loss of circulation at a depth of 1290 feet, but this has not been verified. The records associated with the Lincoln Federal #1 do not contain any evidence of air drilling. Rather, this information is based on verbal communications with the operating and drilling companies involved with the well. Nonetheless, the Lincoln Federal #1 may have been drilled with air, although it was not a systematic use of the technology. Air drilling at this well was used from 2984' to 4725' merely as a mitigative attempt to continue drilling to the next casing transition depth. After this casing transition, mud drilling was used for the remainder of the hole.

The area of the expanded search contains 3,756 boreholes. Of these, 407 well files were unavailable for viewing (in process), therefore, 3,349 well files constitute the database. Among these wells, 11 instances of air drilling were found in which any portion of the borehole was drilled with air. Only 7 of these were drilled through the Salado Formation at the depth of the repository. This results in a frequency of 7/3349, or 0.0021. This value is conservative in that it includes the Lincoln Federal #1, and four other wells which were proposed to be drilled with air, but no subsequent verification of actual drilling exists in the records.

In the Final Rule, the EPA said air drilling did not have to be considered for PA; however, the DBDSP will continue to follow up on all wells drilled to determine if any section of the well has been air drilled.

During the summer of 1999, another search of these same records was conducted as a follow up to the original research. This search of the records was used as a quality assurance check of the original search. The database consisted of 3,810 boreholes with only 12 records unavailable for viewing. This search added five more wells with indications of some portion of the hole being drilled with air. None were located in the nine-township area or were air drilled through the Salado Formation. Of the five wells added to the count, one (the Sheep Draw "28" Federal #13) had the first 358 feet air drilled while the other four had the conductor pipe drilled with air which consists of the first 40 feet of the borehole and is not usually reported in the drilling process. The conductor casing is typically drilled, set in place, and cemented prior to setting up the rotary drilling rig that will eventually drill the well.

The records on the new wells spudded during the last year (September 1, 2003 through August 31, 2004) are being checked as they become available at the NMOCD Internet site for instances

of air drilling. The records can be submitted to the NMOCD offices as late as two years after the well has been drilled. The record review is an ongoing process conducted on a continuous basis. None of the records reviewed to date have indicated any instances of air drilling. As was presented in the testimony (public hearings conducted by the EPA on WIPP certification) and continues to be validated by ongoing review, air drilling is not a common practice in the vicinity of the WIPP Site. Table 3 shows all of the known air drilling incidents that have occurred in the New Mexico portion of the Delaware Basin.

2.2 Shallow Drilling Events

One of the criteria of Title 40 CFR Part 194 is that the CCA must adequately and accurately characterize the frequency of shallow drilling within the Delaware Basin, as well as, support the assumptions and determinations, particularly those that limit consideration of shallow drilling events based on the presence of resources of similar type and quantity found in the controlled area. The DOE concluded in Appendix SCR that shallow drilling could be removed from PA consideration based on low consequence. As a result, the DOE did not include shallow drilling in its PA drilling rate calculations and did not include any reduction in shallow drilling rates during the active and passive institutional control periods. In Compliance Application Review Document (CARD) 32, the EPA accepted the DOE's finding that shallow drilling would be of low consequence to repository performance and need not be included in the PA.

Although the EPA has agreed shallow drilling can be eliminated from the PA and need not be tracked, the DBDSP collects data on all wells drilled within the boundaries of the Delaware Basin. The program makes no distinctions between shallow and deep drilling events except when calculating the intrusion rate for deep drilling. Information on all wells drilled is vital for trending future activities. Table 4 shows a breakdown of the various types and number of shallow wells located within the Delaware Basin.

2.3 Deep Drilling Events

In accordance with the criteria, the DOE used the historical rate of drilling for resources in the Delaware Basin to calculate a future drilling rate. In particular, in calculating the frequency of future deep drilling, Title 40 CFR §194.33(b)(3)(i) (EPA 1996) provided the following criteria to the DOE:

Identify deep drilling that has occurred for each resource in the Delaware Basin over the past 100 years prior to the time at which a compliance application is prepared.

The DOE used the historical record of deep drilling for resources below 2,150 feet that has occurred over the past 100 years in the Delaware Basin. This was chosen because it is the depth of the repository, and the repository is not directly breached by boreholes less than this depth. In the past 100 years, deep drilling occurred for oil, gas, potash, and sulfur. These drilling events were used in calculating a rate for deep drilling for the PA as discussed in Appendix DEL of the CCA. The period of calculation used was from 1896 through June 1995. Historical drilling for

purposes other than resource exploration and recovery (such as WIPP Site investigation) were excluded from the calculation in accordance with criteria provided in §194.33.

In the Delaware Basin, deep drilling events are usually associated with oil and gas drilling. Commercial sources and visits to the NMOCD offices and Internet site are used to identify these events. The DBDSP collects data on all drilled wells within the Delaware Basin, making no distinction between resources. Two separate databases are maintained on hydrocarbon wells, one for Texas and one for New Mexico. As information on wells is acquired, it is entered into the individual databases. The Texas database contains information only on the current status of the well, when it was drilled, its location, who the operator is, and the total depth of the well. The Texas portion of the Delaware Basin is used only for calculating the drilling rate. The database for the New Mexico portion of the Delaware Basin contains the same basic information as Texas along with all the information required for PA related drilling events.

The DBDSP continues to monitor all hydrocarbon drilling activity and any new potash, sulfur, water, or monitoring wells for deep-drilling events. Information from the drilling of these wells is added to the databases maintained for these separate resources. During the last year, there were 279 new wells added to the databases. Most of the wells were drilled for hydrocarbon extraction and almost all were deep-drilling events. Forty-six of these new wells are in the nine-township area immediately surrounding the WIPP Site. Table 5 shows the number and type of deep wells located in the Delaware Basin.

2.4 Past Drilling Rates

The EPA provided a formula for calculating the current drilling rate or intrusion rate when 40 CFR Part 194 was promulgated. The formula is as follows: number of holes drilled in the last 100 years times 10,000 years divided by the area of the Delaware Basin (23,102.1 km²) divided by 100 years (1897-1996, the year the CCA was submitted). This formula is used to calculate both shallow and deep drilling rates for each resource. Since shallow drilling events are of low consequence, only deep drilling events are applied to the formula. The DBDSP uses all deep drilling events of any resource (potash, oil, gas, water, etc.) to calculate the drilling or intrusion rate. Including resources other than hydrocarbon will not affect the product of the formula due to the high number of deep drilling events recorded over the last 100 years in the Delaware Basin.

The drilling rates since the submittal of the CCA in 1996 are shown in Table 6. The large increase between 1996 and 1997 is the result of updating the databases with information from June 1995 through August 1997. Also, the 100-year window is considered a sliding window, in which 100 years worth of data are used each time the calculation is performed. As each new year's data are added, the oldest year's data are dropped. For example, the drilling rate was calculated in 1999 by using the data from 1900 through 1999. In 2000, the data from 1901 through 2000 was used to calculate the drilling rate.

2.5 Current Drilling Rate

The calculated intrusion or drilling rate for 2004 was derived from the information provided in Table 5. There were 18,615 resource holes within the Delaware Basin; with 12,531 deeper than 2,150 feet. Applying the formula results in the following: $12,531 \text{ boreholes} \times 10,000 \text{ years} / 23,102.1 \text{ km}^2 / 100 \text{ years}$. This results in a drilling or intrusion rate of 54.2 boreholes per km^2 over 10,000 years.

This is an increase from the 46.8 boreholes per km^2 reported in the 1996 CCA. This number is anticipated to rise for several more years before it begins to drop. This is because of the 100-year time frame used for drilling results. As new wells are added to the count, wells older than 100 years are dropped. It will be 2011 before any wells are dropped from the count while a number of new wells will be added due to ongoing oil and gas drilling activity, thus driving up the rate.

2.5.1 Nine-Township Area Drilling Activities

From September 1, 2003 to August 31, 2004, there were 46 new wells spudded in the nine-township area immediately surrounding the WIPP Site. Thirteen new wells were drilled in the one-mile area surrounding the WIPP Site with all but one immediately to the west of the site. Figure 3 shows the status of all known hydrocarbon wells drilled within the one-mile area of the WIPP Site. Of the 46 new wells, 38 were drilled in Eddy County and eight in Lea County. Ten of the wells were to the northeast and east of the site, 12 to the west of the site, while the rest were all south of the site. Devon Energy Production Company drilled the most new wells in the nine-township area with 31 wells (four last year). Pogo Producing Company had seven new wells (16 last year), and Yates Petroleum Corporation drilled four new wells (17 last year) in the nine-township area during the last year. These three companies are the major producers in the area along with other companies such as, EOG Resources, Bass Enterprises Production Company, Chevron USA, Harvard Petroleum, Maralo, Inc., and Matador Operating Company.

2.5.2 Drilling Activities Outside the Nine-Township Area

In the New Mexico portion of the Delaware Basin outside of the nine-township area, there were 103 new wells spudded during the reporting period of September 1, 2003 through August 31, 2004. Of the 103 wells, 86 were located in Eddy County and 17 were in Lea County. Most of the wells drilled in the vicinity of Carlsbad tend to be gas wells and the ones drilled closer to the nine-township area are mostly oil wells when completed.

In the Texas portion of the Delaware Basin, 100 new wells were spudded during the reporting period. The DBDSP monitors drilling activities in portions of seven counties and all of one county (Loving).

The breakdown of new well activity in Texas is as follows:

Brewster County	0 wells
Culberson County	9 wells
Jeff Davis County	0 wells
Loving County	30 wells
Pecos County	10 wells
Reeves County	30 wells
Ward County	21 wells
Winkler County	0 wells

2.6 Castile Brine Encounters

WIPP PA included the assumption that a borehole results in the establishment of a flow path between the repository and a pressurized brine pocket that might be located beneath the repository in the Castile Formation. Research was performed in an attempt to verify this assumption. Studies recorded a total of 27 encounters with pressurized brine in the Castile Formation; of these, 25 were hydrocarbon wells scattered over a wide area in the vicinity of the WIPP Site. Two wells, ERDA 6 and WIPP 12, were drilled in support of WIPP Site characterization.

As indicated earlier, the search of the records performed in 1999 for instances of air drilling also looked for instances of pressurized brine. Although the search of the records noted a number of instances of encounters with sulfur water and brine water, none but the original 27 were found to have been pressurized brine encounters in the Castile Formation.

The DBDSP researches the well files of all new wells drilled in the New Mexico portion of the Delaware Basin each year looking for instances of encounters with pressurized brine. The program also sends out an annual survey to operators of new wells asking if they encountered pressurized brine during the drilling process. As of this report, none of the records reviewed indicated encounters with pressurized brine during the drilling process on new wells spudded in the New Mexico portion of the Delaware Basin between September 2003 and August 2004.

While performing field operations in December 2003, WIPP Site personnel were informed of a possible Castile Brine encounter during the drilling of the Apache "13" Federal #3 located in T22S-R30E-13. Strong water flow with blowing air was encountered at 2,850-3,315 feet. H₂S was recorded at 362 ppm. At the first encounter of H₂S, the well was shut in for several hours while additional monitoring equipment was installed. The water flow had no impact on drilling operations.

Of the six Castile Brine encounters recorded since the 1996 CCA, five were picked up when WIPP Site personnel performing field work talked to area drillers. The other encounter was reported by an operator in the Annual Survey of area drillers. All the new encounters have been in areas where Castile Brine is expected to be encountered during the drilling process. Table 7 shows all known Castile Brine encounters in the vicinity of the WIPP Site.

2.7 Borehole Permeability Assessment - Plugging Practices

The hydrocarbon well plugging practices used for the borehole permeability assessment remain valid. The regulations in place during the submittal of the CCA and the CRA have not changed. The assessment will not change unless the regulations change to allow a different method of plugging. Regulations require the well be plugged in a manner that will permanently confine all oil, gas, and water in the separate strata in which they were originally found. These regulations require a notice of intent to plug from the operator. This notice includes a diagram of the well

bore and the placement of the plugs. A 24-hour notice to the NMOCD or to the Bureau of Land Management (BLM) is required before plugging may commence.

Most of the wells to the south and west of the WIPP Site are in the Known Potash Leasing Area (KPLA). Under R-111-P regulations, the operator is required to provide a solid cement plug through the salt section and any water-bearing horizon in addition to installing a bridge plug above the perforations. Installing a solid cement plug through the salt is to prevent liquids or gases from entering the hole above or below the salt section.

In the New Mexico portion of the Delaware Basin, the DBDSP retrieves a copy of the plugging report from the NMOCD Internet site when a well has been plugged and abandoned. This information is added to the records maintained by the DBDSP on each well drilled within the Delaware Basin. By maintaining records in such a fashion, should the regulations change and the plugging methods differ from what is now occurring, a trend would be noticed and the borehole permeability assessment revisited. Table 8 shows various plug information on the wells plugged and abandoned within the New Mexico portion of the Delaware Basin in the last year.

CCA Appendix MASS, Attachment 16-1 describes the development of a conceptual model for long-term performance of plugged boreholes. The study did not attempt to predict the effectiveness of plugs, but to identify the location and physical characteristics of plugs which might be important to performance assessment. Guidance in 40 CFR 194 states that “Performance assessments should assume that the permeability of sealed boreholes will be affected by natural processes, and should assume that the fraction of boreholes that will be sealed by man equals the fraction of boreholes which are currently sealed in the Delaware Basin.” The criteria also state that “...drilling practices will remain as those of today.” Only wells plugged in the New Mexico portion of the Delaware Basin were used for the study and only wells drilled after 1988, when the current plugging regulation went into effect, were used. The results of this study indicated that PA should assume a 100% plugging frequency.

To determine the typical configuration and composition of a borehole plug, the study considered both current drilling and plugging practices to arrive at a model depicting six different types of plugging configurations (see Figure 4):

- Type I Plugs will be located at the transition between the surface and intermediate casings and the transition between the intermediate and production casings. This area is usually the top of the Salado Formation and the bottom of the Castile Formation, roughly 800 feet and 4,000 feet below the surface.

- Type II This plugging configuration has a portion of the production casing salvaged. Where the production casing was cut a plug must be installed. If a plug occurs between 2,150 and 2,700 feet (above the hypothetical brine pocket) and the other plugs occur at the top of the Salado Formation and below the Castile Formation, it is considered a Type II configuration.

- Type III This configuration is the same as above except the removed production casing plug occurs above 2,150 feet.
- Type IV Extra plugs, in addition to those of Type II, have been emplaced above 2,150 feet.
- Type V The minimum regulatory requirements require a surface plug and a plug occurring at the bottom, provided no water-bearing zones were encountered. This type of plugging configuration is not common.
- Type VI This configuration has a solid cement plug through a significant portion of the salt section. This configuration, like the others, may have additional plugs above and below the salt-section plug.

There were five hydrocarbon wells, with one located in the R-111-P area, plugged in the nine-township area during the reporting period and 20 others outside the nine-township area. All 25 wells will be used in the permeability assessment update (see Table 9).

2.8 Seismic Activity in the Delaware Basin

The DBDSP records in a database and on a map known seismic events occurring in Southeast New Mexico and West Texas, specifically that of the Delaware Basin. This information is provided every quarter in a report from New Mexico Institute of Mining and Technology, Socorro, New Mexico, which utilizes an array of seven seismographs in the vicinity of the WIPP Site.

During the reporting period, one event occurred in the Delaware Basin, in Culberson County, Texas and reported a 1.3 magnitude. Table 10 provides information on recorded events which have occurred in the Delaware Basin.

2.9 Secondary and Tertiary Recovery

Secondary recovery is defined by the oil industry as the first improved recovery method of any type applied to a reservoir to produce oil not recoverable by primary recovery methods. Waterflooding is one such method. This method involves pumping water through the existing perforations in a well in which production has decreased sufficiently to merit stimulation. As the water is pumped into a formation, it stimulates production of oil or gas in other nearby wells. This is a proven method of recovering hydrocarbons that otherwise would be economically unretrievable. Waterflooding has been a popular form of secondary recovery for over 40 years. Waterflooding can be accomplished by one injection well or several injection wells in the immediate vicinity of other producing wells.

In the New Mexico portion of the Delaware Basin, there are three major waterflood projects and several one and two injection well operations. One of the major waterflood projects in the area is the El Mar, located in T26S-R32E, on the Texas border. At one time, this project (currently operated by Sahara Operating) had 31 permitted injection wells. Currently, there are only two wells actively injecting water. The remaining wells are either shut-in (not being used) or plugged and abandoned. The operation for the El Mar project has not changed since last year except for the change in ownership. The Paduca waterflood project, located in T25S-R32E, has 19 permitted injection wells with ten (up from eight this time last year) injecting water into the formation. The third major waterflood project in this area (Indian Draw), located in T22S-R28E, is not currently injecting into any of its permitted wells. At this time last year, this facility was injecting into nine of the ten permitted wells.

Tertiary recovery is defined by the oil industry as the use of any improved recovery method to remove additional oil after secondary recovery. One method of tertiary recovery practiced in the industry, where conditions permit, is the injection of carbon dioxide (CO₂) into the formation. This consists of injecting a prescribed amount of CO₂ into the reservoir followed by an injection of water and a subsequent injection of CO₂. At the time of this report, there are no known CO₂ injection wells or tertiary recovery projects being operated in the vicinity of the WIPP Site, although several are being operated by oil companies in the Texas portion of the Delaware Basin.

2.9.1 Nine-Township Injection Wells

Secondary recovery projects occurring in the nine-township area are on a small scale. There are six injection wells, no change from this time last year, located in the nine-township area surrounding the WIPP Site. Phillips Petroleum operates two injection wells, James "A" #3 and #12, located in section 2-T22S-R30E, northwest of the site. Both are active and injecting near the maximum permitted pressure of 945 psi for #3 and 1,120 psi for #12. Both first injected water in the early 1990s. The other four injection wells are operated by Pogo Producing Company. The Neff Federal #3 is located in section 25-T22S-R31E. This well went on-line in 1995 and has injected approximately 4,971,521 barrels (3,807,382 barrels this time last year) of water at a maximum permitted pressure of 1,410 psi. The Pure Gold "B" Federal #20 (23S-31E-

20) has injected 244,642 barrels to date but is currently sitting idle. The third Pogo well (Prize Federal #4 located in 22S-32E-27) currently sits idle and no injection data have been reported at this time. The fourth Pogo well (State "2" #5 located in 22S-31E-02) was permitted in 2003 but has yet to start actively injecting. All six wells are or will be injecting into the Brushy Canyon Formation of the Delaware Mountain Group at approximately a depth of 7,200 feet. Figure 5 shows a typical injection or salt water disposal well configuration.

2.9.2 Nine-Township Salt Water Disposal Wells

The most common type of injection well is for the disposal of brine water coming from the producing formation in oil and gas wells. Figure 6 shows the location of active injection and salt water disposal wells in the nine-township area. Most producing oil and gas wells produce water along with oil or gas. Salt Water Disposal (SWD) wells have become necessary as a result of the EPA's ruling that formation water may no longer be disposed of on the surface. The oil companies now dispose of this water by injecting it into approved SWD wells.

There are currently 36 SWD wells, an increase of one over the last year, operated by 12 companies (12 companies in 2003) located in the nine-township area surrounding the WIPP Site. Two operators, Devon Energy and Pogo Producing, operate the majority of the SWD wells. Injection depths range from 3,800 to 8,200 feet. During the last year, all operated within their maximum permitted injection pressure. The volume of disposed brine water depends on the number of producing wells maintained by the operator in the immediate vicinity of the SWD well. Table 11 provides disposal information on all SWD and injection wells in the nine-township area.

2.10 Pipeline Activity

Pipeline activity is monitored in the nine-township area, specifically within a five mile radius of the WIPP Site. Only pipelines of permanent construction, such as buried rigid metal pipelines, are of concern to the DBDSP. Many oil, gas, and SWD wells are connected to tank batteries by gathering systems constructed of poly flowlines (flexible plastic pipe) that may or may not be buried. These flowlines are semi-permanent. When they are no longer needed, they are removed for use elsewhere. This type of pipeline activity is not monitored by the DBDSP. Metal pipeline activity is of interest because it will be around for a long time thus requiring the locations of these pipelines to be documented. Only natural gas and water pipelines are located within the immediate vicinity of the WIPP Site. The natural gas pipelines are owned and operated by three companies, El Paso Natural Gas Company, Natural Gas Pipeline Company of America, and Transwestern Pipeline Company.

One type of pipeline activity of major concern to the DBDSP is CO₂ pipelines. A form of tertiary recovery of oil discussed previously uses CO₂. An indicator of this form of recovery would be the construction of a CO₂ pipeline in the area. Currently, there are no CO₂ pipelines within the New Mexico portion of the Delaware Basin. The nearest CO₂ pipeline is located south of the WIPP Site in the Texas portion of the Delaware Basin.

2.11 Mining

Resources found in the Delaware Basin that can be mined are potash, sulfur, caliche, gypsum, and halite. Potash and sulfur are present in quantities large enough to be mined profitably. Only caliche, of the other resources available, is economically extracted from the earth in conventional mining methods. Caliche is mainly used in the construction of pads for oil and gas well drilling rigs.

2.11.1 Potash Mining

Potash mining in the immediate vicinity of the WIPP Site continues as reported in Appendix DEL of the CCA and Appendix DATA of the CRA. Figure 7 shows the location and the extent of mining of the potash mines in the vicinity of the WIPP Site. There have been several changes to the companies that operate in the area, most notably, only two potash mining companies remain in operation. No plans have been promulgated by either company to sink new shafts or encroach upon the potash reserves identified in Appendix DEL.

In August 1996, Mississippi Potash (a subsidiary of Mississippi Chemical Corporation) purchased all the assets of New Mexico Potash Corporation and Eddy Potash, Inc. These plants were renamed Mississippi East and Mississippi North, respectively. In early 2004, Mississippi Potash sold its Carlsbad properties to Intrepid Mining LLC, a Denver based mining company, which will continue to produce potash fertilizer from its mines and refineries.

The other potash producer in the area, IMC Kalium Potash, is a wholly-owned subsidiary of IMC Global. Western Ag-Minerals was purchased by IMC Global September 1997. This acquisition doubled the potash reserves for IMC Kalium and increased their other reserves by 30 percent. IMC Global merged with Freeport-McMoRan, a major world potash producer, in December 1997 with IMC Global as the surviving entity in the transaction.

2.11.2 Sulfur Extraction

The only viable sulfur mining activity within the Delaware Basin was conducted by Freeport-McMoRan Sulphur, Inc., a wholly-owned subsidiary of McMoRan Exploration Company. The mine is located in Culberson County, Texas. The mine recovered sulfur utilizing the Frasch process (solution mining) which consists of a hole drilled into the sulfur bearing formation and then cased. The next step involves the placement of three concentric pipes within the protective casing to facilitate pumping superheated water down the hole, melting the sulfur, and recovering the molten sulfur to the surface. The Culberson mine was operated until it permanently ceased production on June 30, 1999. Abandonment and salvage operations continued until the early summer of 2000.

Recently, a number of sulfur exploration coreholes were found in the BLM records. These coreholes were drilled in the late 1960s through the early 1980s in the Yeso Hills near Washington Ranch in the far southwest corner of the New Mexico portion of the Delaware

Basin. These coreholes have yet to be added to the databases. All were shallow (less than 2,150 feet) drilling events that were conducted for various small operators. There have been no reports on whether any of the holes encountered sufficient quantities of mineable sulfur.

2.11.3 Solution Mining

Solution mining is the process by which water is injected into a mineral formation, circulated to dissolve the mineral, and the solution then pumped back to the surface where the minerals are removed from the water, usually by evaporation. There are several brine mines or wells in the area, three in New Mexico and nine in Texas (see Figure 8), that use this process to provide a brine solution for area drilling operators to use in the drilling process. These are all shallow wells using injected fresh water to dissolve salt into a brine solution.

In early 1997, Mississippi Potash proposed to set up a pilot potash solution mining project at the former Eddy Potash mine located north of the WIPP Site and outside of the Delaware Basin. The BLM was provided with all of the necessary documentation to acquire a permit to operate the pilot project, but the project was postponed. In March 2002, Mississippi Potash again applied for a permit to operate a pilot potash solution mining project. In May 2002, the project was given approval to proceed by the BLM though the project has not been started. If the project is initiated, it will be approximately three acres in size. Although this project is outside of the Delaware Basin, it will be closely followed because of its importance to possible future activities of this kind that might occur in the Delaware Basin. There has been no change in the status of this project, it is still on hold. The new owner of Mississippi Potash, Intrepid Mining LLC, is reviewing its options for this project.

In the late 1960s, Conoco Minerals installed a pilot solution mining project on leases it held on the former AMAX property north of the Delaware Basin and the WIPP Site. The project was designed to test solution mining of potassium minerals and consisted of one injection well and three withdrawal wells, but the potash ore zone was deemed too thin to make this method viable.

2.11.4 Brine Wells

Brine wells are classified as Class II injection wells. In the Delaware Basin, the process involves injecting fresh water through the wells into a salt formation to create a saturated brine solution, which is then extracted and used as a drilling agent when drilling a new well. These wells are tracked by the DBDSP on a continuing basis. Recently, while investigating the status of an idle Salt Water Disposal well at the OCD office, records were found within the file for the idle well, which indicated the presence of a permitted brine well (for retrieval) and an injection well to inject fresh water into the salt formation. The DBDSP records have been updated to list these new wells. Table 12 provides the status of brine wells in the Delaware Basin.

2.12 New Drilling Technology

New drilling methods are researched by the DBDSP for impacts to the drilling methods currently used in the area. To date, no new methods of drilling have been identified or implemented in the vicinity of the WIPP Site.

3.0 Survey of Well Operators for Drilling Information

The WIPP Project surveys local well operators annually to acquire information on drilling practices normally not available on the Sundry notices supplied to the local state and federal offices by the operator or through commercial sources maintained by the DBDSP. Participation in the survey is voluntary. This survey requests information on other items of interest to the WIPP such as hydrogen sulfide (H₂S) encounters, Castile Brine encounters, or whether any section of the well was drilled with air. The DBDSP personnel review the records on all new wells drilled to look for the above data. The survey provides an additional source of information on drilling activities in the New Mexico portion of the Delaware Basin.

The first survey of area operators was performed July 1999 and has continued being sent out each July until this year. An annual survey was not performed this year due to schedule conflicts with the Compliance Recertification Application. The survey has been moved to January 2005 and will continue to be performed in January of each year. With this change, all results from the annual survey will be able to be included in the annual report for that year.

4.0 Summary - 2004 Delaware Basin Drilling Surveillance Program

- Drilling practices continue to be the same.
- No new instances of air drilling.
- One Castile Brine encounter reported.
- The drilling rate has increased to 54.2 boreholes per square kilometer.
- Mississippi Potash sold its assets to Intrepid Mining LLC.
- No change in solution mining activities.
- No change in injection and salt water disposal activities.
- Forty-six wells spudded in the nine-township area.
- One hundred three wells spudded outside the nine-township area in New Mexico.
- One hundred wells spudded in the Texas portion of the Delaware Basin.

5.0 References

B. L. Resources, *Monthly Injection & Saltwater Report for Southeast New Mexico*, April 2004

New Mexico Bureau of Mines and Mineral Resources, 1995, *Evaluation of Mineral Resources at the Waste Isolation Pilot Plant*, Final Report, Vols. I-IV

New Mexico Institute of Mining and Technology, Seismicity of the WIPP Site for the Period April 1, 2004 through June 30, 2004, Socorro, New Mexico

New Mexico Junior College, 1995, *Analytical Study of an Inadvertent Intrusion of the WIPP Site*, Hobbs, New Mexico

Ross Kirkes, *Current Drilling Practices Near WIPP*, 1998. EPA Air Docket No. A-93-02, IV-G-7, January 22, 1998

The University of Texas, Petroleum Extension Service, Division of Continuing Education, 1986, *Fundamentals of Petroleum*, Third Edition

The University of Texas, Petroleum Extension Service, Division of Continuing Education, 1991, *A Dictionary for the Petroleum Industry*, First Edition

U.S. Department of Energy, DOE/WIPP-99-2308, Rev. 4, *Delaware Basin Monitoring Annual Report*, September 2003

U.S. Department of Energy, 1996, *Inadvertent Intrusion Borehole Permeability*, Prepared by T.W. Thompson, W.E. Coons, J.L. Krumhansl, and F.D. Hansen

U.S. Department of Energy, DOE/WIPP-97-2240, *Injection Methods: Current Practices and Failure Rates in the Delaware Basin*, June 1997

U.S. Department of Energy, DOE/CAO-1996-2184, *Title 40 CFR Part 191 Compliance Certification Application for the Waste Isolation Pilot Plant*, October 1996

U.S. Department of Energy, DOE/WIPP 2004-3231, *Title 40 CFR Part 191 Compliance Recertification Application for the Waste Isolation Pilot Plant*, March 2004

U.S. Environmental Protection Agency (EPA), 1996. *Title 40 CFR Part 194, Criteria for the Certification and Re-Certification of the Waste Isolation Pilot Plant's Compliance with the 40 CFR Part 191 Disposal Regulations*

Washington TRU Solutions LLC, WP 02-PC.02, Rev. 1, *Delaware Basin Drilling Surveillance Plan*, July 2004

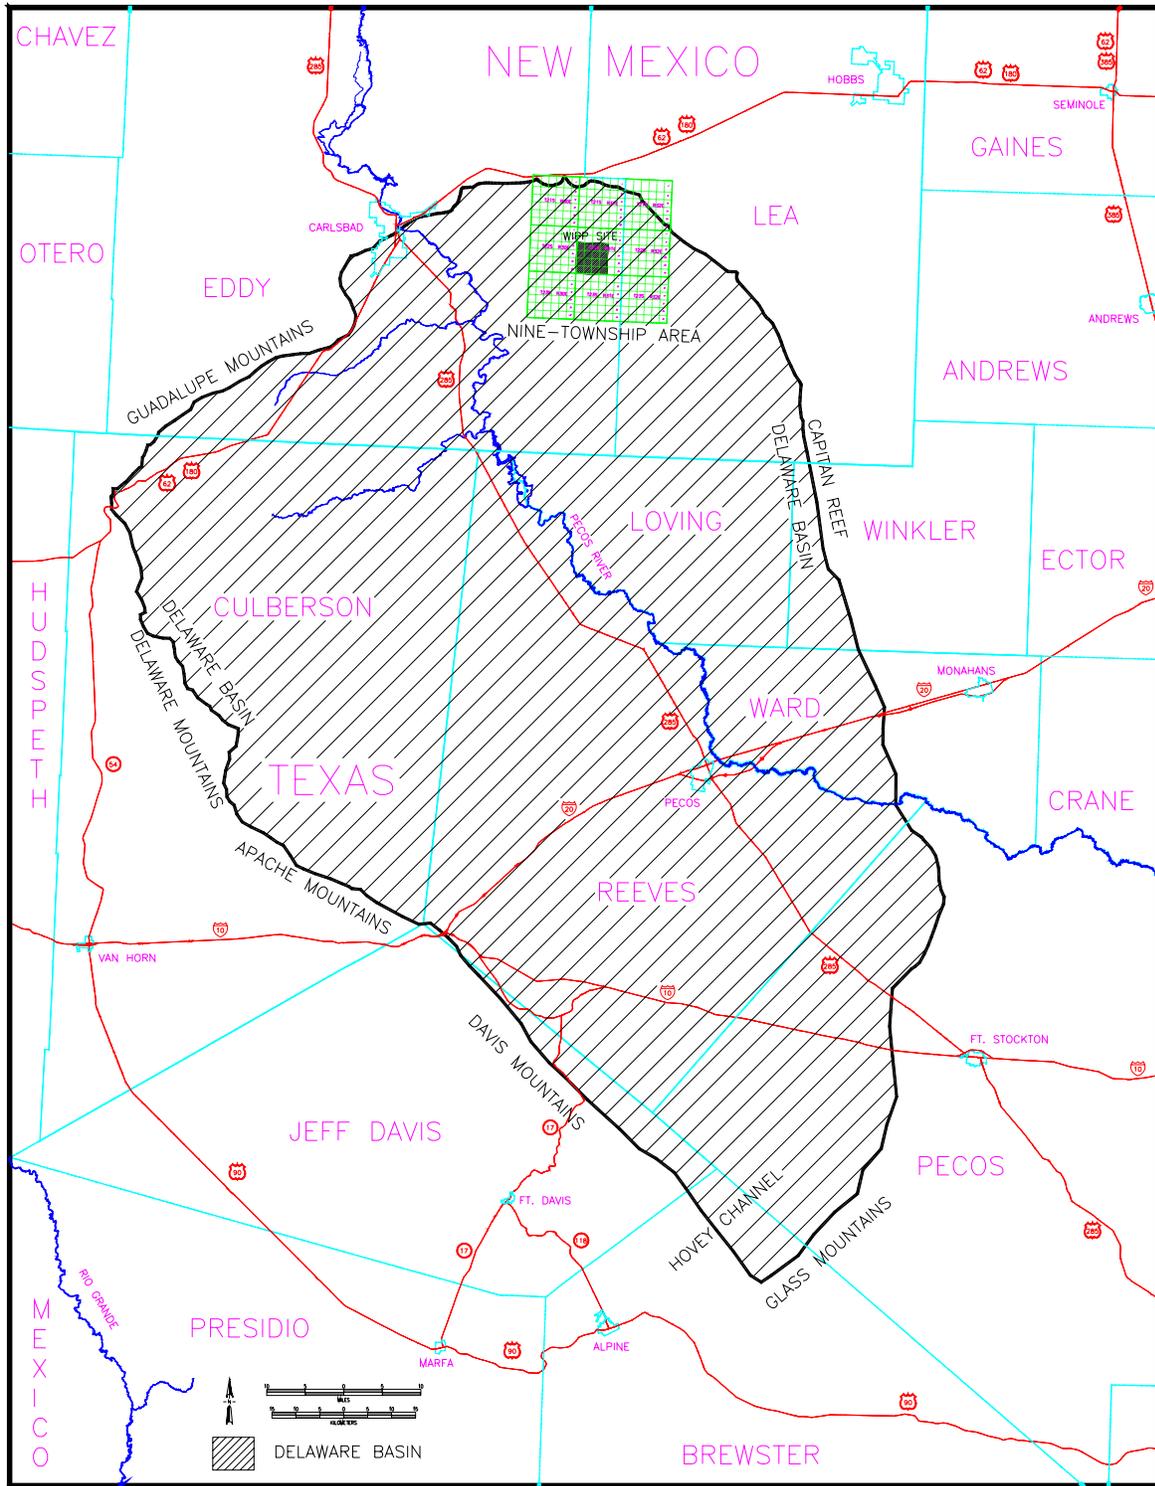


FIGURE 1
WIPP Site, Delaware Basin, and Surrounding Area

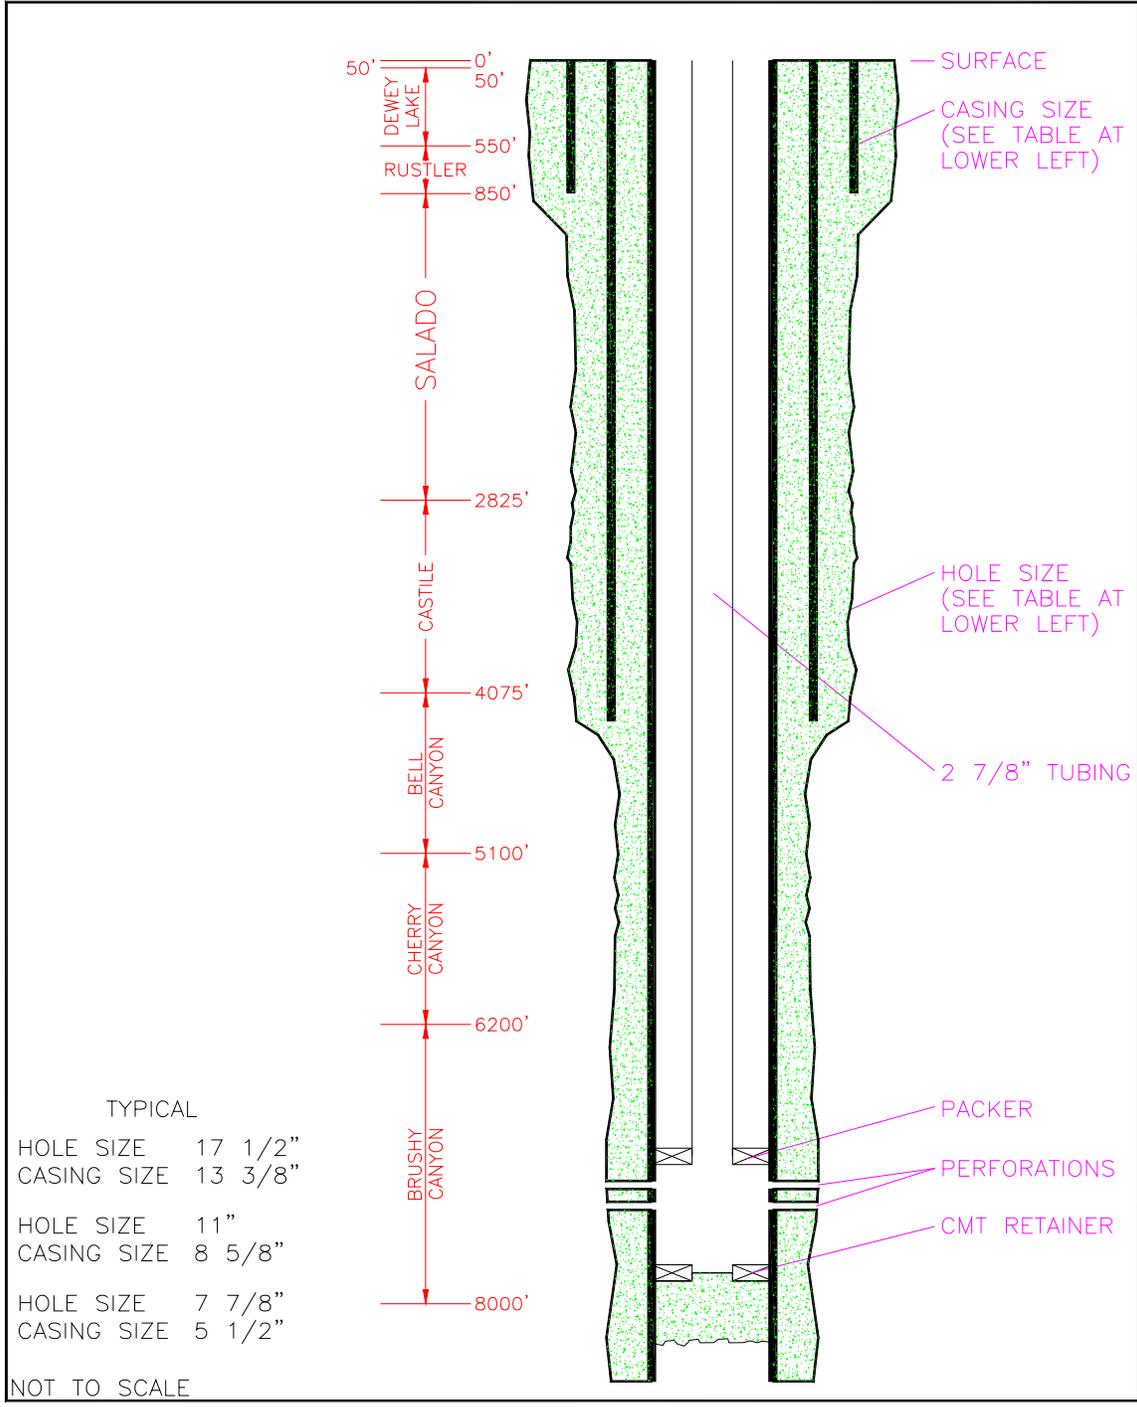


FIGURE 2
Typical Well Structure and General Stratigraphy Near the WIPP Site

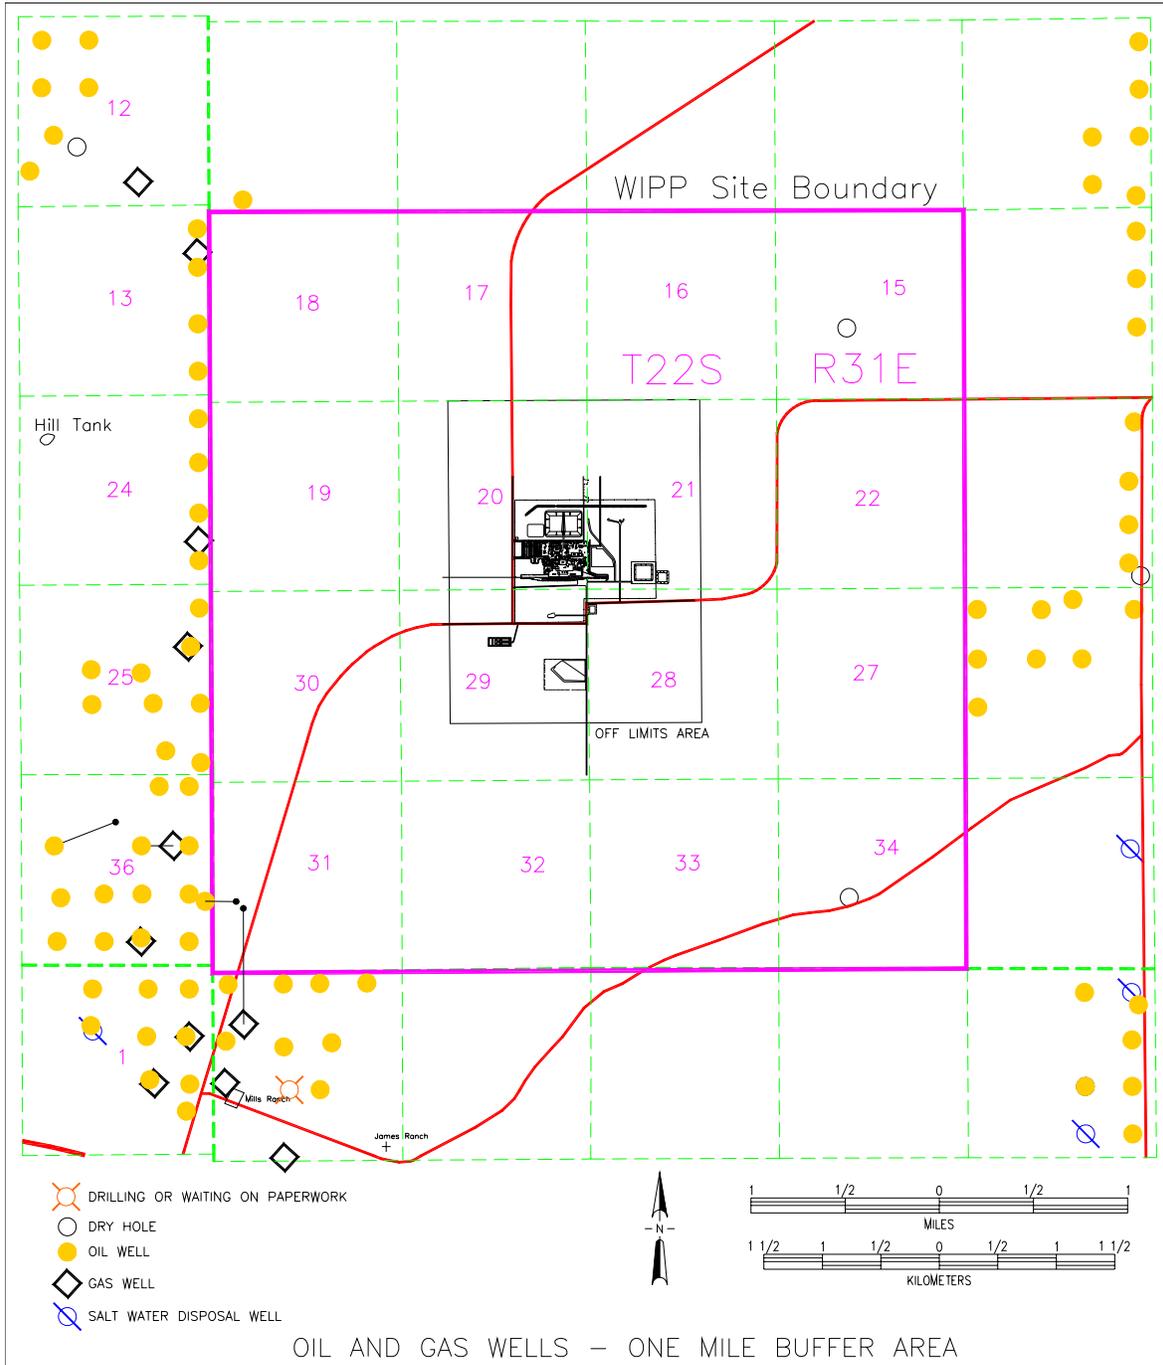


FIGURE 3
Oil and Gas Wells Within One Mile of the WIPP Site

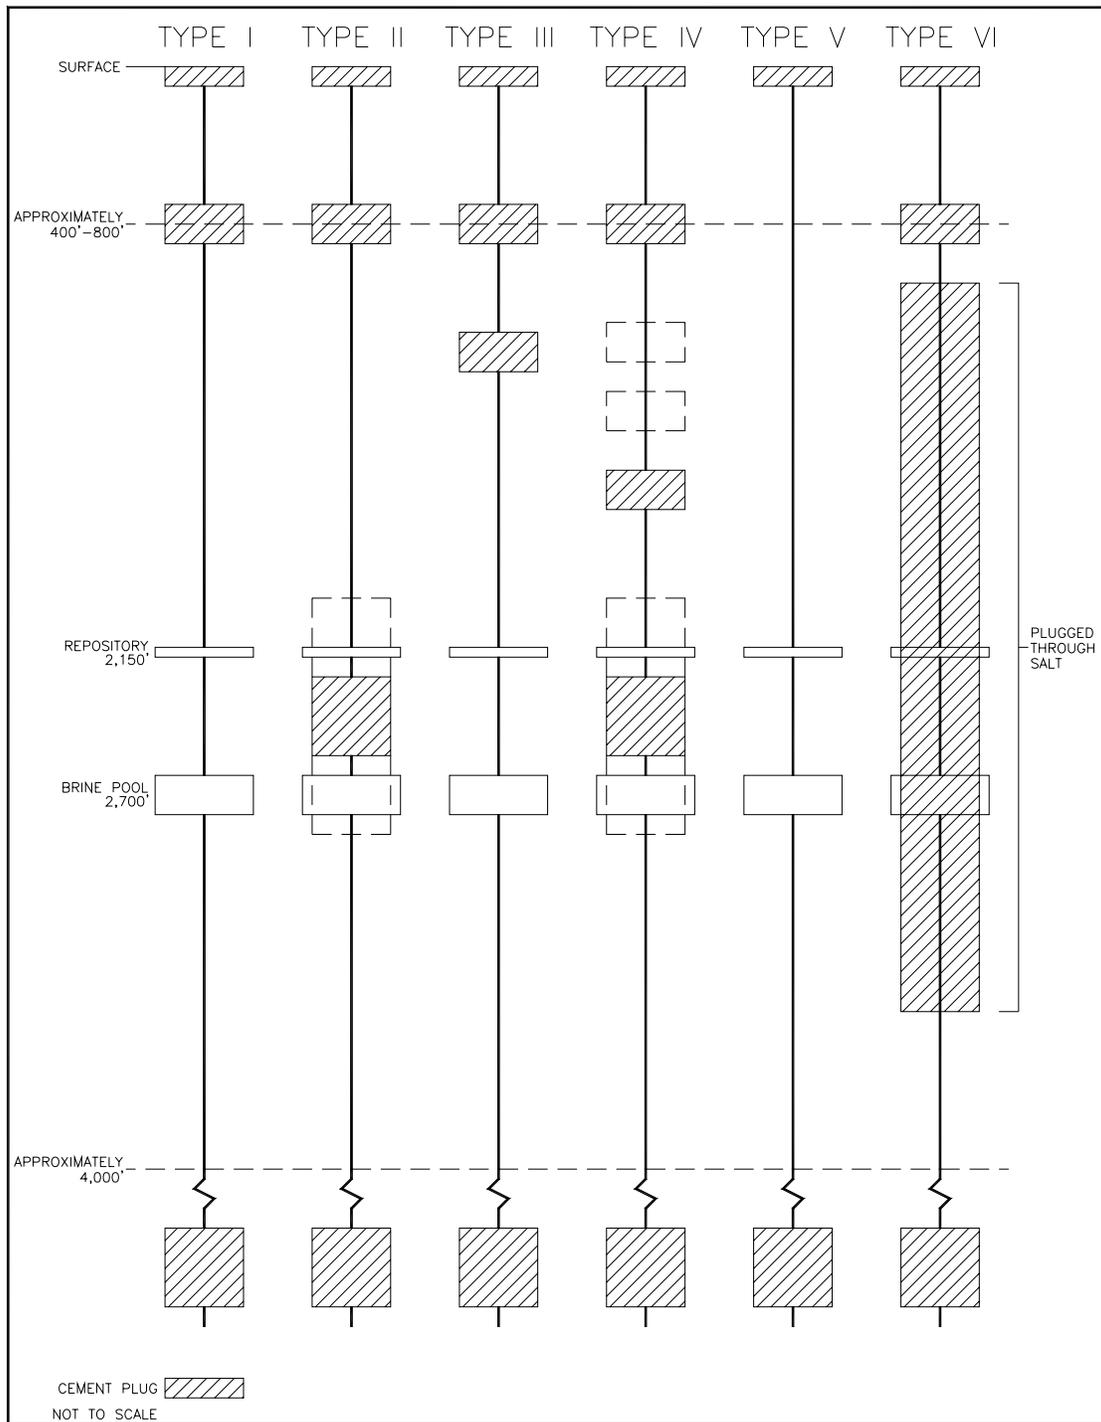


FIGURE 4
Typical Borehole Plug Configurations in the Delaware Basin

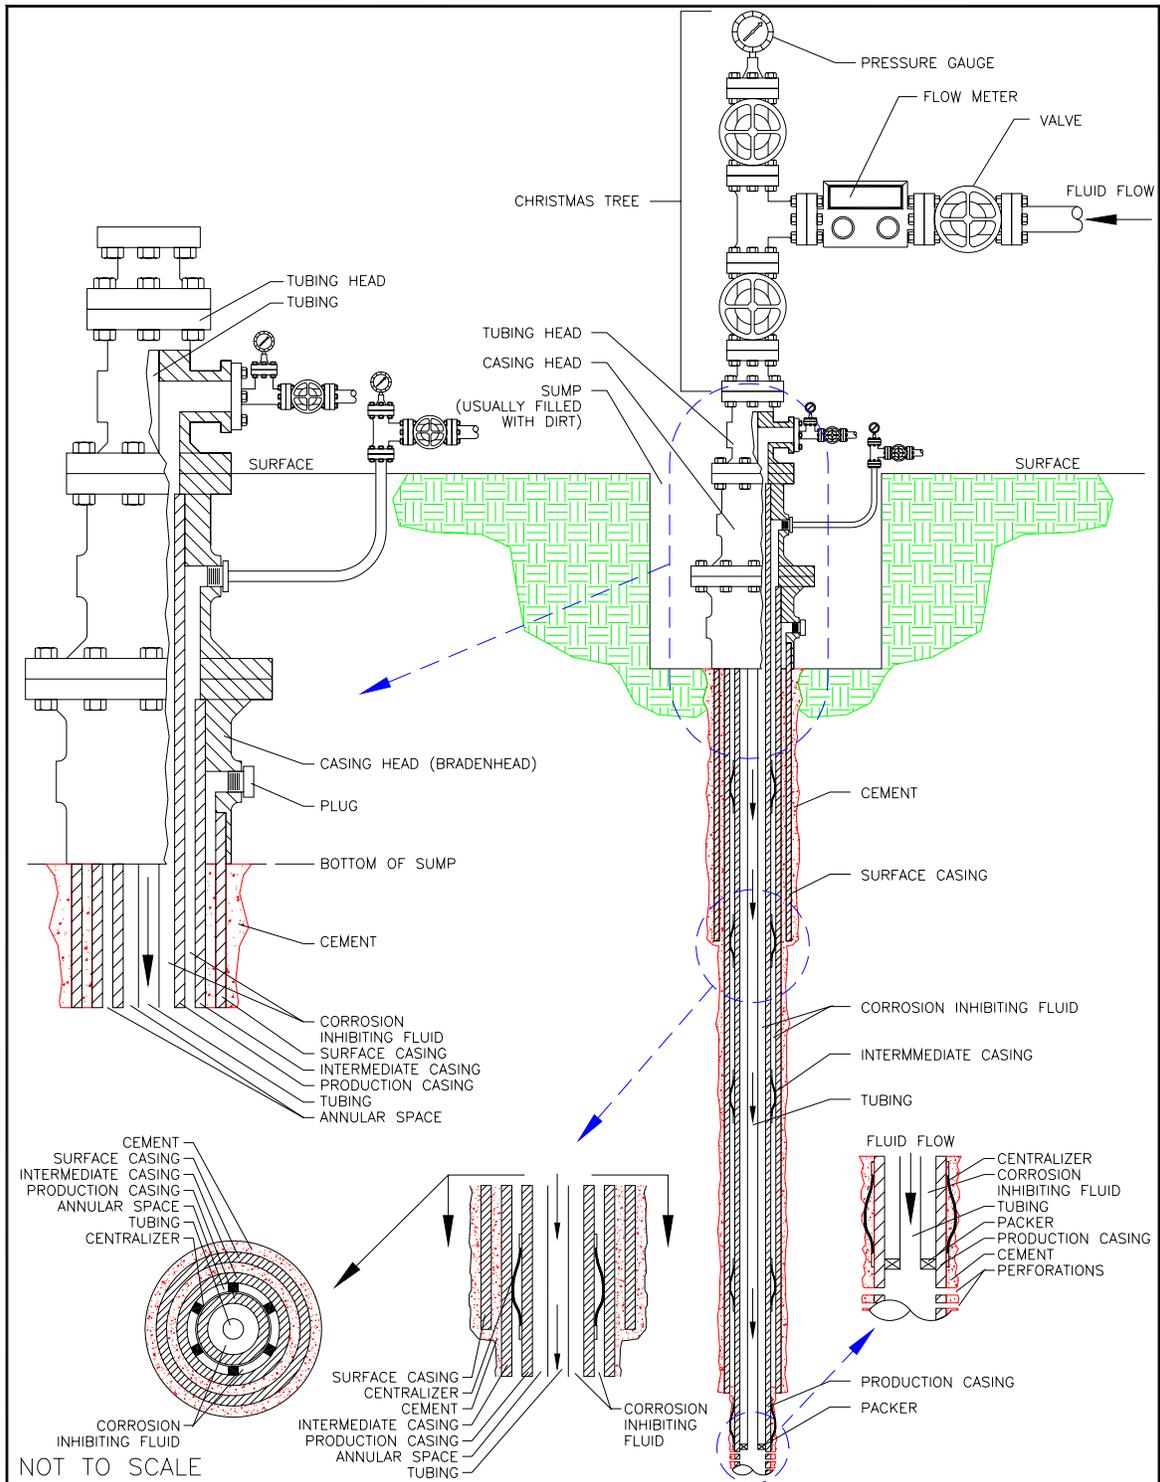


FIGURE 5
Typical Injection or Salt Water Disposal Well

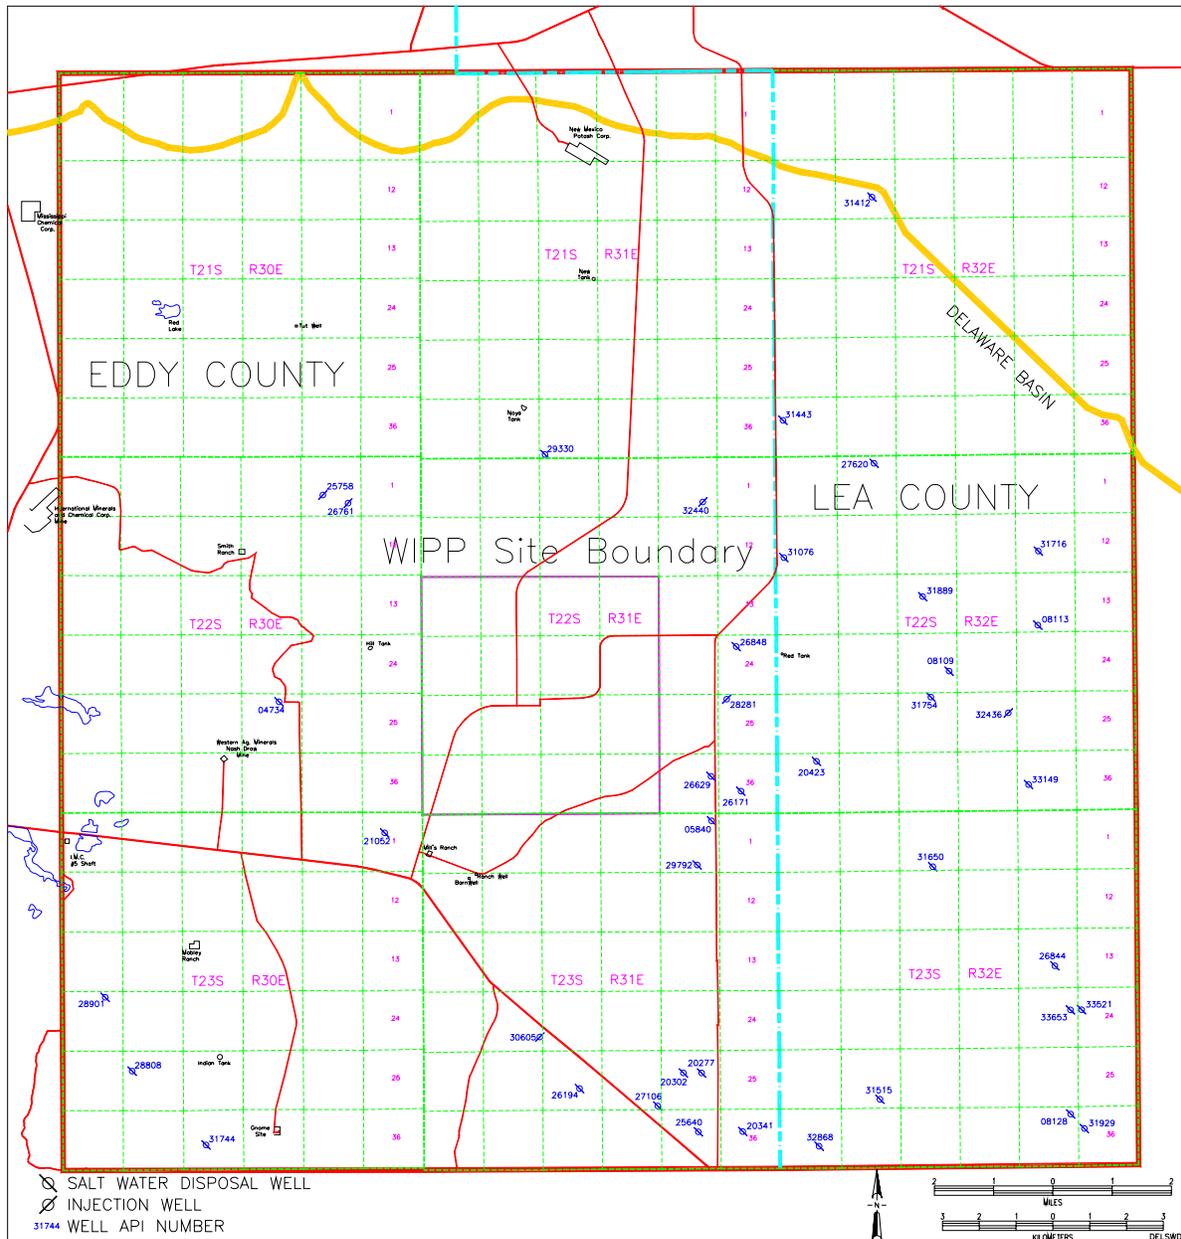


FIGURE 6
Active Injection and SWD Wells in the Nine-Township Area

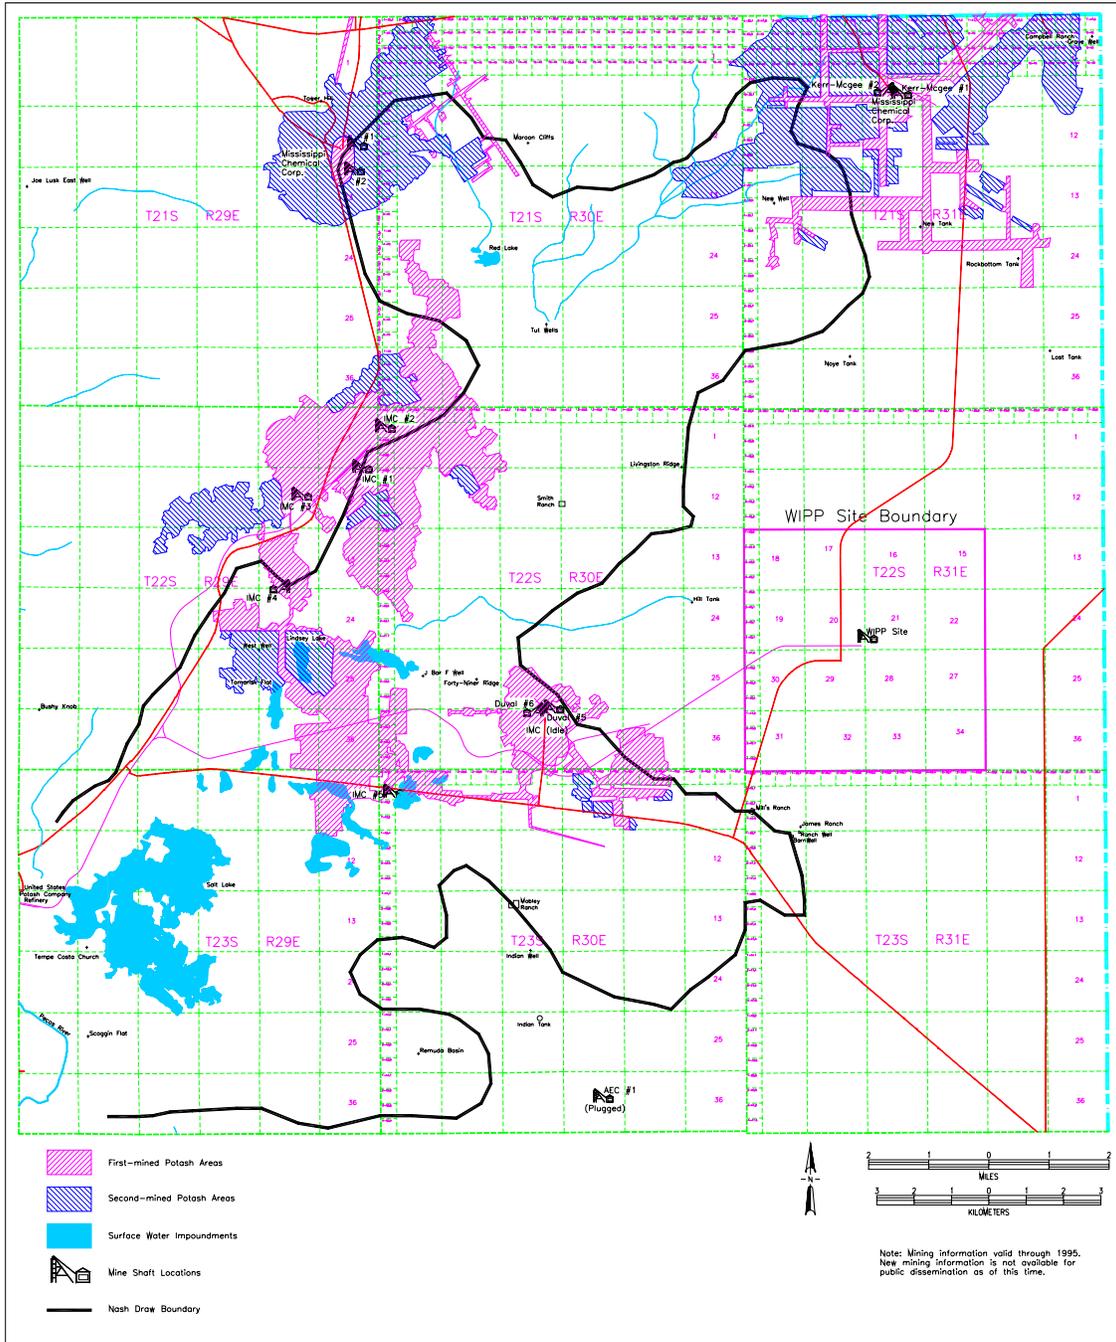


FIGURE 7
Potash Mining in the Vicinity of the WIPP Site

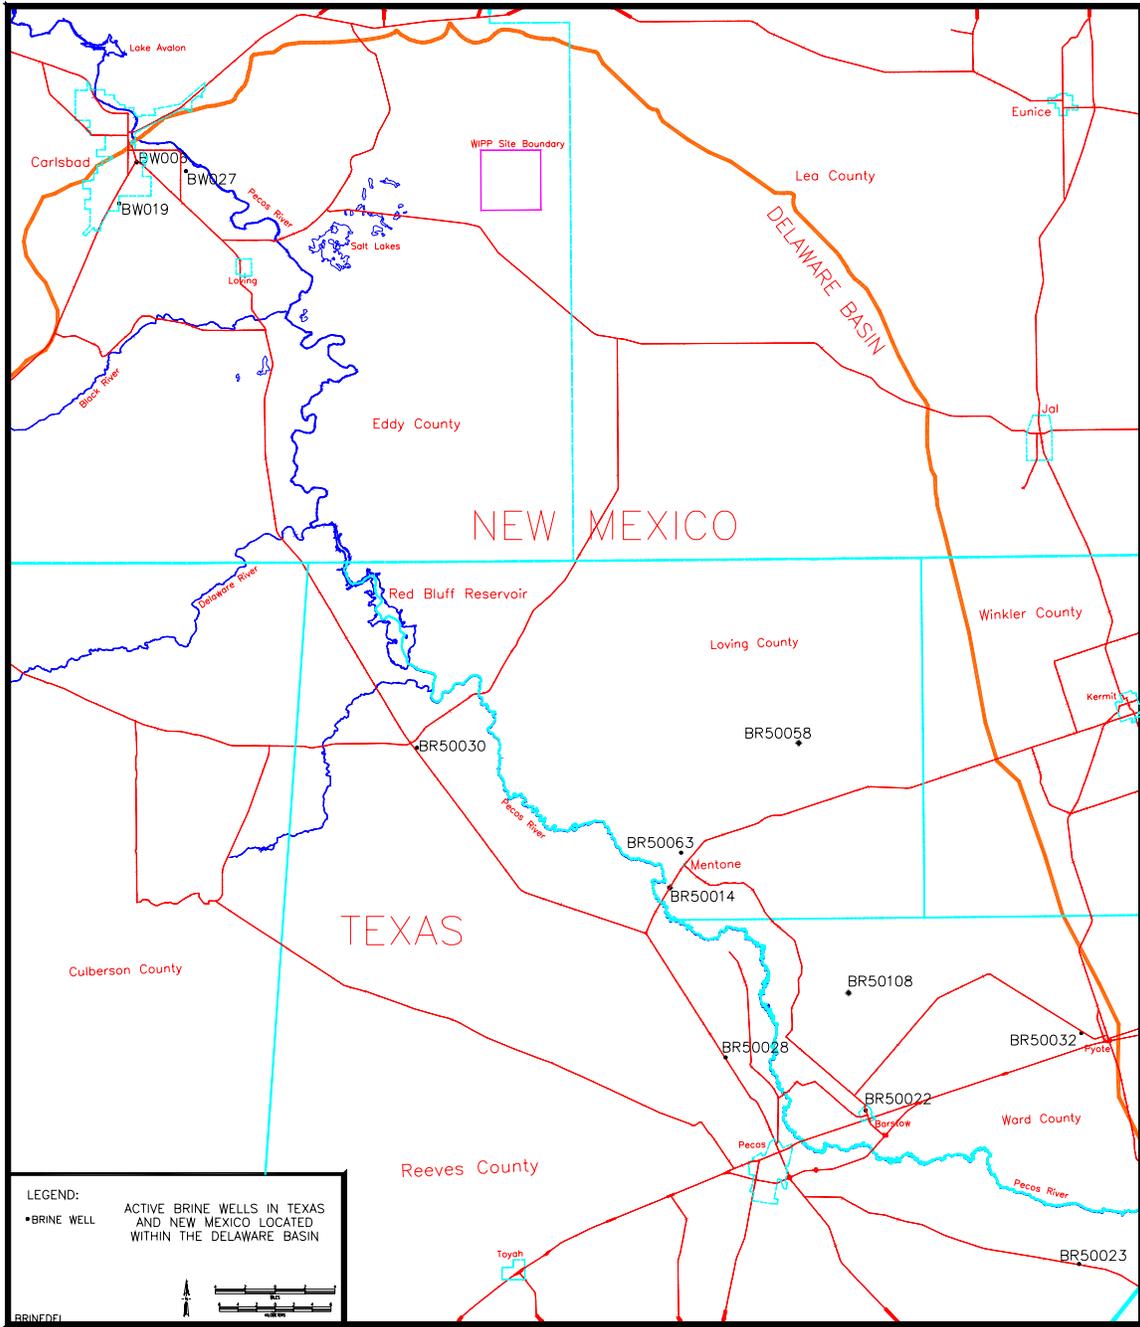


FIGURE 8
Active Brine Well Locations in the Delaware Basin

TABLE 1
Nine-Township Area Casing Sizes

Casing Size	Surface Casing	Intermediate Casing	Production Casing
13 3/8"	35	0	0
11 3/4"	0	0	0
9 5/8"	0	0	0
8 5/8"	0	35	0
7"	0	0	0
5 1/2"	0	0	35

NOTE: There were 46 wells drilled in the nine-township area between September 1, 2003 and August 31, 2004. Thirty-five of the wells had complete records available on casing sizes. The other 11 wells had partial records available or had just recently been spudded.

TABLE 2
Nine-Township Area Bit Sizes

Bit Size	Surface Hole	Intermediate Hole	Production Hole
17 1/2"	35	0	0
14 3/4"	0	0	0
12 1/4"	0	0	0
11"	0	35	0
7 7/8"	0	0	35

NOTE: Of the 46 wells drilled in the nine-township area, complete records were available on 35 wells. The other 11 wells did not have records available on bit sizes.

TABLE 3
Air-Drilled Wells in the New Mexico Portion of the Delaware Basin

#	Location	Well Name and No.	Spud Date	Status	Well Information
<i>Wells Drilled Prior to Submittal of the 1996 CCA With Some Portion Drilled by Air.</i>					
1	21S-28E-33	Richardson & Bass #1	07/27/1961	P&A	Air drilled through the salt. Between 2,545' and 2,685' encountered water and changed from air to mud-based drilling.
2	21S-32E-26	Lincoln Federal Unit #1	04/01/1991	P&A	Lost circulation at 1,290'. Hole was dry drilled to 1,792'. Supposedly, air drilled from 2,984' to 4,725'.
3	23S-26E-17	Exxon "17" Federal #1	08/01/1989	Gas Well	Air drilled through the salt from 575' to 2,707'.
4	23S-28E-11	CP Pardue #1	10/28/1958	P&A	Air drilled through the salt from 390' to 2,620'.
5	23S-28E-11	Amoco Federal #1	08/04/1979	Oil Well	Air drilled from 475' to 9,700'.
6	23S-28E-11	Amoco Federal #3	02/28/1980	Oil Well	Air drilled from 6,271' to 9,692'.
7	23S-28E-23	South Culebra Bluff Unit #3	01/21/1979	Oil Well	Air drilled from 6,345' to 8,000'.
8	23S-28E-23	South Culebra Bluff Unit #4	08/09/1979	Oil Well	Air drilled from 450' to 9,802'.
9	24S-31E-03	Lilly "ALY" Federal #2	05/01/1994	Oil Well	Air drilled conductor hole to 40'.
10	24S-31E-03	Lilly "ALY" Federal #4	05/16/1994	Oil Well	Air drilled conductor hole to 40'.
11	24S-34E-04	Antelope Ridge Unit #2	09/13/1962	Gas Well	Attempted to drill with gas. Had to convert to water at 1,035'. Tried again several times at different depths.
12	24S-34E-09	Federal "9" Com #1	12/03/1963	Gas Well	Hit water while gas drilling at 4,865'.
13	24S-34E-13	Federal Johnson #1	06/23/1958	P&A	Proposed to drill with air, but no information in the records indicate air drilling.
14	26S-32E-20	Russell Federal #1	03/16/1966	Oil Well	Drilled with air to 1,330'.
15	26S-32E-36	North El Mar Unit #44	02/19/1959	Oil Well	Proposed to drill with air, but no information in the records indicate air drilling.
<i>Wells Drilled after Supplemental Information Provided to the EPA Docket in 1997.</i>					
16	22S-26E-28	Sheep Draw "28" Federal #13	07/01/1997	Oil Well	Air drilled the first 358'.

NOTE: The research on "air drilling" is a continuous effort since every new well drilled is checked to determine if any portion of the well was drilled by air. A copy of all completion reports are on file for all wells completed within the New Mexico portion of the Delaware Basin.

TABLE 4
Shallow Well Status in the Delaware Basin

<i>Well Type</i>	<i>Texas</i>	<i>New Mexico</i>	<i>Totals</i>
Core Hole	31	2	33
Dry Hole	325	146	471
Gas Well	7	0	7
Injection Well	5	0	5
Junked and Abandoned Well	60	28	88
Oil Well	89	7	96
Oil and Gas Well	1	0	1
Plugged Gas Well	1	2	3
Plugged Oil Well	14	14	28
Plugged Brine Well	2	1	3
Plugged Salt Water Disposal Well	0	4	4
Drilling or Waiting on Paperwork	72	60	132
Brine Well	1	4	5
Salt Water Disposal Well	0	1	1
Service Well	13	0	13
Stratigraphic Test Hole	1,170	0	1,170
Sulfur Core Hole	502	0	502
Potash Core Hole	0	992	992
Water Well	1,706	590	2,296
WIPP Well	0	190	190
Other (Mine Shafts, Gnome Project Wells)	0	44	44
TOTALS	3,999	2,085	6,084

NOTE: Only the known holes that occur in the Delaware Basin, except several WIPP holes, are listed in the above table. The WIPP holes are shown for completeness. The 132 wells under the listing of "Drilling or Waiting on Paperwork" do not have an associated depth until one has been reported on paperwork. These are listed as shallow wells but may eventually be placed in the deep classification when a depth has been listed in the paperwork.

TABLE 5
Deep Well Status in the Delaware Basin

<i>Well Type</i>	<i>Texas</i>	<i>New Mexico</i>	<i>Totals</i>
Core Hole	5	0	5
Dry Hole	2,181	841	3,022
Gas Well	875	677	1,552
Injection Well	242	66	308
Junked and Abandoned Well	55	16	71
Oil Well	3,788	1,966	5,754
Oil and Gas Well	86	4	90
Plugged Gas Well	181	144	325
Plugged Injection Well	32	30	62
Plugged Oil Well	585	304	889
Plugged Oil and Gas Well	35	0	35
Plugged Brine Well	0	1	1
Plugged Salt Water Disposal Well	2	12	14
Plugged Service Well	2	0	2
Drilling or Waiting on Paperwork	14	3	17
Brine Well	8	0	8
Salt Water Disposal Well	6	105	111
Service Well	97	2	99
Stratigraphic Test Hole	43	2	45
Sulfur Core Hole	85	0	85
Potash Core Hole	0	19	19
WIPP Well	0	11	11
Other (Mine Shafts, Gnome Project Wells)	0	6	6
TOTALS	8,322	4,209	12,531

NOTE: The 17 wells under the category of "Drilling or Waiting on Paperwork" have a depth associated with them which classifies them as deep wells, but the paperwork classifying these wells as oil, gas, or some other type of well have yet to be posted. When posted, the classification of these types of wells will be changed.

TABLE 6
Past Drilling Rates for the Delaware Basin

<i>Year</i>	<i>No. of Deep Holes</i>	<i>Drilling Rate</i>
1996	10,804 Holes Deeper Than 2,150 Ft	46.8
1997	11,444 Holes Deeper Than 2,150 Ft	49.5
1998	11,616 Holes Deeper Than 2,150 Ft	50.3
1999	11,684 Holes Deeper Than 2,150 Ft	50.6
2000	11,828 Holes Deeper Than 2,150 Ft	51.2
2001	12,056 Holes Deeper Than 2,150 Ft	52.2
2002 ¹	12,139 Holes Deeper Than 2,150 Ft	52.5
2003	12,316 Holes Deeper Than 2,150 Ft	53.3

Note: The notable increase in the drilling rate between 1996 and 1997 was not due to the drilling of wells, but to the fact that the Delaware Basin Drilling Surveillance Program was not began until 1997 when a review of the records from July 1995 through 1997 was necessary to bring the databases up to date. Since that time, the drilling rate has risen approximately the same each year.

¹ In Rev. 3 of this report dated September 2002, the drilling rate for 2002 was shown as 52.9 with 12,219 deep holes. While reviewing the databases to develop reports for the Compliance Recertification Application, it was noticed that 80 shallow wells in Texas were listed as being deep. Several days investigation found the problem, and it was corrected. Correcting the classification of the 80 holes to shallow resulted in a reduction in the drilling rate from 52.9 to 52.5. This was reported in December 2002.

TABLE 7
Castile Brine Encounters in the Vicinity of the WIPP Site

#	Location	Well Name and No.	Spud Date	Status	Well Information
<i>Original CCA-related Castile Brine Encounters - 1896 Through June 1995</i>					
1	21S-31E-26	Federal #1	10/31/1979	P&A	Identified as encountering Castile Brine.
2	21S-31E-35	ERDA-6	06/13/1975	P&A	Identified as encountering Castile Brine.
3	21S-31E-35	Federal "FI" #1	09/25/1981	P&A	Identified as encountering Castile Brine.
4	21S-31E-36	Lost Tank "AIS" State #1	12/07/1991	Oil Well	Identified as encountering Castile Brine.
5	21S-31E-36	Lost Tank "AIS" State #4	11/19/1991	Oil Well	Identified as encountering Castile Brine.
6	21S-32E-31	Lost Tank SWD #1	11/12/1991	SWD	Identified as encountering Castile Brine.
7	22S-29E-09	Danford Permit #1	05/18/1937	P&A	Identified as encountering Castile Brine.
8	22S-31E-01	Unocal "AHU" Federal #1	04/02/1991	Oil Well	Identified as encountering Castile Brine.
9	22S-31E-01	Molly State #1	09/25/1991	Oil Well	Identified as encountering Castile Brine.
10	22S-31E-01	Molly State #3	10/20/1991	Oil Well	Identified as encountering Castile Brine.
11	22S-31E-02	State "2" #3	11/28/1991	Oil Well	Identified as encountering Castile Brine.
12	22S-31E-11	Martha "AIK" Federal #3	05/06/1991	Oil Well	Identified as encountering Castile Brine.
13	22S-31E-11	Martha "AIK" Federal #4	09/02/1991	Oil Well	Identified as encountering Castile Brine.
14	22S-31E-12	Federal "12" #8	03/28/1992	Oil Well	Identified as encountering Castile Brine.
15	22S-31E-13	Neff "13" Federal #5	02/04/1991	Oil Well	Identified as encountering Castile Brine.
16	22S-31E-17	WIPP-12	11/17/1978	Monitoring	Identified as encountering Castile Brine.
17	22S-32E-05	Bilbrey "5" Federal #1	11/26/1981	Oil Well	Identified as encountering Castile Brine.
18	22S-32E-15	Lechuzza Federal #4	12/29/1992	Oil Well	Identified as encountering Castile Brine.
19	22S-32E-16	Kiwi "AKX" State #1	04/28/1992	Oil Well	Identified as encountering Castile Brine.
20	22S-32E-25	Covington "A" Federal #1	02/07/1975	Oil Well	Identified as encountering Castile Brine.
21	22S-32E-26	Culberson #1	12/15/1944	P&A	Identified as encountering Castile Brine.
22	22S-32E-34	Red Tank "34" Federal #1	09/23/1992	Oil Well	Identified as encountering Castile Brine.
23	22S-32E-36	Richardson State #1	07/20/1962	P&A	Identified as encountering Castile Brine.
24	22S-32E-36	Shell State #1	02/22/1964	Oil Well	Identified as encountering Castile Brine.
25	22S-33E-20	Cloyd Permit #1	09/07/1937	P&A	Identified as encountering Castile Brine.
26	22S-33E-20	Cloyd Permit #2	06/22/1938	P&A	Identified as encountering Castile Brine.
27	23S-30E-01	Hudson Federal #1	02/25/1974	SWD	Identified as encountering Castile Brine.
<i>Castile Brine Encounters Since July 1995</i>					
1	21S-31E-35	Lost Tank "35" State #4	09/11/2000	Oil Well	Estimated several hundred barrels per hour. Continued drilling.
2	21S-31E-35	Lost Tank "35" State #16	02/06/2002	Oil Well	At 2,705 ft., encountered 1,000 B/H. Shut-in to get room in reserve pit with pressure of 180 psi. Shut-in next day with pressure at 100 psi and waterflow of 450 B/H. Two days later no water flow and full returns.
3	22S-31E-02	Graham "AKB" State #8	04/12/2002	Oil Well	Estimated 105 barrels per hour. Continued drilling.
4	23S-30E-01	James Ranch Unit #63	12/23/1999	Oil Well	Sulfur water encountered at 2,900 ft. 35 ppm was reported but quickly dissipated to 3 ppm in a matter of minutes. Continued drilling.
5	23S-30E-01	Hudson "1" Federal #7	01/06/2001	Oil Well	Estimated initial flow at 400 to 500 barrels per hour with a total volume of 600 to 800 barrels. Continued drilling.
6	22S-30E-13	Apache "13" Federal #3	11/26/2003	Oil Well	Encountered strong water flow with blowing air at 2,850-3,315 ft. No impact on drilling process.

TABLE 8
Plugged Well Information

#	Location	API #	Plug Date	R-111-P	Well Depth	Plug Depth	Plug Length
1	22S-27E-08	30-015-20718	01/12/2004	No	11,656 Ft	7860 5200 1,995-1,754 365-0	Unknown Unknown 241 Ft 365 Ft
2	22S-31E-25	30-015-25301	03/30/2004	Yes	15,026 Ft	6,016-5,524 4,800-642 Surface	492 Ft 4,158 Ft Unknown
3	23S-26E-13	30-015-20856	02/07/2004	No	12,050 Ft	11,560 8,800 5,650 5,440-5,319 2,000 470-341 60-0	Unknown Unknown Unknown 121 Ft Unknown 129 Ft 60 Ft
4	23S-26E-19	30-015-24425	02/17/2004	No	5,037 Ft	3,348 1,700-1,472 908-680 675-0	Unknown 228 Ft 228 Ft 675 Ft
5	23S-26E-19	30-015-24592	02/17/2004	No	5,215 Ft	4,650-4,404 2,450-2,204 1,650-1,060 50-0	246 Ft 246 Ft 590 Ft 50 Ft
6	23S-28E-02	30-015-27180	01/03/2004	No	6,356 Ft	5,865-5,618 2,633-2,430 405-240 60-0	247 Ft 203 Ft 165 Ft 60 Ft
7	23S-28E-33	30-015-26798	10/09/2003	No	6,300 Ft	6,050-5,750 2,650-2,202 1,080-850 605-437 153-0	300 Ft 448 Ft 230 Ft 168 Ft 153 Ft
8	23S-31E-35	30-015-25176	02/17/2004	No	15,377 Ft	8,220-5,970 5,962-5,290 4,540-1,012 649-446 100-0	2,250 Ft 672 Ft 3,528 Ft 203 Ft 100 Ft
9	23S-32E-22	30-025-34817	01/07/2004	No	8,950 Ft	7,050-7,020 6,550-6,290 4,800-4,740 2,000-1,890 665-552 35-0	30 Ft 260 Ft 60 Ft 110 Ft 113 Ft 35 Ft
10	23S-32E-34	30-025-33261	01/22/2004	No	10,200 Ft	4,621-4,416 3,000-2,868 1,300-1,074 750-458 60-0	205 Ft 132 Ft 226 Ft 292 Ft 60 Ft

<i>#</i>	<i>Location</i>	<i>API #</i>	<i>Plug Date</i>	<i>R-111-P</i>	<i>Well Depth</i>	<i>Plug Depth</i>	<i>Plug Length</i>
11	23S-32E-35	30-025-29337	11/17/2003	No	5,030 Ft	4,900-4,772 4,660-4,060 1,288-1,239 350-221 60-0	128 Ft 600 Ft 49 Ft 129 Ft 60 Ft
12	24S-32E-27	30-025-24948	09/09/2003	No	4,937 Ft	4,775-4,732 2,550-2,030 402-0	43 Ft 520 Ft 402 Ft
13	24S-33E-25	30-025-28533	08/06/2004	No	15,750 Ft	12,150-12,010 9,200-9,100 6,800-6,700 5,150-4,888 3,200-2,978 1,450-1,254 650-0	140 Ft 100 Ft 100 Ft 262 Ft 222 Ft 196 Ft 650 Ft
14	24S-34E-21	30-025-28641	03/18/2004	No	15,200 Ft	14,400 12,540-12,340 10,000-9,900 7,700-7,600 5,250-4,980 2,150-2,050 650-550 63-0	Unknown 200 Ft 100 Ft 100 Ft 270 Ft 100 Ft 100 Ft 63 Ft
15	25S-26E-01	30-015-28562	09/24/2003	No	5,650 Ft	4,975-4,750 4,725-4,476 2,900-2,700 1,900-1,648 350-0	225 Ft 249 Ft 200 Ft 252 Ft 350 Ft
16	25S-26E-13	30-015-23492	10/06/2003	No	11,774 Ft	10,800-5,045 3,150-2,970 2,500-2,150 1,850-1,663 1,200-1,000 250-0	5,755 Ft 180 Ft 350 Ft 217 Ft 200 Ft 250 Ft
17	25S-26E-26	30-015-29474	05/06/2004	No	3,200 Ft	1,850-1,492 1,150-957 450-0	358 Ft 193 Ft 450 Ft
18	25S-32E-22	30-025-27616	07/28/2004	No	15,850 Ft	6,975-6,875 4,850-4,577 2,450-2,180 700-471 60-0	100 Ft 273 Ft 270 Ft 229 Ft 60 Ft
19	25S-33E-21	30-025-30050	01/07/2004	No	16,050 Ft	9,350-9,286 6,416-6,271 4,925-4,741 2,000-1,900 1,450-1,350 690-564 61-0	64 Ft 145 Ft 184 Ft 100 Ft 100 Ft 126 Ft 61 Ft
20	26S-30E-34	30-015-26046	03/30/2004	No	6,125 Ft	4,850-4,605 3,419-3,223 2,950-2,781 615-514 60-0	245 Ft 196 Ft 169 Ft 101 Ft 60 Ft

<i>#</i>	<i>Location</i>	<i>API #</i>	<i>Plug Date</i>	<i>R-111-P</i>	<i>Well Depth</i>	<i>Plug Depth</i>	<i>Plug Length</i>
21	26S-31E-08	30-015-28768	12/04/2003	No	11,493 Ft	6,780 5,970-5,778 3,920-3,671 1,000-800 60-0	Unknown 192 Ft 249 Ft 200 Ft 60 Ft
22	26S-31E-19	30-015-25299	11/13/2003	No	12,927 Ft	6,700 5,880 3,340-3,143 950-850 60-0	Unknown Unknown 197 Ft 100 Ft 60 Ft
23	26S-32E-08	30-025-28483	03/01/2004	No	4,445 Ft	4,200-3,980 1,500-1,344 600-399 50-0	220 Ft 156 Ft 201 Ft 50 Ft
24	25S-26E-03	30-015-33187	06/01/2004	No	11,760 Ft	10,987-10,748 10,292-10,049 8,628-8,488 5,500-5,321 2,000-1,866 400-0	239 Ft 243 Ft 140 Ft 179 Ft 134 Ft 400 Ft
25	26S-30E-34	30-015-33367	07/29/2004	No	4,600 Ft	1,090-985 725-0	105 Ft 725 Ft

TABLE 9
Plugging Summary by Well Type

<i>Type</i>	<i>CRA</i>	<i>CRA Frequency</i>	<i>2003</i>	<i>2004</i>	<i>2005</i>	<i>2006</i>	<i>2007</i>	<i>Total</i>	<i>Current Frequency</i>	<i>Change</i>
I	116	34.1%	3	4				123	31.9%	-2.2%
II	60	17.7%	2	5				67	17.4%	-0.3%
III	111	32.6%	10	8				129	33.5%	+0.9%
IV	38	11.2%	3	5				46	11.9%	+0.7%
V	10	02.9%	1	1				12	03.1%	+0.2%
VI	5	01.5%	1	2				8	02.1%	+0.6%
TOTALS	340	100.0%	20	25				385	100.0%	

NOTE: The 1996 CCA used the 188 wells categorized into the above classifications to arrive at the percentage or frequency of each plugging event. The CRA followed up on that study and 152 wells were added to the original number to update the frequency. In 2003, 23 wells were plugged and abandoned in the New Mexico portion of the Delaware Basin. Three were ruled out because they were less than 2,150 feet deep. Twenty wells were categorized into one of the above plugging configurations and added to the count. For 2004, 25 wells were plugged and abandoned and all were added to the count. The change indicated above is between the current and the CRA frequencies for each type of plugging configuration.

TABLE 10
Seismic Activity in the Delaware Basin

<i>County</i>	<i>No. of Events</i>	<i>Earliest Event</i>	<i>Latest Event</i>	<i>Smallest Magnitude</i>	<i>Largest Magnitude</i>
Culberson	9	12/30/1997	12/19/2003	1	2.0
Eddy	5	04/24/1983	12/03/1998	1.1	3.5
Lea	1	04/24/2003	04/24/2003	2.0	2.0
Loving	3	02/04/1976	04/28/1997	1.1	1.3
Pecos	10	04/03/1977	12/22/1998	1	2.2
Reeves	16	08/03/1975	05/25/2002	1	2.5
Ward	26	09/24/1971	08/18/1984	0.8	3
Winkler	1	04/30/1976	04/30/1976	1.5	1.5
TOTALS	70	09/24/1971	08/04/2002	0.8	3.5

KEY:

Magnitude

Less than 2	Very seldom ever felt
2.0 to 3.4	Barely felt
3.5 to 4.2	Felt as a rumble
4.3 to 4.9	Shakes furniture; can break dishes
5.0 to 5.9	Dislodges heavy objects; cracks walls
6.0 to 6.9	Considerable damage to buildings
7.0 to 7.3	Major damage to buildings; breaks underground pipes
7.4 to 7.9	Great damage; destroys masonry and frame buildings
Above 8.0	Complete destruction; ground moves in waves

NOTE: Three of the five earthquake events in Eddy County can be directly attributed to mining activities. The other two remain unexplained. Most of the seismic events recorded in the vicinity of the Delaware Basin can be attributed to oil and gas activities - such as the number of events that continue to occur in the Dagger Draw or Cass Ranch area of Central Eddy County (outside of the Delaware Basin)- where a large number of oil and gas activities are being conducted.

TABLE 11
Nine-Township Injection and SWD Well Information

#	Location	API #	Status	Injection Zone	Permitted	Last Injection	Cumulative Barrels
1	21S-31E-33	30-015-29330	SWD	4166-5160	1998	April-2004	2,075,597
2	21S-32E-08	30-025-31412	SWD	4826-5978	1991	April-2004	6,685,111
3	21S-32E-31	30-025-31443	SWD	4618-6012	1992	April-2004	168,375
4	22S-30E-02	30-015-25758	Injection	7200-7264	1993	April-2004	8,603,134
5	22S-30E-02	30-015-26761	Injection	5600-7400	1991	April-2004	8,975,980
6	22S-30E-27	30-015-04734	SWD	3820-3915	1981	April-2004	2,541,766
7	22S-31E-02	30-015-32440	Injection	6989-7020	2003	No Report	No Report
8	22S-31E-24	30-015-26848	SWD	4519-5110	1991	April-2004	5,217,705
9	22S-31E-25	30-015-28281	Injection	7050-7068	1995	March-2004	4,971,521
10	22S-31E-35	30-015-26629	SWD	4500-5670	1991	April-2004	10,461,163
11	22S-31E-36	30-015-26171	SWD	4500-5700	1998	April-2004	3,641,181
12	22S-32E-05	30-025-27620	SWD	5150-8602	2004	April-2004	183,832
13	22S-32E-07	30-025-31076	SWD	4676-5814	1991	April-2004	6,359,301
14	22S-32E-11	30-025-31716	SWD	5200-8706	1994	April-2004	1,134,640
15	22S-32E-14	30-025-08113	SWD	4900-6080	1994	Dec-2003	3,049,986
16	22S-32E-16	30-025-31889	SWD	5240-8710	1995	April-2004	6,844,718
17	22S-32E-21	30-025-08109	SWD	4755-5110	1992	April-2004	2,238,897
18	22S-32E-27	30-025-32436	Injection	6831-8388	1998	No Report	No Report
19	22S-32E-28	30-025-31754	SWD	4690-5800	1993	April-2004	800,742
20	22S-32E-31	30-025-20423	SWD	4662-5915	1993	April-2004	3,494,793
21	22S-32E-35	30-025-33149	SWD	4950-6252	1995	April-2004	2,843,717
22	23S-30E-01	30-015-21052	SWD	4040-4825	2001	April-2004	1,094,676
23	23S-30E-16	30-015-20899	SWD	4433-5952	2002	April-2004	104,488
24	23S-30E-19	30-015-28901	SWD	3402-4609	1997	Dec-2002	933,224
25	23S-30E-29	30-015-28808	SWD	5479-7220	1996	April-2004	2,039,447
26	23S-30E-33	30-015-31744	SWD	4546-6760	2002	April-2004	1,116,302
27	23S-31E-02	30-015-05840	SWD	4489-5670	1997	April-2004	5,554,365
28	23S-31E-02	30-015-29792	SWD	4500-5850	1998	April-2004	5,205,489
29	23S-31E-20	30-015-30605	Injection	7740-7774	2001	Dec-2001	244,642
30	23S-31E-26	30-015-20277	SWD	4460-5134	1992	April-2004	3,694,063
31	23S-31E-26	30-015-20302	SWD	4390-6048	1971	April-2004	5,075,464

<i>#</i>	<i>Location</i>	<i>API #</i>	<i>Status</i>	<i>Injection Zone</i>	<i>Permitted</i>	<i>Last Injection</i>	<i>Cumulative Barrels</i>
32	23S-31E-27	30-015-27106	SWD	4694-5284	1998	April-2004	4,367,724
33	23S-31E-28	30-015-26194	SWD	4295-5570	1993	April-2004	3,398,594
34	23S-31E-35	30-015-25640	SWD	4484-5780	1993	April-2004	3,109,662
35	23S-31E-36	30-015-20341	SWD	5980-6560	1994	April-2004	8,921,611
36	23S-32E-04	30-025-31650	SWD	4884-5886	2001	April-2004	1,442,608
37	23S-32E-14	30-025-26844	SWD	5496-6014	1991	April-2004	1,155,246
38	23S-32E-23	30-025-33653	SWD	5954-6064	1999	June-2003	912,470
39	23S-32E-24	30-025-33521	SWD	5925-6042	2000	April-2004	1,194,155
40	23S-32E-29	30-025-31515	SWD	4844-4944	1992	April-2004	4,252,019
41	23S-32E-31	30-025-32868	SWD	5150-5700	1996	Dec-2002	657,195
42	23S-32E-36	30-025-31929	SWD	5364-6138	1995	Dec-2003	1,359,781

NOTE: Information collected from OCD offices in Artesia and Hobbs, New Mexico. Also, cumulative barrels information is collected from the internet site maintained by the New Mexico Institute of Mining and Technology on behalf of the New Mexico Oil Conservation Division and from B. L. Resources of Hobbs, New Mexico.

TABLE 12
Brine Well Status in the Delaware Basin

<i>County</i>	<i>Location</i>	<i>API #</i>	<i>Well Name and No.</i>	<i>Operator</i>	<i>Status</i>
Eddy	22S-26E-36	30-015-21842	City Of Carlsbad #WS-1	Key Energy Services	Brine Well
Eddy	22S-27E-03	30-015-20331	Tracy #3	Ray Westall	Plugged Brine Well
Eddy	22S-27E-17	30-015-22474	Eugenie #WS-1	I & W, Inc.	Brine Well
Eddy	22S-27E-17	30-015-23031	Eugenie #WS-2	I & W, Inc.	Plugged Brine Well
Eddy	22S-27E-23	30-015-28083	Dunaway #1	Mesquite SWD, Inc.	Brine Well
Loving	Blk 29-03	42-301-10142	Lineberry Brine Station #1	Chance Properties	Brine Well
Loving	Blk 01-82	42-301-30680	Chapman Ford #BR1	Herricks & Son Co.	Plugged Brine Well
Loving	Blk 33-80	42-301-80318	Mentone Brine Station #1D	Basic Energy Services	Brine Well
Loving	Blk 29-28	42-301-80319	East Mentone Brine Station #1	Permian Brine Sales, Inc.	Plugged Brine Well
Loving	Blk 01-83	42-301-80320	North Mentone #1	Chance Properties	Brine Well
Reeves	Blk 56-30	42-389-00408	Orla Brine Station #1D	Mesquite SWD, Inc.	Brine Well
Reeves	Blk 04-08	42-389-20100	North Pecos Brine Station #WD-1	Chance Properties	Brine Well
Reeves	Blk 07-21	42-389-80476	Coyanosa Brine Station #1	Chance Properties	Brine Well
Ward	Blk 17-20	42-475-31742	Pyote Brine Station #WD-1	Chance Properties	Brine Well
Ward	Blk 01-13	42-475-34514	Quito West Unit #207	Seaboard Oil Co.	Brine Well
Ward	Blk 34-174	42-475-82265	Barstow Brine Station #1	Chance Properties	Brine Well